
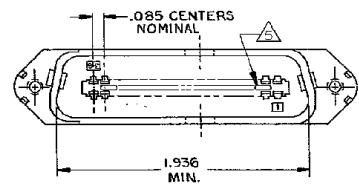
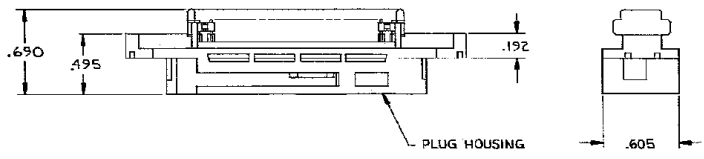


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	DATE	BY	APP'D
GP 00					
K		REVISED PER ECO-08-007327	26JAN2009	ZMR	WLM

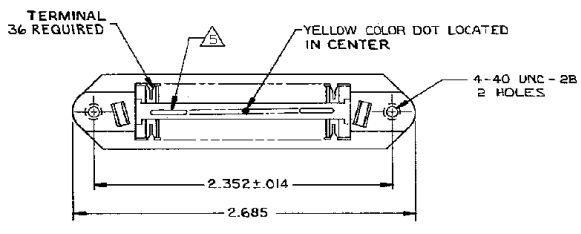

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
2. ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
3. MATERIAL:
  - HOUSING - POLYPHENYLENE (BLACK)
  - TERMINALS - HIGH STRENGTH COPPER ALLOY PLATED WITH EITHER .000030 MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL .000030 MIN TOTAL ON CONTACT MATING SURFACE. .000050 MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
4. WIRE SIZE: 26-27-28 AWG 7 STRANDS OF COPPER CONDUCTORS. MAX INSULATION  $\phi$ .045 IS ACCEPTABLE FOR MOST APPLICATIONS.
5. CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF TYCO ELECTRONICS.

AS SHOWN	552444-1
DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE	12-26-79	 Tyco Electronics Corporation Harrisburg, PA 17105-3608
BY: G. BOWMAN		DATE	12-27-79	
CHECKED: M.D. FRIEL		DATE	12-28-79	PLUG ASSY, 36 POSITIONS, E SLOT W/ 4-40 HOLES, CHAMP-LOK
APPROVED: B.G. WARD		DATE		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		
DIMENSIONS		APPLICATION SPEC		
0 PLC	#			
1 PLC	#			
2 PLC	#			
4 PLC	#			
ANGLES	#			
FINISH	#			
MATERIAL		WEIGHT		
CUSTOMER DRAWING		SIZE	A2	
		DWG CODE	00779	
		DRAWING NO	552444	
		SCALE	NTS	
		SHEET	1 of 1	
		REV	K	