

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
		C3		REVISED PER ECO-11-005027	15MAR2011	RK	HMR

1. CONDUCTOR
 NOMINAL STRANDING: 104/0100
 NOMINAL DIAMETER: .120
 2. JACKET CONSTRUCTION
 OUTSIDE DIAMETER: .215±.005
 COLOR: BLACK
 3. MARKING
 TE CONNECTIVITY 10 AWG (5.26mm²) XHHW-2 OR
 XHH OR RHW-2 OR RHH SR OR USE-2 SUNLIGHT
 RESISTANT (UL) 600V VMI UL LISTED.
- ⚠ PART COMES IN 30" DRUM.
5. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE
 2002/95/EC OF 27JAN2003 (ROHS).

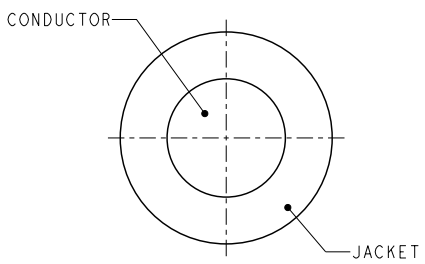

1000 FT REEL	1986164-3
500 FT REEL	1986164-2
5000 FT REEL	1986164-1
⚠ CABLE LENGTH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 03APR2007 CHK M. STRECKEWALD 03APR2007 APVD M. STRECKEWALD 03APR2007	TE Connectivity
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±.1 2 PLC ±.02 3 PLC ±.005 4 PLC ±.0005 ANGLES ±.	NAME SOLAR CABLE, UL-LISTED, 10 AWG PRODUCT SPEC - APPLICATION SPEC -	RESTRICTED TO -
MATERIAL -	FINISH -	WEIGHT - SIZE A3 CAGE CODE 00779 DRAWING NO C-1986164	
		CUSTOMER DRAWING	SCALE 10:1 SHEET 1 OF 1 REV C3