

**Specification Status: Released**

**Electrical Rating**


**Voltage: 32V<sub>DC</sub> MAX**  
**Current: 100A MAX**

Insulating Material:  
Cured, Flame Retardant Epoxy Polymer

Lead Material:  
24 AWG Tin Plated Copper Clad Steel

**Part Marking:**

- Manufacturer's Mark and Voltage
- XX 32 — Part Identification
- EF0.5 — Lot Identification (can be on back)
- — Lot Identification (can be on back)

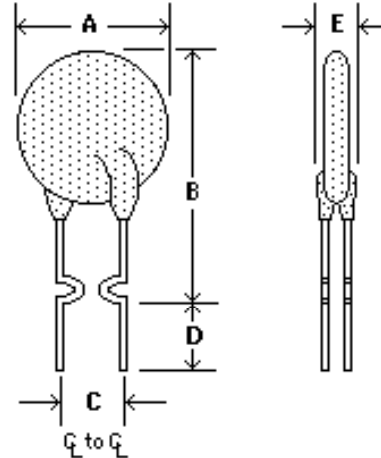

**TABLE I. DIMENSIONS:**

|      | A   |        | B   |        | C      |        | D      |     | E   |        |
|------|-----|--------|-----|--------|--------|--------|--------|-----|-----|--------|
|      | MIN | MAX    | MIN | MAX    | MIN    | MAX    | MIN    | MAX | MIN | MAX    |
| mm:  | --  | 7.4    | --  | 12.7   | 4.3    | 5.8    | 7.6    | --  | --  | 3.3    |
| in*: | --  | (0.29) | --  | (0.50) | (0.17) | (0.23) | (0.30) | --  | --  | (0.13) |

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS:**

| I HOLD RATED CURRENT | CURRENT RATINGS   |                   | INITIAL RESISTANCE VALUES |      | TIME TO TRIP               | RaMax            | TRIPPED-STATE POWER DISSIPATION |
|----------------------|-------------------|-------------------|---------------------------|------|----------------------------|------------------|---------------------------------|
| AMPS AT 25°C HOLD    | AMPS AT 25°C HOLD | AMPS AT 25°C TRIP | OHMS AT 25°C              |      | SECONDS AT 25°C, 2.5 A MAX | OHMS AT 25°C MAX | WATTS AT 25°C TYP               |
|                      |                   |                   | MIN                       | MAX  |                            |                  |                                 |
| 0.50                 | 0.50              | 1.00              | 0.35                      | 0.78 | 3.0                        | 1.10             | 0.9                             |

Reference Documents: PS400, PS300 (reference for R<sub>1 MAX</sub>)  
 Precedence: This specification takes precedence over documents referenced herein.  
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.  
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

**Materials Information**

**ROHS Compliant**

**ELV Compliant**

**Pb-Free**

Directive 2002/95/EC Compliant

Directive 2000/53/EC Compliant



**TABLE III. AUTOMOTIVE SPECIFIC STRESS TESTS AND TEST CONDITIONS:**

| ELECTRICAL STRESS TESTS                | TEST CONDITIONS (see note 2)     |
|--|----------------------------------|
| ESD Voltage Withstand<br>(see note 1)  | 25kV                             |
| Short Circuit Fault Current Durability | 25 cycles, 32V, 200A             |
| Fault Current Durability               | 350 cycles, 32V/100A             |
| End-of-life Mode Verification          | 1750 cycles, 32V/100A            |
| Jump Start Endurance<br>(see note 1)   | 3 cycles, 48V, 2 minute duration |
| Load Dump Endurance<br>(see note 1)    | 10 cycles, 86.5V                 |

Note 1: The PolySwitch devices are tested in series with a load resistance and the voltages specified in the test conditions are shared between the PolySwitch device and the load resistance as specified in PS400.

Note 2: Please refer to Appendix A of PS400 for the detailed test procedures

© 2008, 2011 Tyco Electronics Corporation, a TE Connectivity Ltd. Company. All rights reserved.