

**Specification Status: Released**

**Electrical Rating**


**Voltage: 60V MAX**  
**Current: 40A MAX**

Insulating Material:  
Cured, Flame Retardant Epoxy Polymer

Lead Material:  
20 AWG Tin Plated Copper

**Marking:**

- Manufacturer's Mark and Voltage
- XX 60
- KF 110 — Part Identification
- □ □ □ — Lot Identification (can be on back)

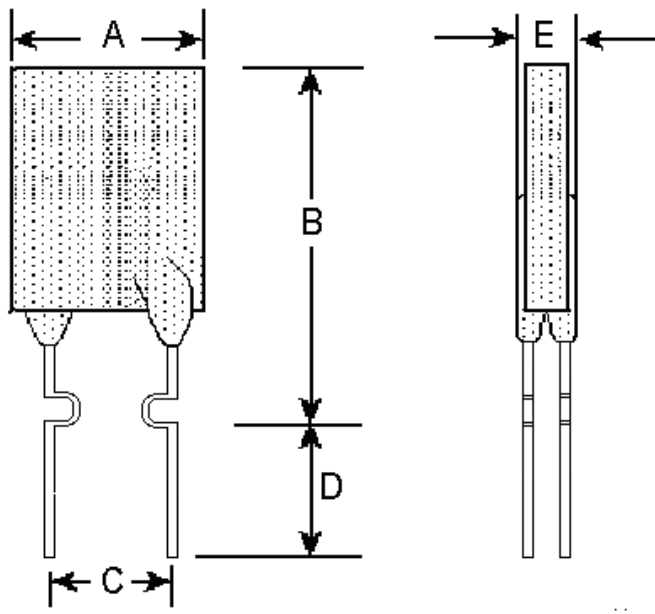

**TABLE I. INSTALLATION ENVELOPE DIMENSIONS:**

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	7.6	--	15.0	4.3	5.8	7.6	--	--	4.1
in*:	--	(0.30)	--	(0.59)	(0.17)	(0.23)	(0.30)	--	--	(0.16)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS:**

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	R <sub>1</sub> MAX 1 HR. POST TRIP RESISTANCE STANDARD TRIP	TRIPPED-STATE POWER DISSIPATION
AMPS AT 20°C HOLD	AMPS AT 20°C HOLD	AMPS AT 20°C TRIP	OHMS AT 20°C		SECONDS AT 20°C, 8 A MAX	OHMS AT 20°C MAX	WATTS AT 20°C TYP
			MIN	MAX			
1.10	1.10	2.20	0.17	0.28	3.0	0.47	2.2

Agency Recognitions:  
Reference Documents:  
Precedence:  
Effectivity:  
CAUTION:

UL, TUV, CSA  
PS300  
This specification takes precedence over documents referenced herein.  
Reference documents shall be the issue in effect on the date of invitation for bid.  
Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

**Materials Information**

**ROHS Compliant**

**ELV Compliant**

**Pb-Free**

Directive 2002/95/EC Compliant

Directive 2000/53/EC Compliant

