

4

3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
M1		REVISED PER ECO-11-005294		05APR11	RK	HMR	

NOTES:

- 1. FOR MINI-APPLICATOR-12500 PCS REEL.
- 2. FOR REEL-FEED HAND TOOLING-500 PCS REEL.
- 3. FOR HAND TOOLING- LOOSE PIECE.
- 4. MATERIAL: PHOSPHORBRONZE.
- 5. FINISH:
  - Ni UNDERPLATING ALL OVER.
  - CONTACT AREA PLATING MEETS IEC-807-3 PERFORMANCE LEVEL 2.
  - CRIMP ZONE Sn PLATED.

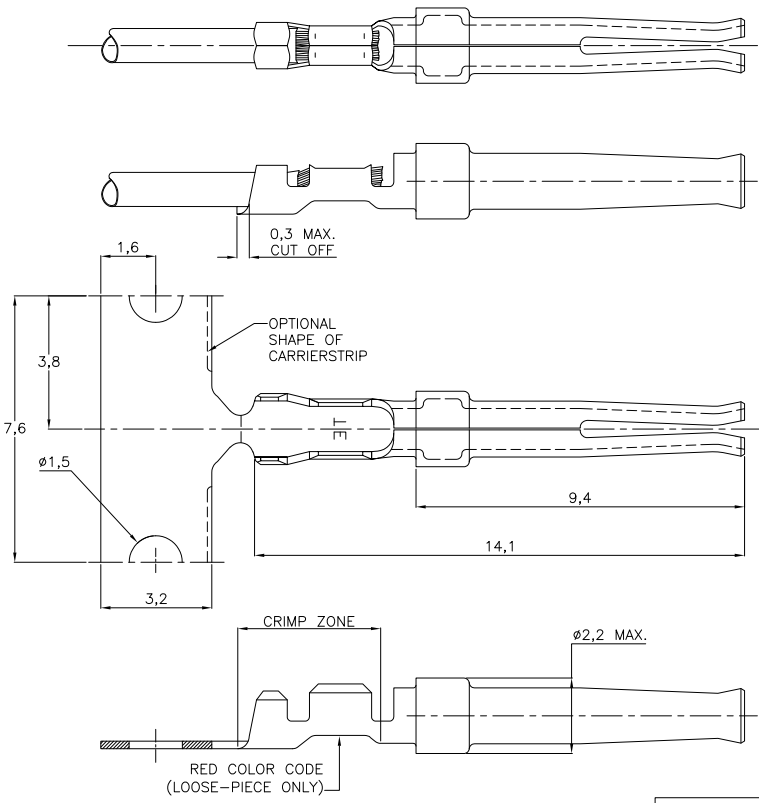

WIRE RANGE: 24-20 AWG(0,56-0,20mm<sup>2</sup>)  
 INSUL. RANGE: 1,27-1,52 DIA

5	166291-1	5-166051-1	166051-1
FINISH	LOOSE-PIECE 3	PARTNUMBER 2	PARTNUMBER 1
DWN	-		
CHK	K.MALCZYK 21AUG08	<b>TE</b> TE Connectivity	
APVD	T.DF. BOER 21AUG08	NAME	
PRODUCT SPEC		SOCKET CONTACT, SIZE 20 DF.	
APPLICATION SPEC		108-40005	
WEIGHT		114-10000	
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	©=166051	-
CUSTOMER DRAWING			SCALE NTS SHEET 1 of 1 REV M1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	± -
1 PLC	± 0,127
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -
MATERIAL	FINISH
-	-

