
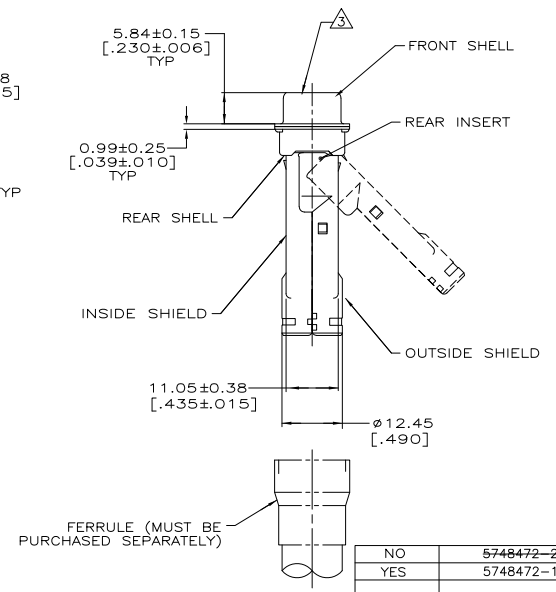


THIS DRAWING IS UNPUBLISHED.
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	APPD
0	12-21-04	RELEASED PER EC OS13-0257-04	LV	JG
01	10NOV09	REVISED PER ECO-09-024927	KK	AEG

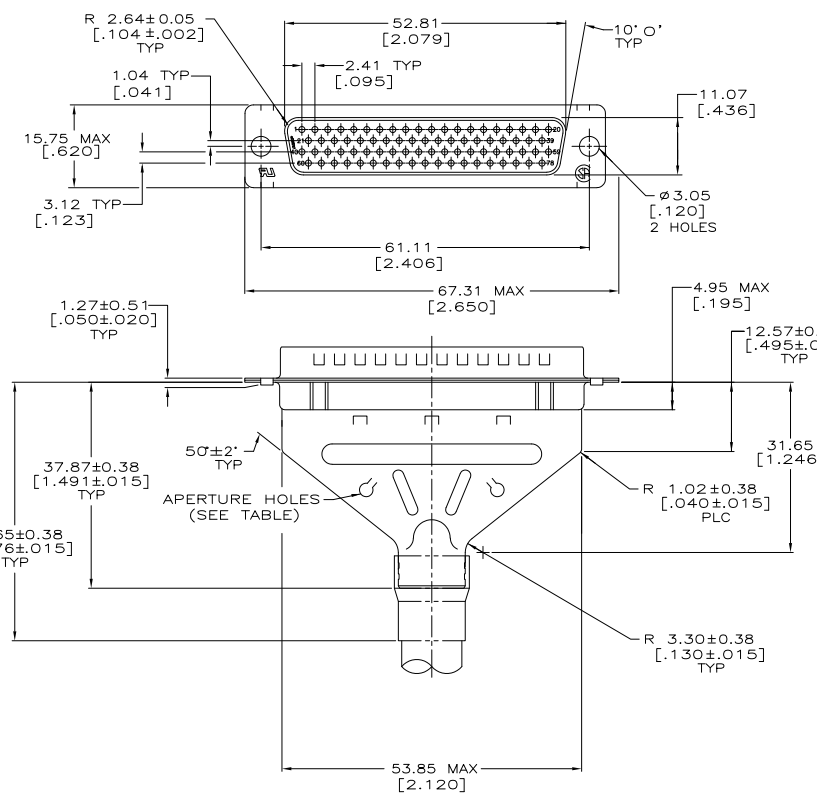

- ▲ INSERTS: NYLON, BLACK, UL 94V-0 RATED.
- SHELLS & SHIELDS: CARBON STEEL PER ASTM A109.
- ▲ SHELLS & SHIELDS: 5.08µm [.000200] MIN TIN OVER
2.54µm [.000100] MIN COPPER.
- ▲ PLUG ACCEPTS SIZE 22 PIN CONTACTS. (CONTACTS MUST BE PURCHASED SEPARATELY).
- ▲ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DW 12-21-04 VARELA - DOCKS DW 12-21-04 GERACE DW 12-21-04 M. WALMSLEY PRODUCT SPEC 108-126B APPLICATION SPEC 114-10001 WEIGHT CUSTOMER DRAWING	Tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608 PLUG KIT, UNASSEMBLED, SHIELDING HARDWARE, SIZE 5, 78 POSN, HDP-22, AMPLIMITE DRAWING NO 00779 ©=5748472 SCALE 2:1 SHEET 1 of 1 REV 01
DIMENSIONS: mm [inches] TOLERANCES UNLESS OTHERWISE SPECIFIED: Ø PLC ± . - 1 PLC ± . - 2 PLC ± 0.13 [.005] 3 PLC ± . - 4 PLC ± . - ANGLES ± 0° 30'		NO 5748472-2 ▲ YES 5748472-1 APERTURE HOLES PART NUMBER	