

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION APR. 1988.
 © COPYRIGHT 1988 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J		P	LTR	DESCRIPTION	DATE	DWN	APVD
		F2		REVISED PER ECO-11-005030	11MAR11	RK	HMR

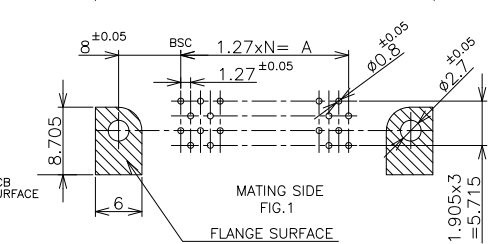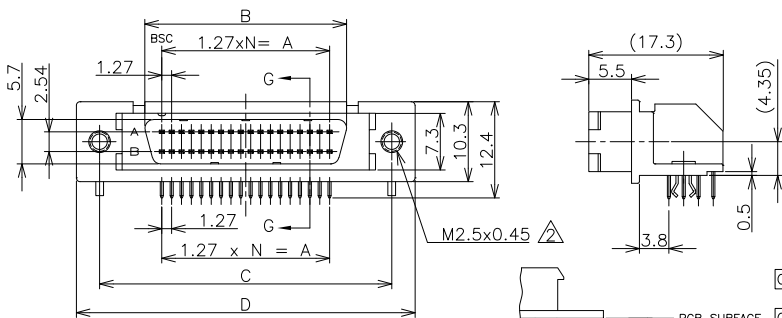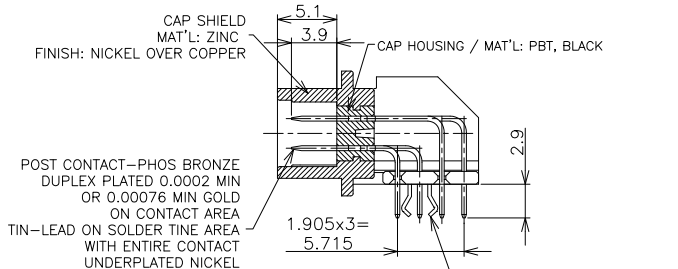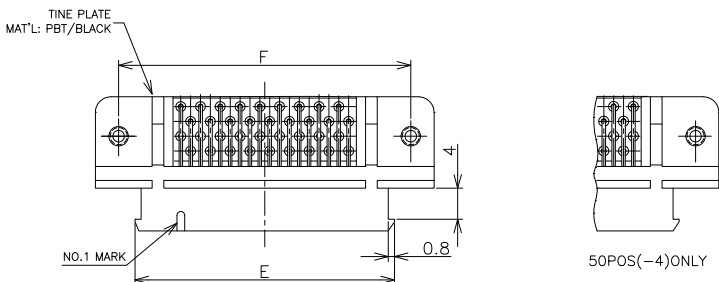

OBSOLETE	-96	47	59.69	64.06	75.7	81.7	71.49	75.7	0.00076 MIN	-2-174341-6
	68	33	41.91	46.28	57.9	63.9	53.71	57.9		-2-174341-5
	-50	24	30.48	34.85	46.5	52.5	42.28	46.5		-2-174341-4
OBSOLETE	-36	17	21.59	25.96	37.6	43.6	33.39	37.6	0.0002 MIN	-2-174341-3
	-28	13	16.51	20.88	32.5	38.5	28.31	32.5		-2-174341-2
	-20	9	11.43	15.8	27.4	33.4	23.23	27.4		-2-174341-1
OBSOLETE	-96	47	59.69	64.06	75.7	81.7	71.49	75.7	0.0002 MIN	-174341-6
	-68	33	41.91	46.28	57.9	63.9	53.71	57.9		-174341-5
	-50	24	30.48	34.85	46.5	52.5	42.28	46.5		-174341-4
	-36	17	21.59	25.96	37.6	43.6	33.39	37.6	-174341-3	
	-28	13	16.51	20.88	32.5	38.5	28.31	32.5	-174341-2	
	-20	9	11.43	15.8	27.4	33.4	23.23	27.4	-174341-1	

- 1 P.C BOARD HOLE LAY-OUT AS SHOWN FIG.1
- 2 USED SCREW SIZE; M2.5 PANHEAD SCREW
- 3 CONNECTOR TO BE MATED;
- X-174340-X
- 4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

GENERAL TOLERANCE
 10 ≥ : ±0.2
 30 ≥ > 10: ±0.25
 100 ≥ > 30: ±0.3
 ANGLES: ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 單位: 毫米 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 公差	DWN T.KAWAMAE 01JUL03	 TE Connectivity POST HEADER HORIZONTAL, WITH R/L AMPLIMITE .050 SERIES II CONN. TYPE B
 SEE ABOVE	 SEE ABOVE	CHK Y.YAMAMOTO 01JUL03	
		APVD Y.YAMAMOTO 01JUL03	
		NAME 名稱 Y.YAMAMOTO	
MATERIAL 材料 SEE ABOVE	FINISH 仕上 SEE ABOVE	PRODUCT SPEC 製品規格 108-5238-1	SIZE A.3
		APPLICATION SPEC 取付適用規格	CAGE CODE 00779
		WEIGHT	DRAWING NO 圖號 174341
		CUSTOMER DRAWING	RESTRICTED TO
			SCALE 尺度 2:1
			SHEET 1 of 1
			REV F2