

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS |     |                           |         |     |     |
|-----|------|-----------|-----|---------------------------|---------|-----|-----|
| AD  | 00   | P         | LTR | DESCRIPTION               | DATE    | MIN | APD |
|     |      | S4        |     | REVISED PER ECO-11-016144 | 09AUG11 | HMR | JO  |

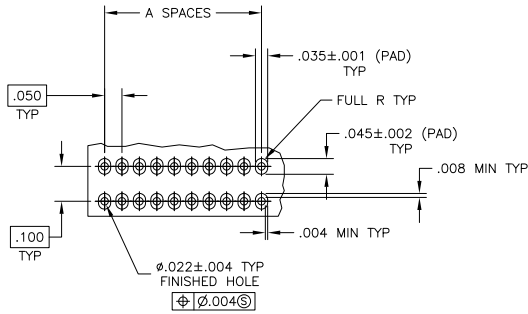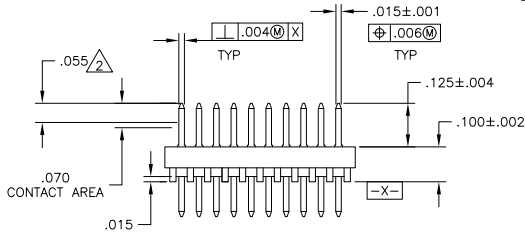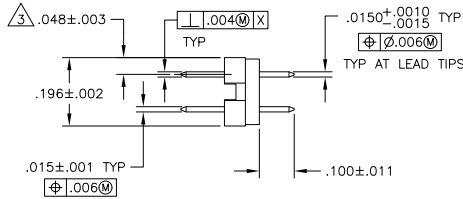

RECOMMENDED HOLE PATTERN FOR MANUAL INSERTION

- 1 CONTACT AREA PLATED WITH .000030 GOLD; SOLDER LEADS PLATED WITH .000150 MIN TIN-LEAD; ALL OVER .000050 MIN NICKEL
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 4 CONTACT AREA PLATED WITH .000030 GOLD; SOLDER LEADS PLATED WITH .000150 MIN TIN; ALL OVER .000050 MIN NICKEL
- 5 MATERIAL: HOUSING - THERMOPLASTIC, COLOR-BLACK CONTACT - COPPER ALLOY
- 6 ROHS 2002/95/EC COMPLIANT
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

| OBsolete                 | .915  | 17  | 36         | 6-103916-8 |
|--------------------------|-------|-----|------------|------------|
| 2.515                    | 49    | 100 | 6-103916-7 |            |
| 2.015                    | 39    | 80  | 6-103916-6 |            |
| 1.515                    | 29    | 60  | 6-103916-4 |            |
| 1.265                    | 24    | 50  | 6-103916-3 |            |
| 1.015                    | 19    | 40  | 6-103916-1 |            |
| .765                     | 14    | 30  | 5-103916-9 |            |
| .215                     | 3     | 8   | 5-103916-3 |            |
| .515                     | 9     | 20  | 5-103916-2 |            |
| OBsolete                 | .915  | 17  | 36         | 1-103916-8 |
| 2.515                    | 49    | 100 | 1-103916-7 |            |
| 2.015                    | 39    | 80  | 1-103916-6 |            |
| SUPERSEDED               | 1.815 | 35  | 72         | 1-103916-5 |
| SUPERSEDED BY 6-103916-4 | 1.515 | 29  | 60         | 1-103916-4 |
| 1.265                    | 24    | 50  | 1-103916-3 |            |
| OBsolete                 | 1.115 | 21  | 44         | 1-103916-2 |
| 1.015                    | 19    | 40  | 1-103916-1 |            |
| OBsolete                 | .865  | 16  | 34         | 1-103916-0 |
| SUPERSEDED               | .765  | 14  | 30         | 103916-9   |
| OBsolete                 | .665  | 12  | 26         | 103916-8   |
| SUPERSEDED               | .615  | 11  | 24         | 103916-7   |
| SUPERSEDED               | .415  | 7   | 16         | 103916-6   |
| OBsolete                 | .365  | 6   | 14         | 103916-5   |
| OBsolete                 | .315  | 5   | 12         | 103916-4   |
| OBsolete                 | .215  | 3   | 8          | 103916-3   |
| OBsolete                 | .515  | 9   | 20         | 103916-2   |
| OBsolete                 | .265  | 4   | 10         | 103916-1   |

| B | A | NO OF POSN | PART NUMBER |
|---|---|------------|-------------|
|---|---|------------|-------------|

THIS DRAWING IS A CONTROLLED DOCUMENT. DIM: D. CLOUSER 10-3-08

TE Connectivity

108-1093

114-25031

00779

SCALE: 5:1 SHEET: 1 of 1 REV: S4