






4 3 2 1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION MAY, 1991.
 © COPYRIGHT 1991 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J		P	LTR	DESCRIPTION	DATE	DWN	APVD
		C1		REVISED PER ECO-09-024717	07NOV09	KK	AEG

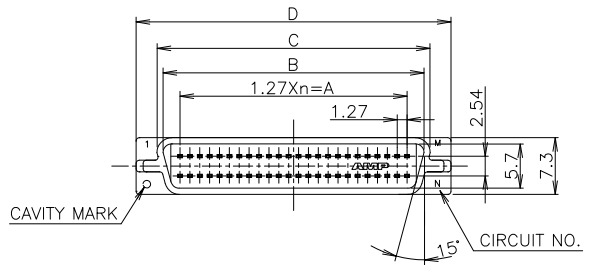

- 1 MATERIAL AND FINISH
 CAP HOUSING : L.C.P A-130 (UL94V-0) COLOR:BLACK
 POST CONTACT : PHOS-BRONZE FINISH, OVER NICKEL
 MATING END: 0.0003 MIN.
 OR 0.00076 MIN. GOLD
 TERMINATION END: TIN
 OVER SEALING TREATMENT.
- 2 P.C.B. LAYOUT AND P.C.B. TREATMENT (REF.)
 USE A P.C.B. SURFACE ARE TREATED WITH SOLDER RESIST.
- 3 KINK POSITIONS (4 POSITIONS).
- 4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
 PER D.RENAUD/D.SINISI

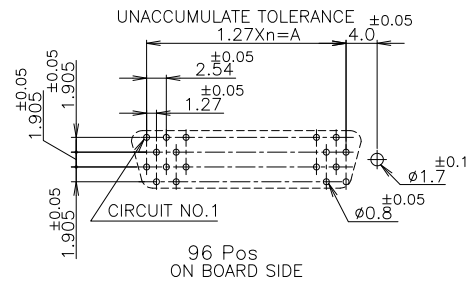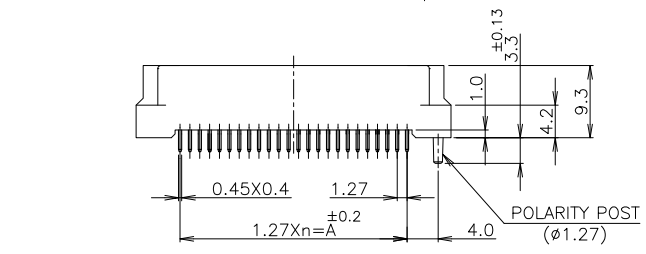

OBsolete	Au PL 0.00076 MIN.	96	48	59.69	64.06	65.66	71.00	47	96	6-178857-8
	Au PL 0.0003 MIN.	96	48	59.69	64.06	65.66	71.00	47	96	-178857-8
	REMARK	N	M	A	B	C	D	n	POS.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Y.SATO CHK Y.KASHIWA APVD R.NISHIMURA	20MAY91 10JUL91 11JUL91	Tyco Electronics Kawasaki, Japan		Tyco Electronics AMP K.K.	
DIMENSIONS: 単位: 概 MM	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	PRODUCT SPEC 製品規格	APPLICATION SPEC 取付適用規格	SIZE A.3	CAGE CODE 00779	DRAWING NO. 番号 178857	RESTRICTED TO C1
GENERAL TOLERANCE 一般公差	FINISH 仕上	CAP ASSY VERTICAL W/KINK & W/RIGHT POST LCP FOR AMPLIMITE .050 SERIES I B-T-B CONN.		SCALE 尺度	2:1	SHEET 1 of 1	REV C1

鉛フリー
LEAD FREE

GENERAL TOLERANCE
一般公差
10 ≥ : ±0.2
30 ≥ > 10 : ±0.25
100 ≥ > 30 : ±0.3
ANGLES : ±3°