THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
GP	00	P	LTR	DESCRIPTION	DATE	DRN	APVD
			K	REV PER ECO-12-000090	31JAN2012	CJV	SLB

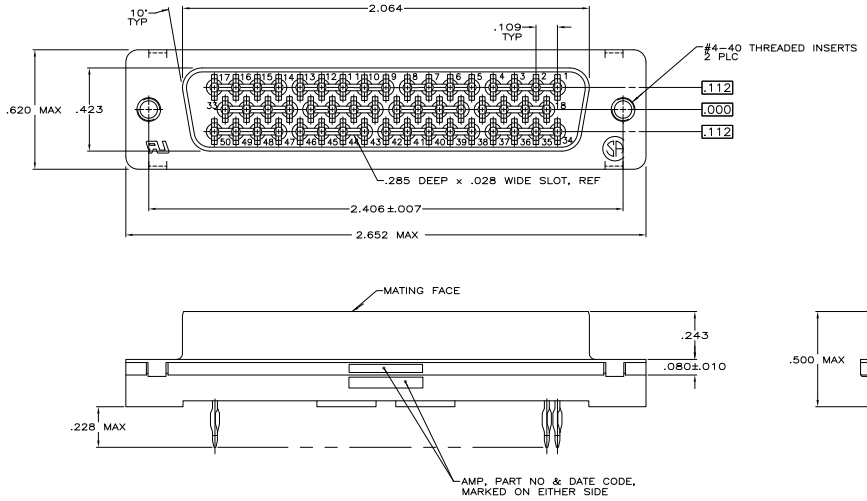

1. NOTE REMOVED.
2. FOR USE WITH .062 MINIMUM THICK PRINTED CIRCUIT BOARD. REFER TO APPLICATION SPECIFICATION FOR PRINTED CIRCUIT BOARD LAYOUT DIMENSIONS AND FINISH RECOMMENDATIONS
3. PLATED WITH BRIGHT TIN.
4. GOLD FLASH IN MATING AREA, .000100 MINIMUM TIN OR TIN-LEAD ON COMPLIANT PIN. ALL OVER .000050 MINIMUM NICKEL.
5. .000030 MINIMUM GOLD IN MATING AREA, .000100 MINIMUM TIN OR TIN-LEAD ON COMPLIANT PIN. ALL OVER .000050 MINIMUM NICKEL.
   -OR-
   GOLD FLASH OVER PALLADIUM NICKEL .000030 MINIMUM TOTAL IN MATING AREA. .000100 MINIMUM TIN OR TIN-LEAD ON COMPLIANT PIN. ALL OVER .000050 MINIMUM NICKEL.
6. FLAME RETARDANT, 94V-0 RATED, GLASS FILLED, NYLON OR POLYESTER, COLOR: BLACK.
7. CARBON STEEL.

	5	748485-2
OBSOLETE	4	748485-1
	CONTACT FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± -; 1 PLC ± -; 2 PLC ± -; 3 PLC ± .005; 4 PLC ± -; ANGLES ± 2°

MATERIAL: HOUSING: CONTACTS: COPPER ALLOY SHELL: INSERTS: BRASS

FINISH: CONTACTS: SEE TABLE SHELL:

DWN D.HARDY 04-12-94
CHK R.STONE 04-26-94
APVD -
PRODUCT SPEC 108-40014
APPLICATION SPEC 114-40026 2
WEIGHT -
CUSTOMER DRAWING

TE Connectivity

NAME: RCPT ASSY, SIZE 5, 50 POSN, METAL SHELL W/ #4-40 INSERTS & ACTION PIN CONT, MDM PROFILE, AMPLIMITE™HD-20

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-748485 | RESTRICTED TO -

SCALE 4:1 | SHEET 1 OF 1 | REV K

Downloaded from Elcodis.com electronic components distributor