

4



3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.




LOC	DIST	REVISIONS					
J	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		E3		REVISED PER ECO-11-005140	28MAR11	RK	HMR

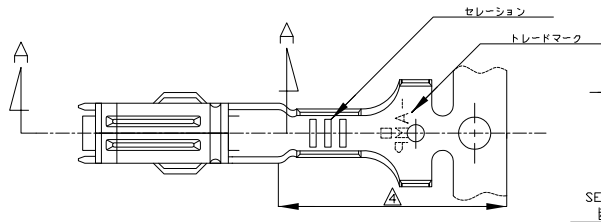

注  
 1. 嵌合相手端子型番 ; 171631  
 △ 部分金めっき 0.38 μm 最小  
 △ 部分金めっき 1.27 μm 最小  
 △ 部分半田めっき 2.0 μm 最小  
 5. 一般公差 : 10以下±0.2 10以上30以下±0.25 30以上100以下±0.3 角度±3°



NOTE ;  
 1. TAB CONTACT ; 171631  
 △ SELECTIVE GOLD PLATING 0.38 μm MIN.  
 △ SELECTIVE GOLD 1.27 μm MIN.  
 △ SELECTIVE TIN-LEAD PLATING 2.0 μm MIN.  
 5. TOLERANCES UNLESS OTHERWISE SPECIFIED.  
 10MAX : ±0.2 10-30 : ±0.25 30-100 : ±0.3 ANGLES : ±3°

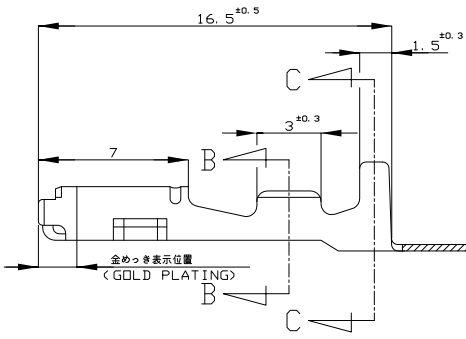

OBSELETE	SELECTIVE GOLD PLATING 部分金めっき	PHOS-BRONZE t = 0.3 リン青銅 板厚 0.3	171630-6
	SELECTIVE GOLD PLATING 部分金めっき	PHOS-BRONZE t = 0.3 リン青銅 板厚 0.3	171630-5
	PRE-TIN 鍍めつき済(0.76 μm MIN.)	PHOS-BRONZE t = 0.3 リン青銅 板厚 0.3	171630-2
	PRE-TIN 鍍めつき済(0.76 μm MIN.)	BRASS t = 0.3 黄銅 板厚 0.3	171630-1
	FINISH 仕上	MATERIAL 材料	PART NUMBER 型番

適合電線断面積 (WIRE RENGE)	被覆外径 (INSULATION DIA)
AVS 0.2-0.5mm <sup>2</sup> (AWG24-20)	1.4-2.4mm φ

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 種 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	DWN D.MATSUURA 240CT07	CHK T.KOHNO 240CT07	APVD Y.FUJIWARA 240CT07	NAME 名称			
0 PLC ±	1 PLC ±	2 PLC ±	3 PLC ±	4 PLC ±	ANGLES ±	FINISH 仕上		
MATERIAL 材料	SEE TABLE	PRODUCT SPEC 製品規格 108-5262	APPLICATION SPEC 取付適用規格 114-5082	WEIGHT 0.35g	SIZE A3	CAGE CODE 00779	DRAWING NO 番号 171630	RESTRICTED TO
CUSTOMER DRAWING				SCALE 尺度 5:1	SHEET 1 OF 1	REV E3		

**STE** TE Connectivity  
 ECONOSEAL J MK-II CONN RECEPTACLE CONTACT