

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION.
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
HM	00	F	LR	DESCRIPTION	DATE	BY	APP'D
		A		RLSD PER NSD05-028	21APR05	LH	CD
		B		REV ECD-09-016132	10JUL09	LH	BM
		C		REV ECD-09-020340	17SEP09	LH	BM

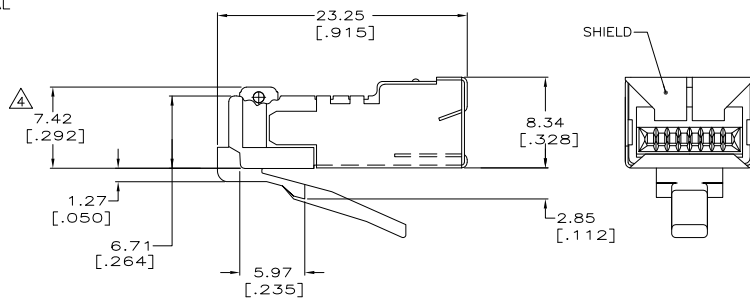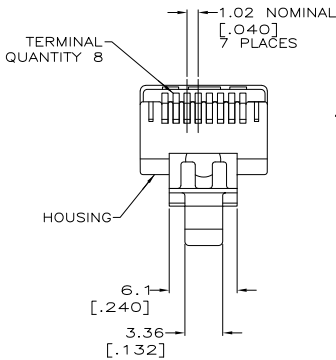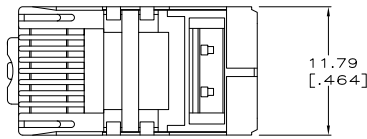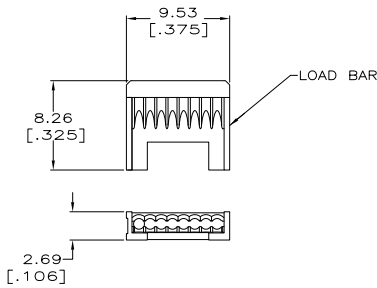

- ⚠ DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- ⚠ MATERIAL: HOUSING - POLYCARBONATE, CLEAR TERMINAL - PHOSPHOR BRONZE, PLATED WITH 1.27μm [.000050] MINIMUM THICK GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH OVER THE REMAINDER, OVER 2.54μm [.000100] MINIMUM THICK NICKEL UNDERPLATE. SHIELD - COPPER ALLOY WITH 1.27μm[0.000050] MINIMUM SEMI-BRIGHT (SATIN) NICKEL. LOAD BAR - PBT POLYESTER, BLACK.
- 3. PLUG WILL ACCEPT A 24 OR 26 AWG STRANDED CONDUCTOR, PROVIDED THE INSULATED CONDUCTOR DIAMETER IS 0.89[.035] TO 0.99[.039] WITH A SHIELDED, PLIABLE, LOOSE CABLE JACKET OF 4.83[.190] TO 5.21[.205] DIAMETER OR A SHIELDED, RIGID, HARD CABLE JACKET OF 4.83[.190] TO 5.08[.200] DIAMETER.
- ⚠ TERMINATED DIMENSION 6.15 [.242] MAXIMUM.
- ⚠ 500 ASSEMBLIES AND 500 LOAD BARS PER PACKAGE.
- ⚠ 100 ASSEMBLIES AND 100 LOAD BARS PER PACKAGE.
- ⚠ 25 ASSEMBLIES AND 25 LOAD BARS PER PACKAGE.

LEAD FREE

⚠	5-1479967-4
⚠	5-1479967-3
⚠	5-1479967-2
PACKAGED	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLG ± .010	1 PLG ± .010	2 PLG ± .010	3 PLG ± .010	4 PLG ± .010	ANGLES ± .5°	FINISH -
-------------------------	--	--------------	--------------	--------------	--------------	--------------	--------------	----------

DRN L. HALL 21APR2005	21APR2005	21APR2005	21APR2005
CHK C. DOOLEY	C. DOOLEY	C. DOOLEY	C. DOOLEY
APPC C. DOOLEY	NAME	PRODUCT SPEC	108-1163
APPLICATION SPEC	114-6053	SIZE	A2
WEIGHT	-	CAGE CODE (DRAWING NO)	00779
CUSTOMER DRAWING	SCALE	4:1	SHEET 1 OF 1

Tyco Electronics Corporation
 Harrisburg, Pa 17105-3608

MODULAR PLUG ASSEMBLY,
 8 POSITION, SHIELDED, ROUND CABLE,
 STRANDED WIRE, HIGH PERFORMANCE

RESTRICTED TO

1479967