

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		DS	EL		
HM	00	F	LTR	DESCRIPTION	DATE	BY	APP'D
		C		QBS/S/2/EC 0502-0824-97	19MAY98	DS	EL
		D		REV ECO-08-007212	31MAR08	LH	BM

- ⚠ DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- ⚠ MATERIAL: HOUSING- POLYCARBONATE BLUE. TERMINAL- PHOSPHOR BRONZE, PLATED WITH 1.27µm [.000050] MINIMUM THICK GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH ON THE REMAINDER, OVER 2.54µm [.000100] MINIMUM THICK NICKEL UNDERPLATE.
- 3. PLUG WILL ACCEPT 26 OR 28 AWG STRANDED WIRE, 0.74-0.86 [.029-.034] DIAMETER, WITH AN OVAL CABLE JACKET OF 2.29 X 6.61 [.090 X .260] MAXIMUM.
- ⚠ TERMINATED DIMENSION 6.15 [.242] MAXIMUM.
- ⚠ 100 ASSEMBLIES PER PACKAGE.

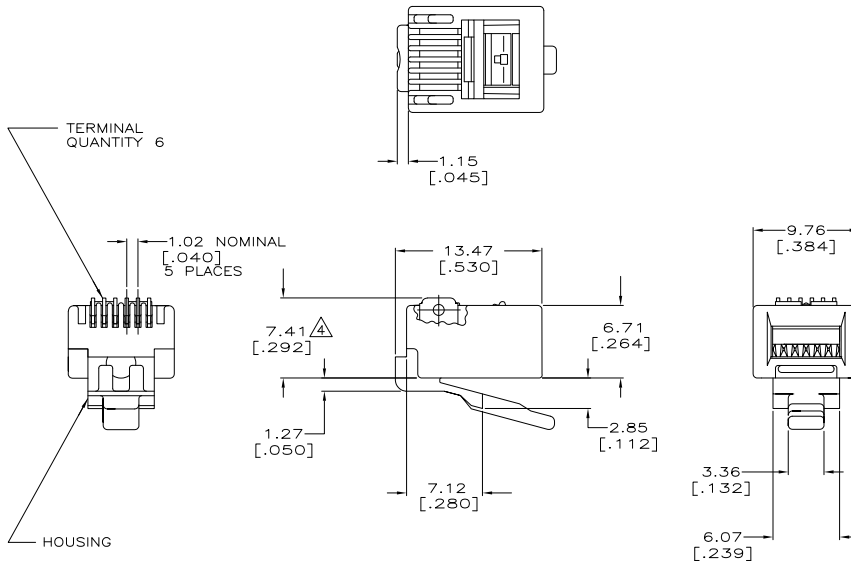

⚠	5-557971-3
PACKAGED	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DM	S. SIMPSON	6-8-93	Tyco Electronics Corporation	
		CHK	C. WHITT	6-21-93	Harrisburg, PA 17105-3608	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
MM (INCHES)				PRODUCT SPEC		
0 PLC		-		108-1163		
1 PLC		-		APPLICATION SPEC		
2 PLC		-		114-6016		
3 PLC		-		SIZE		
4 PLC		-		A2		
ANGLES		-		CAGE CODE (FOWING ID)		
FINISH		-		00779		
MATERIAL		-		C=557971		
		-		RESTRICTED TO		
		-		CUSTOMER DRAWING		
		-		SCALE		
		-		4:1		
		-		SHEET		
		-		1 of 1		
		-		REV		
		-		D		

AMP 1471-9 REV 31MM2000

557971

A