

4



3

2






1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TE CONNECTIVITY ALL RIGHTS RESERVED.
 COPYRIGHT 20

| REV | DATE | BY | APPV | DESCRIPTION |
|-----|-----------|----|------|--|
| B2 | 26AUG2011 | PS | RRP | DURABILITY CYCLE UPDATED AFTER TESTING |
| - | - | - | - | - |
| - | - | - | - | - |
| - | - | - | - | - |



NOTE:
 1. TOLERANCE UNLESS OTHERWISE SPECIFIED: ±0.15.
 2. DURABILITY IS 200 CYCLES MAX ACCORDING TO TEST REPORT 502-19807 THIS WILL TAKE PRECEDENCE OVER THE PRODUCT SPECIFICATION.

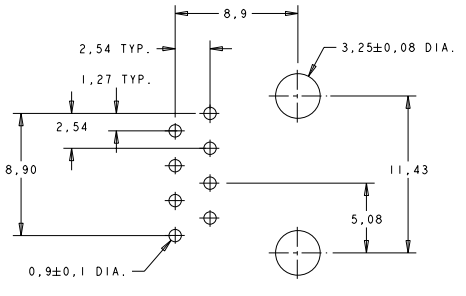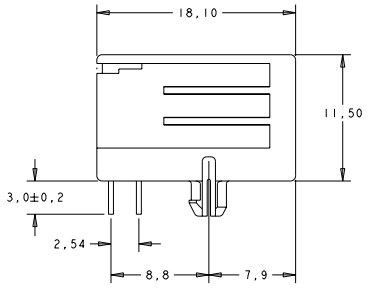

| PACKAGING | FINISH | MATERIAL | HOUSING | CONTACT INSERT | CONTACTS | PART NUMBER |
|-------------------------------|--------|-------------------|-----------------------------------|----------------|-----------|-------------|
| 200 PIECES IN A TRAY | | | HSG COLOR: GREY PBT, UL 94V-0 | PBT, UL 94V-0 | PH BRONZE | 1705951-4 |
| 1000 PIECES IN A BOX | | | HSG COLOR: GREY PBT, UL 94V-0 | PBT, UL 94V-0 | PH BRONZE | 1705951-3 |
| 1000 PIECES IN A BOX | | 8 POS./8 CONTACTS | HSG COLOR: BLACK PBT, UL 94V-0 | PBT, UL 94V-0 | PH BRONZE | 1705951-2 |
| 200 PIECES IN A TRAY | | | HSG COLOR: BLACK PBT, UL 94V-0 | PBT, UL 94V-0 | PH BRONZE | 1-1705951-1 |
| TAPE MOUNTED 700 PCS./REEL | | | HSG COLOR: BLACK PBT, UL 94V-0 | PBT, UL 94V-0 | PH BRONZE | 1705951-1 |

| | | | |
|--|--|------------------|------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DRN | J. V. D. HEIJDEN |
| DIMENSIONS: mm | | APPV | P. WILLEMS |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | PRODUCT SPEC | 108-19064 |
| 0 PLC ±0.15 | | APPLICATION SPEC | 114-19019 |
| 1 PLC ±0.15 | | WEIGHT | - |
| 2 PLC ±0.15 | | CUSTOMER DRAWING | SCALE 5:1 |
| 3 PLC ±0.15 | | | SHEET 1 OF 1 |
| 4 PLC ±0.15 | | | REV B2 |
| ANGLES ±0.15 | | | |
| FINISH | | | |

PRINTED CIRCUIT BOARD LAYOUT
 (VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD.)
 PRINTED CIRCUIT BOARD THICKNESS: 1.6 mm NOMINAL
 TOLERANCE UNLESS OTHERWISE SPECIFIED: ±0.05

1471-9 (3/11)
 PRO/ENGINEER DRAWING