

4




3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED. (C) COPYRIGHT 2003


LOC	DIST	REV	DESCRIPTION	DATE	OWN	AFWD
J	-	-	-	-	-	-
		A2	REVISED PER ECR-06-030125	20020904	S.K.	J.A.
		B	REVISED PER ECR-07-010603	07MAY2007	S.K.	J.A.
		C	REVISED PER ECR-08-020709	18AUG2008	S.K.	S.M.




- △ MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: BLACK
- △ MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: (SEE TABLE)
- △ MATERIAL: SILICONE
COLOR: GREEN
- 4. WIRE INSULATION RANGE: $\phi 1.3 \sim \phi 2.3$

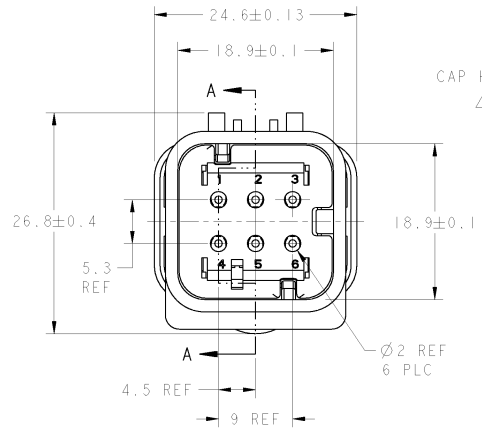

1717975-1 SHOWN

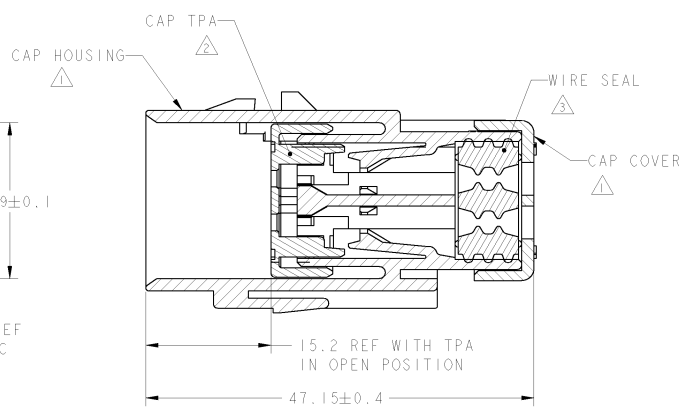

SECTION A-A



YELLOW	1717975-3
GRAY	1717975-2
RED	1717975-1
TPA COLOR	PART NUMBER

DIMENSIONS:		OWN		TYCO ELECTRONICS AMP R.P.	
mm		I. KATO		Kawasaki, Japan	
		S. MANABE			
		S. MANABE			
		S. MANABE			
		APPLICATION SPEC		BRACKET REVERSE TYPE, SMALL WIRE SIZE	
		114-13065		AMPSEAL 16	
		WEIGHT		RESTRICTED TO	
		CUSTOMER DRAWING		A2100779 C=1717975	
				SCALE 3:1 SHEET 1 OF 1 REV C	

AMP 1471-6 REV 2004000
PFA/ENGINEER DRAWING