

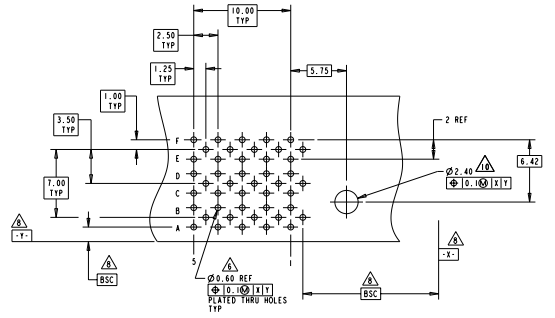

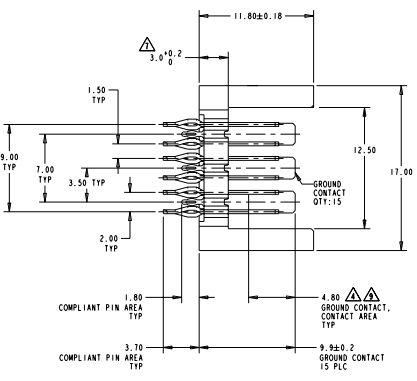


REV	DATE	DESCRIPTION	BY	CHK	APP
J		REVISED PER ECO-11-013132	13.06.2011	MMR	MM

- ▲ PHOSPHOR BRONZE
- ▲ LCP, UL94V-0
- ▲ CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF THE CONNECTIVITY PRODUCT SPECIFICATION 100-1997, BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
- ▲ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- ▲ REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES
- ▲ APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- ▲ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- ▲ CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995
- ▲ HOLE DIAMETER SHOULD BE 3.10 WHEN USING FEED THROUGH GUIDE PIN P/N 120759 CLEARANCE FOR A M3X0.5 THREAD

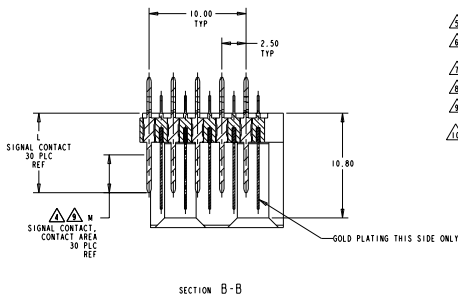

5.30	9.7	120678-2
3.90	8.2	120678-1
M	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 11 JAN 99

DESIGNED BY: JIM ANDREWS DATE: 11 JAN 99  
 DRAWN BY: JIM ANDREWS DATE: 11 JAN 99  
 CHECKED BY: JIM ANDREWS DATE: 11 JAN 99  
 APPROVED BY: JIM ANDREWS DATE: 11 JAN 99

APPLICATION SPEC: 114-13020

SIZE: A CASE CODE: 00778 DRAWING NO: 120678

REVISION: 1 SHEET OF 1

DATE: 11 JAN 99

DESCRIPTION: HEADER ASSEMBLY, 30 POSITION, LEFT HAND, 8 ROW, Z-PACK, HSS

CUSTOMER DRAWING