

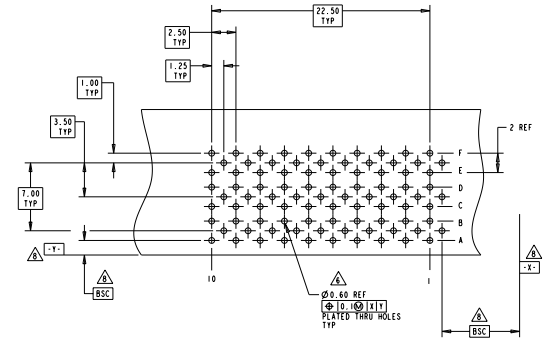
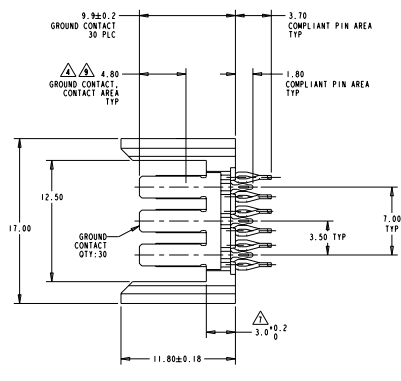
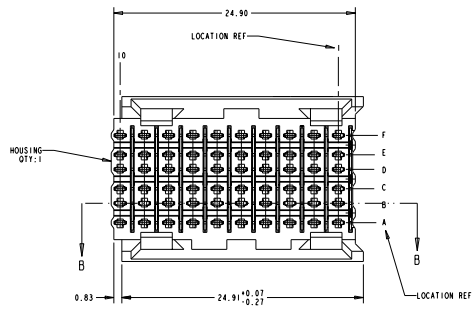


8	7	6	5	4	3	2	1
DATE VARIATION TO IMPROVEMENTS	REVISIONS FOR PUBLICATION						
0000000000	ALL RIGHTS RESERVED						

REV	DATE	DESCRIPTION	BY	CHK	APP
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					

- △ PHOSPHOR BRONZE
- △ LCP, UL94V-0
- △ CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 100-1557, BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- △ REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES
- △ APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- △ DATINGS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- △ CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

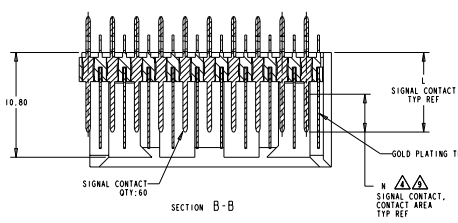

5.30	9.7	120674-2
3.90	8.2	120674-1
M	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 5/18/99

REVISED: 5/18/99

DATE: 5/18/99

TE Connectivity

HEADER ASSEMBLY, 60 POSITION, 6 ROW, BACKPLANE CONNECTOR, 2-PACK HCS

STATE: CA CASE CODE: 00778 DRAWING NO: 120674

REVISION: A

CUSTOMER DRAWING

DATE: 5/18/99

BY: [Signature]

CHK: [Signature]

APP: [Signature]