
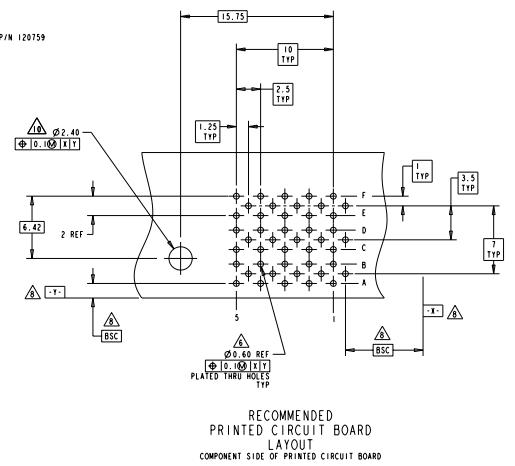
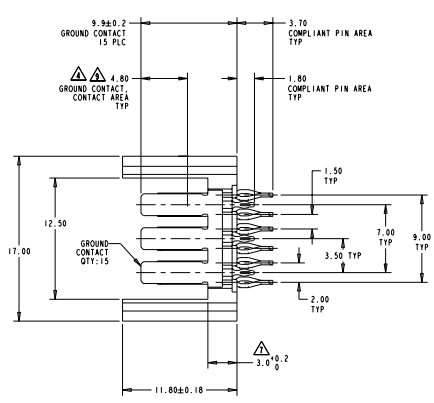
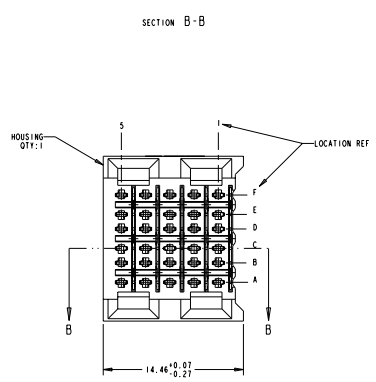


8	7	6	5	4	3	2	1
DATE REVISION TO IMPLEMENTED	REVISION FOR PUBLICATION	ALL RIGHTS RESERVED					
02/03/2022							

REV	DATE	DESCRIPTION	BY	CHK	APP
J	13.06.2011	REVISED PERECO-11-013132	MMR	MM	

- △ PHOSPHOR BRONZE
- △ LCP, UL94V-0
- △ CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 100-1557, BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- △ REFERENCE APPLICATION SPEC 114-1302 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES
- △ APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- △ DATINGS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- △ CONTACT AREA LUBRICATED WITH BELLECORE APPROVED LUBRICANT TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995
- △ HOLE DIAMETER SHOULD BE 3.10 WHEN USING FEED THROUGH GUIDE PIN P/N 120759 CLEARANCE FOR M3x0.5 THREAD

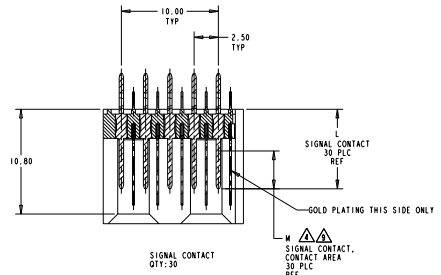

5.30	9.7	120677-2
3.90	8.2	120677-1
M	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 5/20/99

TE Connectivity

HEADER ASSEMBLY, 30 POSITION, RIGHT HAND, 8 ROW, 2 PACK, 452S

STATE: CA CASE CODE: 00779 ©=120677

CUSTOMER DRAWING