

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2006.
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
D		REVISED (ECO-111-013077)	23JUN11	JC	WK	

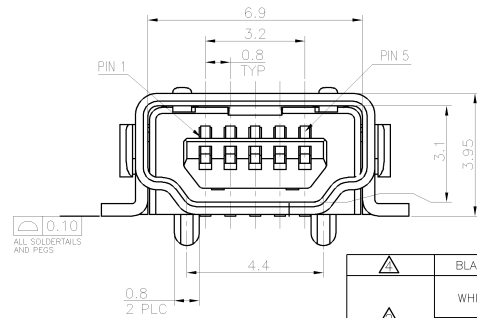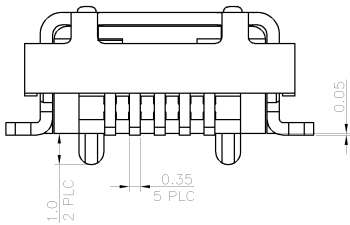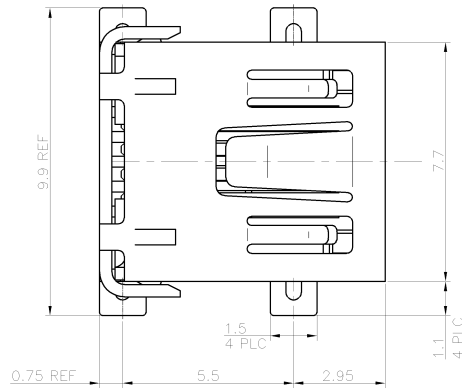

▲	BLACK	REEL	2-1734327-2
	WHITE	REEL	1-1734327-2
▲	BLACK	TRAY	1-1734327-1
		REEL	1734327-2
FINISH (SEE SHEET 2)		TRAY	1734327-1
HSG. COLOR	PACKAGE	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	F. YANG	16DEC2008	TE Connectivity	
		CHK	S. CHIEN	16DEC2008		
		APVD	W. KODAMA	16DEC2008	NAME	
DIMENSIONS:		PRODUCT SPEC			MINI USB CONNECTOR	
MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	108-57062			A SERIES, RCPT, R/A, SMT TYPE	
	0 PLC ± 0.38	QUALIFICATION TEST REPORT			SIZE CAGE CODE DRAWING NO RESTRICTED	
	1 PLC ± 0.25	501-57070			A3 00779 C-1734327	
	2 PLC ± 0.13	WEIGHT 0.76 GRAMS			SCALE SHEET 1 OF 4 REV D	
	3 PLC ± 0.05	CUSTOMER DRAWING				
	4 PLC ± -					
	ANGLES ± 3°					
MATERIAL	FINISH					
SEE SHEET 2	SEE SHEET 2					

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2006.
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
SEE SHEET 1.					

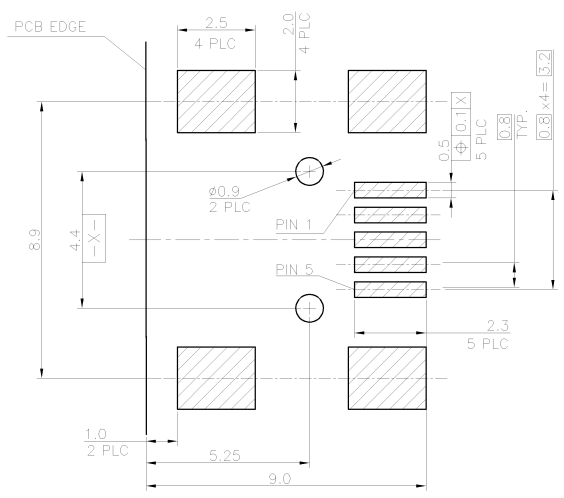

- NOTES:**
- MATERIAL:**
 HOUSING: PA9T WITH 30% GF, UL 94V-0, COLOR: SEE TABLE.
 CONTACT: PHOSPHOR BRONZE, THICKNESS: 0.25±0.05mm.
 SHELL: PHOSPHOR BRONZE, THICKNESS: 0.40±0.05mm.
 - FINISH:**
 CONTACTS: GOLD FLASH OVER
 0.76µm [30µ"] MIN. PALLADIUM-NICKEL PLATED ON CONTACT AREA,
 2.54µm [100µ"] MIN. MATTE-TIN PLATED ON OLDER TAILS:
 1.27µm [50µ"] MIN. NICKEL UNDERPLATED ALL OVER.
 SHELL: 2.032µm [80µ"] MIN. NICKEL PLATED ALL OVER.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201 CONDITION B.**
 - FINISH:**
 CONTACTS: GOLD FLASH OVER
 0.76µm [30µ"] MIN. PALLADIUM-NICKEL PLATED ON CONTACT AREA,
 3.0µm [118µ"] MIN. MATTE-TIN PLATED ON SOLDER TAILS :
 1.27µm [50µ"] MIN. NICKEL UNDERPLATED OVERALL.
 SHELL: 0.76~2.28µm [30-90µ"] MATTE TIN
 1.27µm [50µ"] MIN. NICKEL UNDERPLATED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity	
DIMENSIONS: MM		CHK		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME	
0 PLC ± -		PRODUCT SPEC	MINI USB CONNECTOR	
1 PLC ± -		APPLICATION SPEC	A SERIES, RCPT, R/A, SMT TYPE	
2 PLC ± -		WEIGHT	SIZE	CAGE CODE
3 PLC ± -		CUSTOMER DRAWING	A3	00779
4 PLC ± -			DRAWING NO	1734327
ANGLES ± -		SCALE	SHEET	REV
FINISH		2	4	D

AMP 1470-19 REV 31MAR2000

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2006.
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

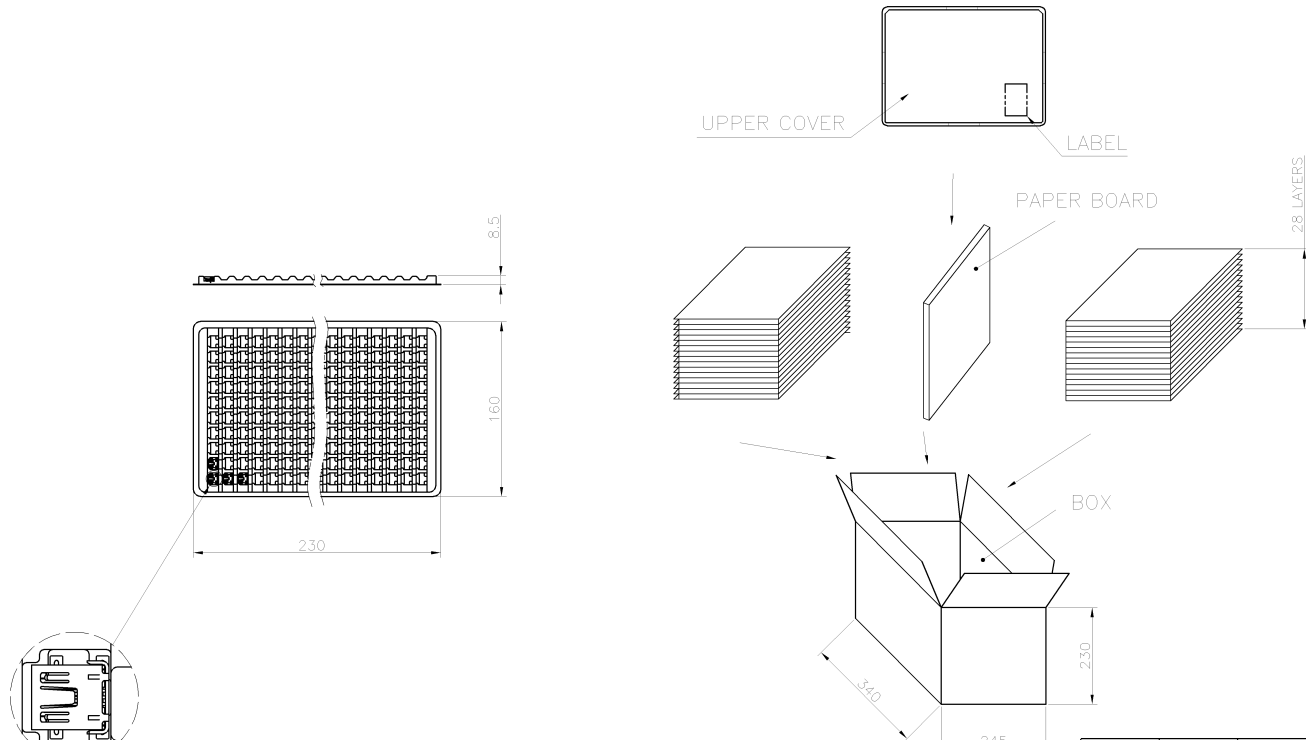

9.2	6.7	8400 (56 TRAYS)	150
G.W(KGS)	N.W(KGS)	QUANTITY/ BOX	PCS/ TRAY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity	
DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK	NAME	
		APVD	MINI USB CONNECTOR A SERIES, RCPT, R/A, SMT TYPE	
MATERIAL	FINISH	PRODUCT SPEC	SIZE	CAGE CODE
		APPLICATION SPEC	A3	00779
		WEIGHT	DRAWING NO	DRAWING NO
		CUSTOMER DRAWING	©-1734327	RESTRICTED
			SCALE	SHEET 3 of 4
				REV D

4



3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2006.
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
SEE SHEET 1.					

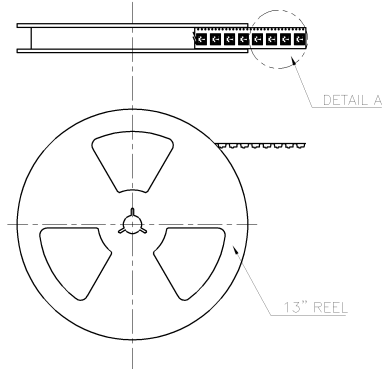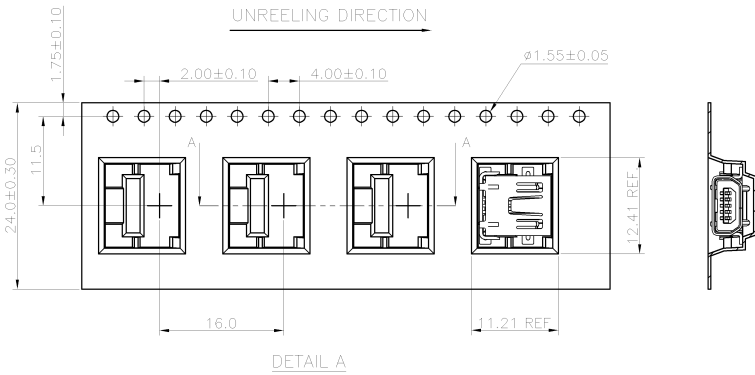

- NOTES:
 1. APPLICABLE DOCUMENT: EIA-481-2
 2. PACKAGE: 700 PCS/REEL, 5 REELS/BOX
 W.G.: 6.5Kg, N.G.: 5.5Kg
 3. QUANTITY: 3500 PCS.

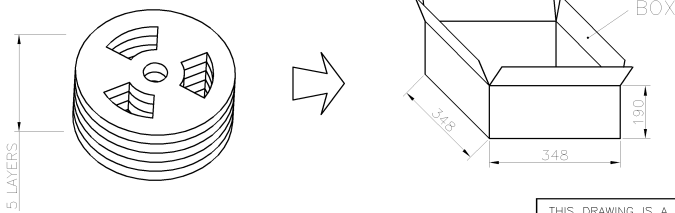

6.5	5.5	3500	700
G.W(KGS)	N.W(KGS)	QUANTITY/ BOX	PCS/ REEL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity	
DIMENSIONS: MM		CHK	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	MINI USB CONNECTOR A SERIES, RCPT, R/A, SMT TYPE	
0 PLC ± -		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO	
1 PLC ± -		APPLICATION SPEC	A3 00779 C-1734327	
2 PLC ± -		WEIGHT	RESTRICTED	
3 PLC ± -		CUSTOMER DRAWING	SCALE SHEET 4 of 4 REV D	
4 PLC ± -				
ANGLES ± -				
FINISH				