

4






3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	AP/VD
	G	REVISED (ECR-11-006592)	07APR11	JC	WK

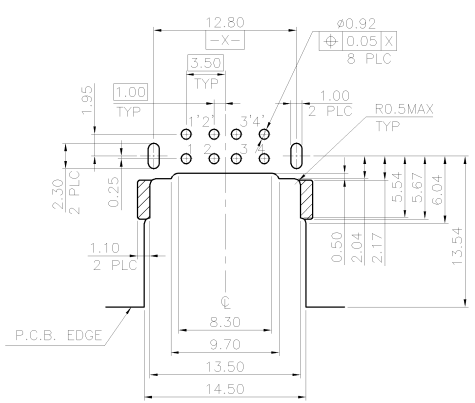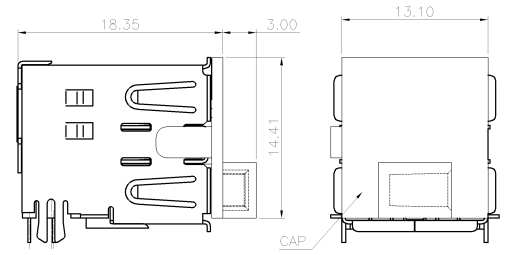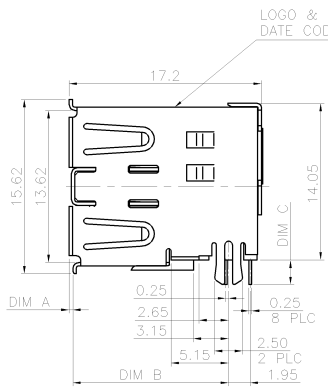

- NOTES:
- MATERIAL:
 HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CAP: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CONTACT: PHOSPHOR BRONZE.
 FRONT SHIELD: BRASS.
 REAR SHIELD: SPCC.
 GROUNDING STRIP: BRASS.
 - FINISH:
 CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.
 3.048μm [120μ"] MIN. MATTE TIN PLATING ON SOLDER TAILS,
 WITH ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL.
 FRONT SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.
 0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
 REAR SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.
 0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
 GROUNDING STRIP: 0.762μm [30μ"] MIN. NICKEL PLATING.
 0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

1.90	14.30	0	W/	TAPE & REEL	1734062-3	
2.20	13.95	0.35	W/O	TUBE	1734062-2	OBSOLETE
				TAPE & REEL	1734062-1	

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2~1.4mm)
 (COMPONENT SIDE) TOLERANCE ±0.05mm

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN F. YANG 10SEP2009	 TE Connectivity	
DIMENSIONS: MM		CHK S. CHIEN 10SEP2009		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD W. KODAMA 10SEP2009	NAME	
0 PLC ± - 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 3°		PRODUCT SPEC 108-57481 QUALIFICATION TEST REPORT 501-57557		RESTRICTED
MATERIAL		WEIGHT 4.71 GRAMS		SIZE A3
SEE NOTE		CUSTOMER DRAWING		CAGE CODE 00779
		DRAWING NO 1734062		SCALE -
		SHEET 1 of 24		REV G

4






3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

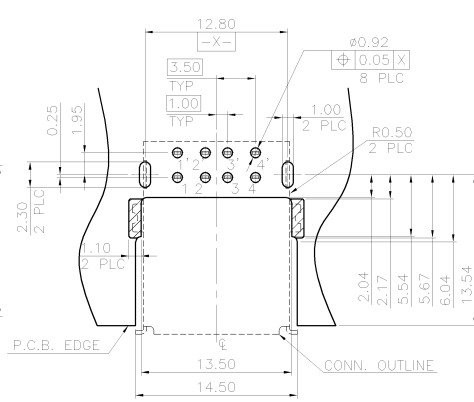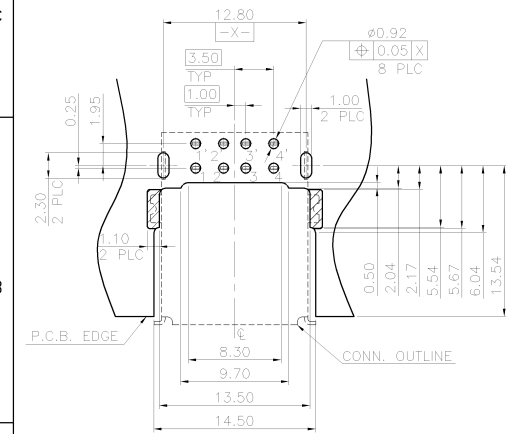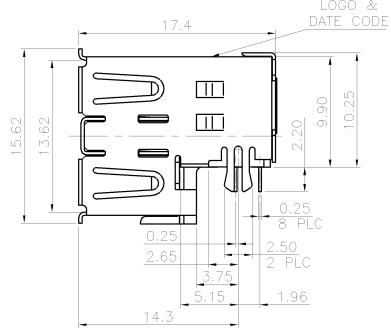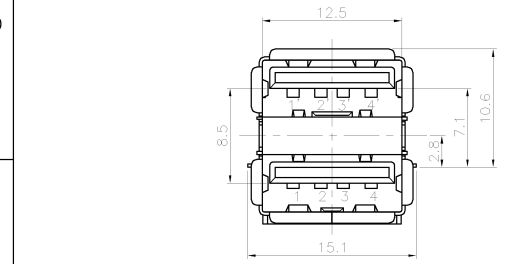

NOTE:
 1. MATERIAL:
 HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CONTACT: PHOSPHOR BRONZE.
 FRONT SHIELD: BRASS.
 REAR SHIELD: SPCC.
 GROUNDING STRIP: BRASS.
 2. FINISH:
 CONTACT: 0.762µm [30µ"] MIN. GOLD PLATING ON CONTACT AREA.
 3.048µm [120µ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
 WITH ENTIRE CONTACT UNDERPLATED 1.27µm [50µ"] MIN. NICKEL.
 FRONT SHIELD: 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
 REAR SHIELD: 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
 GROUNDING STRIP: 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
 3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2~1.4mm)
 (COMPONENT SIDE) TOLERANCE ±0.05mm

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2~1.4mm)
 (COMPONENT SIDE) TOLERANCE ±0.05mm

OBSOLETED	TUBE	1-1734062-2
	TAPE & REEL	1-1734062-1
NOTE	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		
DIMENSIONS: MM		CHK		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME	
0 PLC	±	PRODUCT SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE	
1 PLC	±0.35	QUALIFICATION TEST REPORT	SIZE CAGE CODE DRAWING NO	
2 PLC	±0.25		A3 00779 C-1734062	
3 PLC	±		RESTRICTED	
4 PLC	±		WEIGHT 4.71 GRAMS	
ANGLES	± 3°		CUSTOMER DRAWING	
MATERIAL SEE NOTE	FINISH SEE NOTE		SCALE SHEET 2 OF 24 REV G	

4


3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.




LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
SEE SHEET 1.					



- NOTE:
- MATERIAL:
 HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CONTACT: PHOSPHOR BRONZE.
 FRONT SHIELD: BRASS.
 REAR SHIELD: SPCC.
 GROUNDING STRIP: BRASS.
 - FINISH:
 CONTACT: 0.76 μ m [30 μ] MIN. GOLD PLATING ON CONTACT AREA.
 3.048 μ m [120 μ] MIN. BRIGHT TIN PLATING ON SOLDER TAIL,
 WITH ENTIRE CONTACT UNDERPLATED 1.27 μ m [50 μ] MIN. NICKEL.
 FRONT SHIELD: 0.76 μ m [30 μ] MIN. NICKEL PLATING.
 REAR SHIELD: 0.762 μ m [30 μ] MIN. Cu UNDER PLATING OVERALL.
 0.762 μ m [30 μ] MIN. NICKEL PLATING.
 GROUNDING STRIP: 0.762 μ m [30 μ] MIN. Cu UNDER PLATING OVERALL.
 0.762 μ m [30 μ] MIN. NICKEL PLATING.
 3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

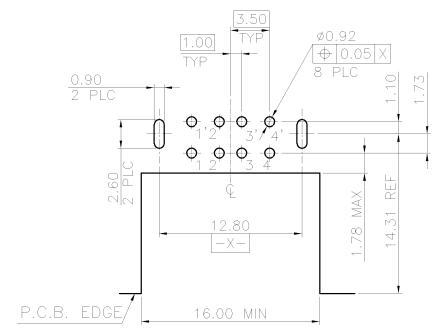

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2mm)
 (COMPONENT SIDE) TOLERANCE \pm 0.05mm



TRAY	2-1734062-2
TUBE	2-1734062-1
PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity	
DIMENSIONS: MM		CHK		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC \pm - 1 PLC \pm 0.35 2 PLC \pm 0.25 3 PLC \pm - 4 PLC \pm - ANGLES \pm 3°		APVD	NAME	
MATERIAL SEE NOTE		FINISH SEE NOTE	PRODUCT SPEC QUALIFICATION TEST REPORT	
WEIGHT 4.71 GRAMS CUSTOMER DRAWING		SIZE A3 CAGE CODE 00779 DRAWING NO. C-1734062	RESTRICTED	
		SCALE	SHEET 3 of 24	REV G

4




3

2



1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
SEE SHEET 1.					



NOTES:
 1. MATERIAL:
 HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CONTACT: PHOSPHOR BRONZE.
 FRONT SHIELD: BRASS.
 REAR SHIELD: SPCC.
 GROUNDING STRIP: STAINLESS.
 FINISH:
 CONTACT: 0.762µm [30µ"] MIN. GOLD PLATING ON CONTACT AREA.
 3.048µm [120µ"] MIN. MATTE TIN PLATING ON SOLDER TAILS.
 1.27µm [50µ"] MIN. NICKEL UNDERPLATED WITH ENTIRE CONTACT.
 FRONT SHIELD: 0.762µm [30µ"] MIN. NICKEL PLATING.
 REAR SHIELD: 0.762µm [30µ"] MIN. NICKEL PLATING OVERALL.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
 GROUNDING STRIP: SPUTTERING/BLACK PLATING IN FRONT SURFACE.
 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
 4. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC T09-201, CONDITION B.

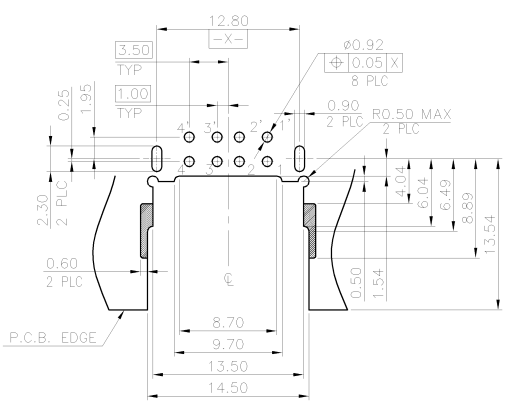

RECOMMENDED MOUNT DIMENSION

RECOMMEND P.C.B LAYOUT (THICKNESS 1.4~1.6mm)
 (COMPONENT SIDE) TOLERANCE ±0.05mm

TAPE & REEL	3-1734062-4
TAPE & REEL	3-1734062-3
TUBE	3-1734062-2
TRAY	3-1734062-1
FINISH	PACKAGE PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE														
DIMENSIONS: MM		CHK			NAME												
<table border="1"> <tr> <th>TOLERANCES UNLESS OTHERWISE SPECIFIED:</th> <th></th> </tr> <tr> <td>0 PLC</td> <td>± .</td> </tr> <tr> <td>1 PLC</td> <td>± 0.35</td> </tr> <tr> <td>2 PLC</td> <td>± 0.25</td> </tr> <tr> <td>3 PLC</td> <td>± .</td> </tr> <tr> <td>4 PLC</td> <td>± .</td> </tr> <tr> <td>ANGLES</td> <td>± 3°</td> </tr> </table>		TOLERANCES UNLESS OTHERWISE SPECIFIED:		0 PLC	± .	1 PLC	± 0.35	2 PLC	± 0.25	3 PLC	± .	4 PLC	± .	ANGLES	± 3°	APVD	PRODUCT SPEC
TOLERANCES UNLESS OTHERWISE SPECIFIED:																	
0 PLC	± .																
1 PLC	± 0.35																
2 PLC	± 0.25																
3 PLC	± .																
4 PLC	± .																
ANGLES	± 3°																
MATERIAL		QUALIFICATION TEST REPORT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED											
SEE NOTE		FINISH	SEE NOTE	WEIGHT	4.71 GRAMS	A3 00779 ©-1734062											
		CUSTOMER DRAWING	SCALE	SHEET	4 of 24	REV G											

4






3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.					

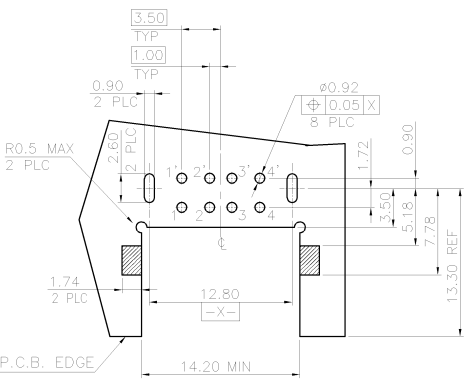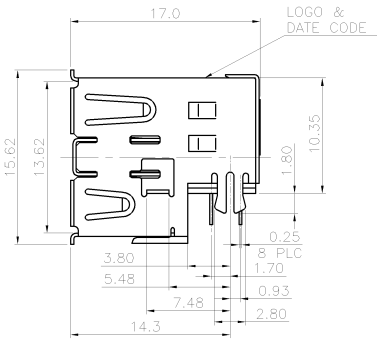

RECOMMENDED MOUNT DIMENSION

- NOTES:
- MATERIAL:
 HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CONTACT: PHOSPHOR BRONZE.
 FRONT SHIELD: BRASS.
 REAR SHIELD: SPCC.
 GROUNDING STRIP: BRASS.
 - FINISH:
 CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.
 3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
 WITH ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL.
 FRONT SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.
 0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
 REAR SHIELD: 0.762μm [30μ"] MIN. NICKEL PLATING.
 0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
 GROUNDING STRIP: 0.762μm [30μ"] MIN. NICKEL PLATING.
 0.762μm [30μ"] MIN. Cu UNDER PLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

RECOMMEND P.C.B LAYOUT (THICKNESS 1.0~1.4mm)
 (COMPONENT SIDE) TOLERANCE ±0.05mm

TUBE	4-1734062-1
PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity	
		CHK		
DIMENSIONS:		APVD	NAME	
MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE	
	0 PLC ± - 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 3°	QUALIFICATION TEST REPORT	RESTRICTED	
MATERIAL	FINISH	WEIGHT	SIZE	CAGE CODE
SEE NOTE	SEE NOTE	4.71 GRAMS	A3	00779
		CUSTOMER DRAWING	DRAWING NO	©-1734062
		SCALE	SHEET	REV
			5 of 24	G

4






3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 COPYRIGHT © BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
SEE SHEET 1.					

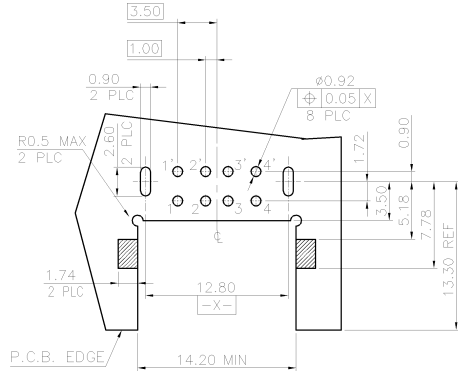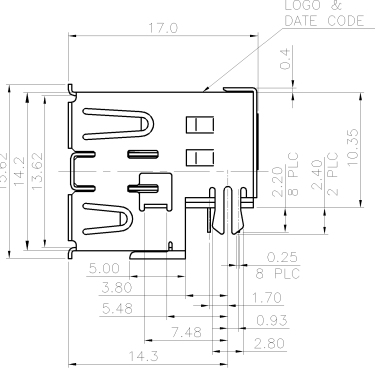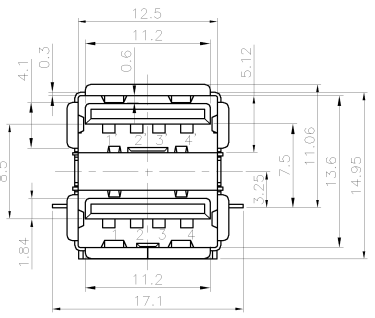

- NOTES:
- MATERIAL:
 HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CONTACT: PHOSPHOR BRONZE.
 FRONT SHIELD: SUS.
 REAR SHIELD: SPCC.
 GROUNDING STRIP: SUS.
 - FINISH:
 CONTACT: 0.762µm [30µ"] MIN. GOLD PLATING ON CONTACT AREA, 3.048µm [120µ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS, WITH ENTREC CONTACT UNDERPLATED 1.27µm [50µ"] MIN. NICKEL.
 FRONT SHIELD: 0.762µm [30µ"] MIN. NICKEL PLATING OVERALL.
 REAR SHIELD: 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

TAPE & REEL	4-1734062-2
PACKAGE	PART NUMBER

RECOMMEND P.C.B LAYOUT (THICKNESS 1.6mm)
 (COMPONENT SIDE) TOLERANCE ±0.05mm

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity	
DIMENSIONS: MM		CHK		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 3°		APVD	NAME	
MATERIAL SEE NOTE		FINISH SEE NOTE	PRODUCT SPEC QUALIFICATION TEST REPORT	
WEIGHT 4.71 GRAMS CUSTOMER DRAWING		SIZE A3 CAGE CODE 00779 DRAWING NO C-1734062	RESTRICTED SCALE - SHEET 6 OF 24 REV G	

4



3

2

1






THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
SEE SHEET 1.					

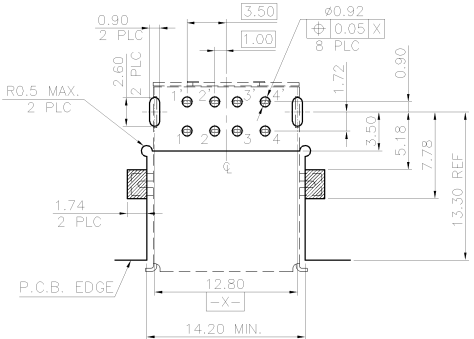

- NOTES:
- MATERIAL:
 HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CONTACT: PHOSPHOR BRONZE.
 FRONT SHIELD: SUS.
 REAR SHIELD: SPCC.
 GROUNDING STRIP: SUS.
 - FINISH:
 CONTACT: 0.762µm [30µ"] MIN. GOLD PLATING ON CONTACT AREA, 2.540µm [100µ"] MIN. BRIGHT TIN PLATING ON SOLDERTAILS, WITH ENTIRE CONTACT UNDERPLATED 1.27µm [50µ"] MIN. NICKEL.
 FRONT SHIELD: 0.762µm [30µ"] MIN. NICKEL PLATING OVERALL.
 REAR SHIELD: 0.762µm [30µ"] MIN. NICKEL PLATING, 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

RECOMMEND P.C.B LAYOUT (THICKNESS 1.6mm)
 (COMPONENT SIDE) TOLERANCE ±0.05mm

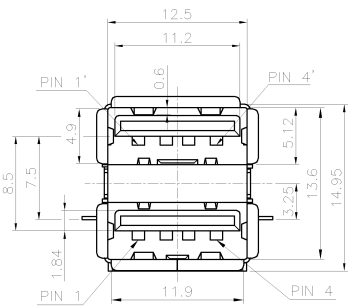

TAPE & REEL	4-1734062-3
PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity															
DIMENSIONS: MM		CHK																
<table border="1"> <thead> <tr> <th>TOLERANCES UNLESS OTHERWISE SPECIFIED:</th> <th></th> </tr> </thead> <tbody> <tr><td>0 PLC</td><td>± .</td></tr> <tr><td>1 PLC</td><td>± 0.35</td></tr> <tr><td>2 PLC</td><td>± 0.25</td></tr> <tr><td>3 PLC</td><td>± .</td></tr> <tr><td>4 PLC</td><td>± .</td></tr> <tr><td>ANGLES</td><td>± 3°</td></tr> </tbody> </table>		TOLERANCES UNLESS OTHERWISE SPECIFIED:		0 PLC	± .	1 PLC	± 0.35	2 PLC	± 0.25	3 PLC	± .	4 PLC	± .	ANGLES	± 3°	APVD	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:																		
0 PLC	± .																	
1 PLC	± 0.35																	
2 PLC	± 0.25																	
3 PLC	± .																	
4 PLC	± .																	
ANGLES	± 3°																	
MATERIAL		PRODUCT SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE															
SEE NOTE		QUALIFICATION TEST REPORT	RESTRICTED															
FINISH		WEIGHT	SIZE	CAGE CODE														
SEE NOTE		4.25 GRAMS	A3	00779														
		CUSTOMER DRAWING	DRAWING NO															
			C-1734062															
		SCALE	SHEET	REV														
			7 of 24	G														

4





3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
SEE SHEET 1.					

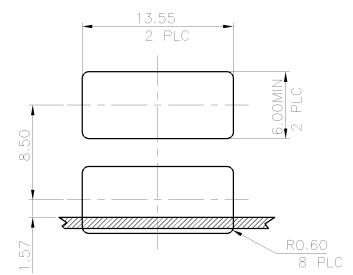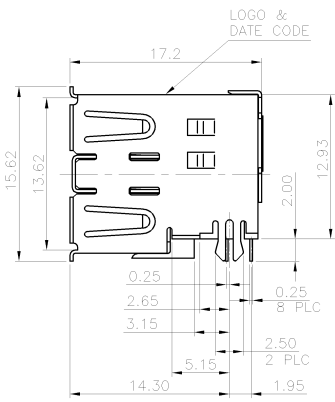

MOUNTING PANEL CUTOUT
(INTERNAL SIDE)

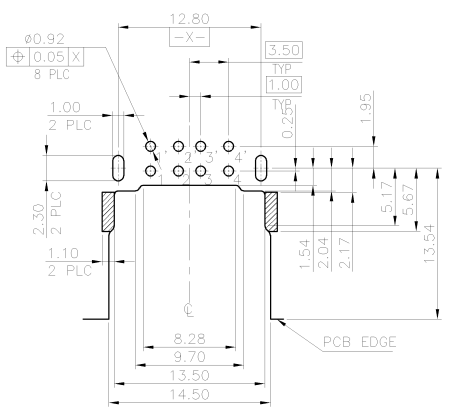

RECOMMEND P.C.B LAYOUT (THICKNESS 1.0mm)
(COMPONENT SIDE) TOLERANCE ±0.05mm

NOTES:

- MATERIAL:
 HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CONTACT: PHOSPHOR BRONZE.
 FRONT SHIELD: BRASS.
 REAR SHIELD: SPCC.
 GROUNDING STRIP: BRASS.
- FINISH:
 CONTACT: 0.762µm [30µ"] MIN. GOLD PLATING ON CONTACT AREA.
 3.048µm [120µ"] MIN. BRIGHT-TIN PLATING ON SOLDERTAILS.
 WITH ENTIRE CONTACT UNDERPLATED 1.27µm [50µ"] MIN. NICKEL.
 FRONT SHIELD: 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
 REAR SHIELD: 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
 GROUNDING STRIP: 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
- REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

OBSOLETE	TRAY	5-1734062-2
OBSOLETE	TAPE & REEL	5-1734062-1
	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity	
		CHK		
DIMENSIONS:		APVD	NAME	
MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE	
	0 PLC ± - 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 3°	QUALIFICATION TEST REPORT	RESTRICTED	
MATERIAL	FINISH	WEIGHT	SIZE	CAGE CODE
SEE NOTE	SEE NOTE	4.71 GRAMS	A3	00779
		CUSTOMER DRAWING	DRAWING NO	DRAWING NO
			C-1734062	
		SCALE	SHEET	REV
			8 of 24	G

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
SEE SHEET 1.					

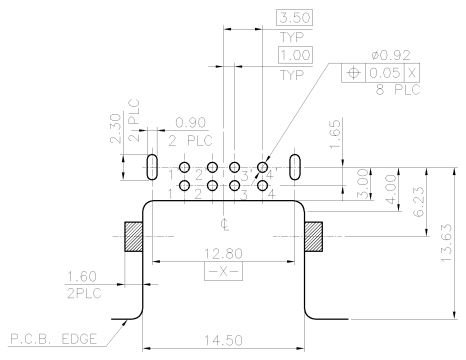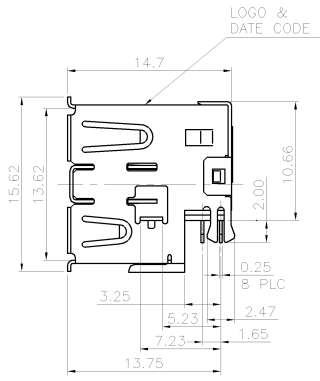

NOTES:
 1. MATERIAL:
 HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 SPACER: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CONTACT: PHOSPHOR BRONZE.
 FRONT SHELL: BRASS.
 REAR SHELL: SPCC.
 GROUNDING STRIP: STAINLESS.
 2. FINISH:
 CONTACT: 0.762µm [30µ"] MIN. GOLD PLATING ON CONTACT AREA.
 3.048µm [120µ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS,
 WITH ENTIRE CONTACT UNDERPLATED 1.27µm [50µ"] MIN. NICKEL.
 FRONT SHELL: 0.762µm [30µ"] MIN. NICKEL PLATED.
 0.762µm [30µ"] MIN. Cu UNDERPLATING OVERALL.
 REAR SHELL: 0.762µm [30µ"] MIN. NICKEL PLATED.
 0.762µm [30µ"] MIN. Cu UNDERPLATING OVERALL.
 GROUNDING SHELL: 0.762µm [30µ"] MIN. NICKEL PLATED.
 0.762µm [30µ"] MIN. Cu UNDERPLATING OVERALL.
 3. REFLOW SOLDER CAPABLE TO 260°C PER TE
 SPEC 109-201, CONDITION B.

TAPE & REEL	6-1734062-1
PACKAGE	PART NUMBER

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2mm)
 (COMPONENT SIDE) TOLERANCE ±0.05mm

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity	
DIMENSIONS: MM		CHK		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 3°		APVD	PRODUCT SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE
MATERIAL		QUALIFICATION TEST REPORT	SIZE	CAGE CODE
SEE NOTE		FINISH	SEE NOTE	DRAWING NO
		WEIGHT	4.71 GRAMS	A300779
		CUSTOMER DRAWING	©-1734062	RESTRICTED
		SCALE	SHEET	9 of 24
			REV	G

4


3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - - -
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
DW						
SEE SHEET 1.						






NOTES:

- 1. MATERIAL:
 HOUSING: PA9T WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CONTACT: PHOSPHOR BRONZE.
 FRONT SHIELD: BRASS.
 REAR SHIELD: SPCC.
 GROUNDING STRIP: BRASS.
- 2. FINISH:
 CONTACT: 0.762µm [30µ"] MIN. GOLD PLATING ON CONTACT AREA.
 3.048µm [120µ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
 WITH ENTIRE CONTACT UNDERPLATED 1.27µm [50µ"] MIN. NICKEL.
 FRONT SHELL: 0.762µm [30µ"] MIN. NICKEL PLATED.
 0.762µm [30µ"] MIN. Cu UNDERPLATING OVERALL.
 REAR SHELL: 0.762µm [30µ"] MIN. NICKEL PLATED.
 0.762µm [30µ"] MIN. Cu UNDERPLATING OVERALL.
 GROUNDING STRIP: 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
- 3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

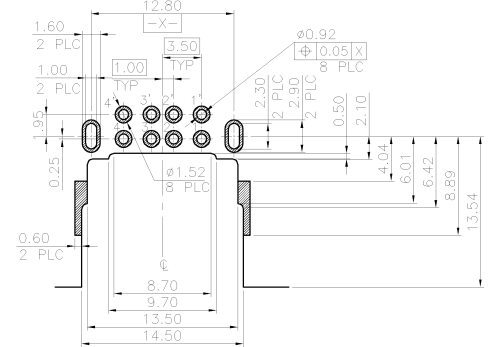

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2mm)
 (COMPONENT SIDE) TOLERANCE±0.05mm



TAPE & REEL	7-1734062-1
PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
		CHK				
		APVD				
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	NAME			
MM		QUALIFICATION TEST REPORT	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE			
	0 PLC ± - 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 3°	WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED
MATERIAL	FINISH	4.3 GRAMS	A3	00779	C-1734062	
SEE NOTE	SEE NOTE	CUSTOMER DRAWING	SCALE	SHEET	10 of 24	REV
						G

4


3

2




1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
SEE SHEET 1.						

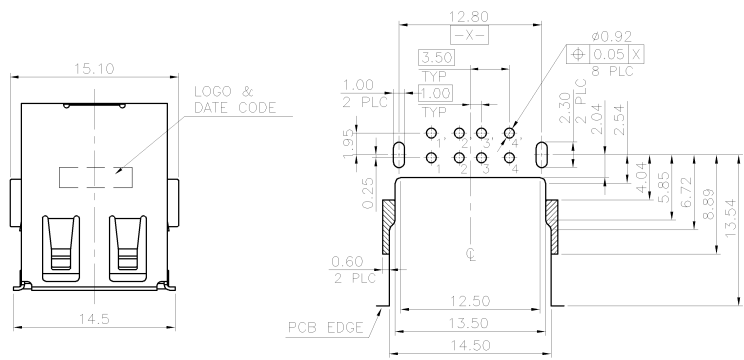

NOTE:
 1. MATERIAL:
 HOUSING: PART WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 SPACER: PART WITH 30% GF, UL 94V-0 RATED, BLACK COLOR.
 CONTACT: PHOSPHOR BRONZE.
 FRONT SHIELD: BRASS.
 GROUNDING STRIP: BRASS.
 2. FINISH:
 CONTACT: 0.762µm [30µ"] MIN. GOLD PLATING ON CONTACT AREA.
 3.048µm [120µ"] MIN. BRIGHT TIN PLATING ON SOLDER TAIL,
 WITH ENTIRE CONTACT UNDERPLATED 1.27µm [50µ"] MIN. NICKEL.
 FRONT SHELL: 0.762µm [30µ"] MIN. NICKEL PLATED.
 0.762µm [30µ"] MIN. Cu UNDERPLATING OVERALL.
 GROUNDING STRIP: 0.762µm [30µ"] MIN. NICKEL PLATING.
 0.762µm [30µ"] MIN. Cu UNDER PLATING OVERALL.
 3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.



TAPE & REEL	8-1734062-1
PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
DIMENSIONS: MM		CHK				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME			
0 PLC ± - 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 3°		PRODUCT SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE			
MATERIAL: SEE NOTE		QUALIFICATION TEST REPORT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED
FINISH: SEE NOTE		WEIGHT	A3	00779	1734062	
		CUSTOMER DRAWING	SCALE	SHEET	11 of 24	REV G

4









3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
SEE SHEET 1.						

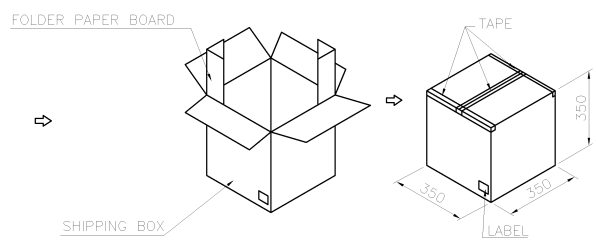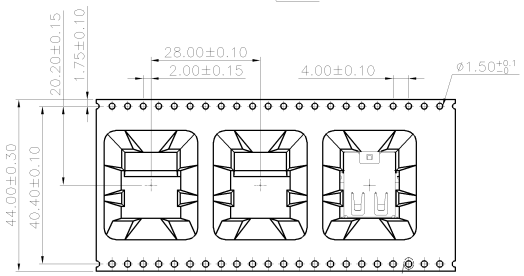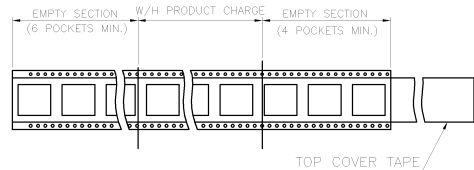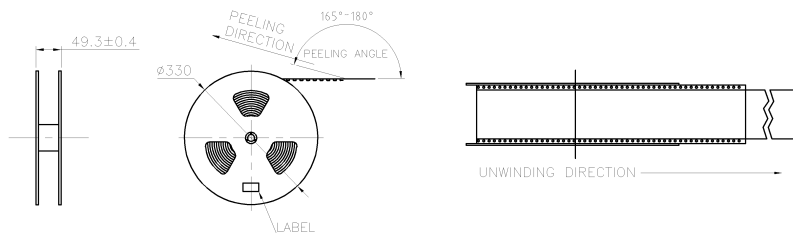

140	7	980	8.60	4.62	1-1734062-1
PCS/REEL	REELS/BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER
					1734062-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE			
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK				NAME
MM	0 PLC ± -	APVD				PRODUCT SPEC
	1 PLC ± -	APPLICATION SPEC				WEIGHT
MATERIAL	FINISH	SCALE	SIZE	CAGE CODE	DRAWING NO	RESTRICTED
		CUSTOMER DRAWING	A3	00779	1734062	
		SCALE	SHEET 12 of 24		REV G	

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

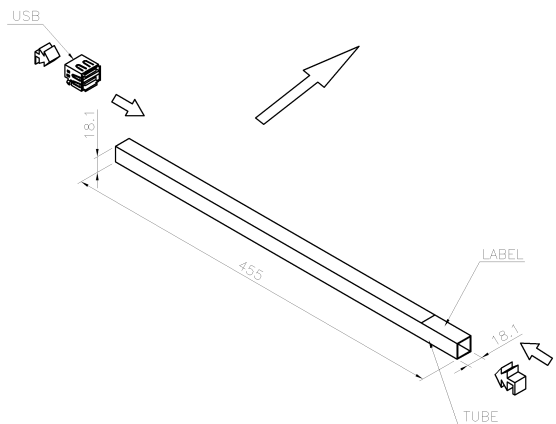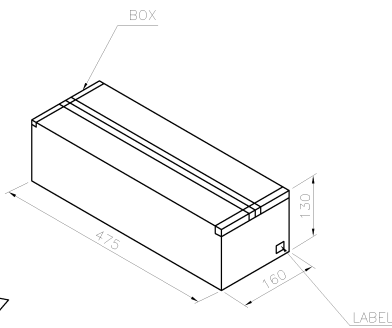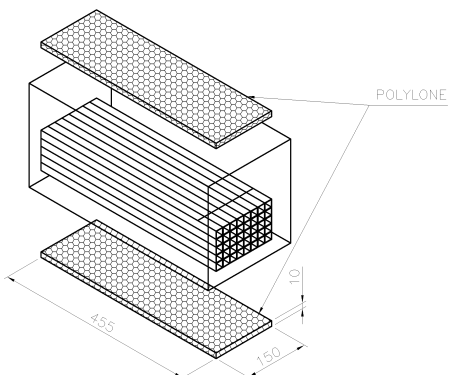

24	40	960	6.10	4.52	3-1734062-2
					1-1734062-2
					1734062-2
PCS/TUBE	TUBS/INNER BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	CHK	TE Connectivity	
APVD	NAME	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE	
PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
APPLICATION SPEC	A3	00779	C-1734062
WEIGHT	CUSTOMER DRAWING		RESTRICTED

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
MM	
0 PLC	± .1
1 PLC	± .1
2 PLC	± .1
3 PLC	± .1
4 PLC	± .1
ANGLES	± .1
MATERIAL	FINISH

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
SEE SHEET 1.						

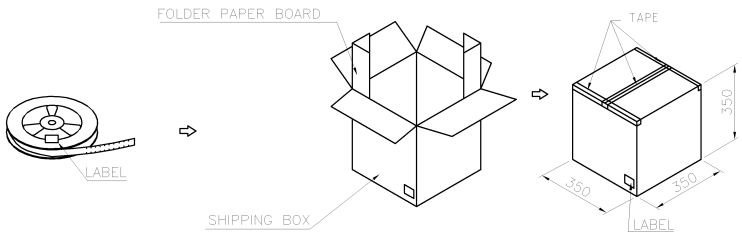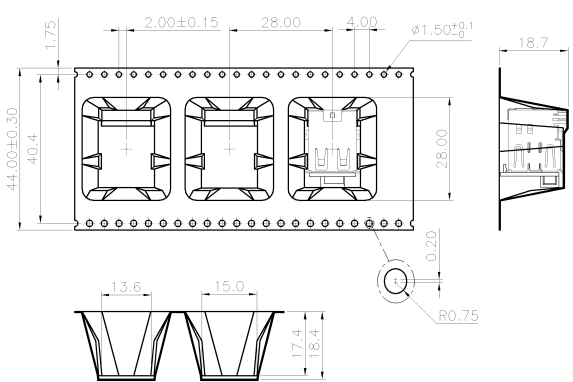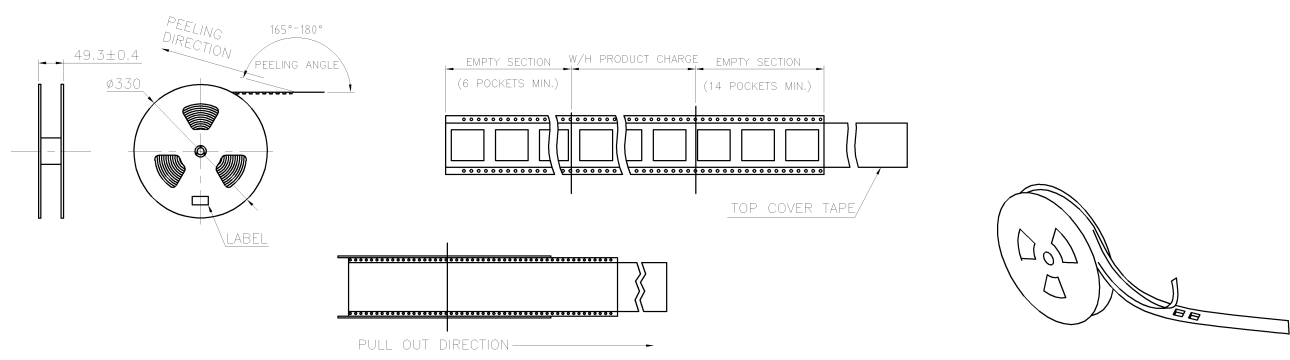

PCS/REEL	REELS/BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER
100	7	700	7.28	3.30	1734062-3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN			
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE		
MATERIAL		PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
FINISH		APPLICATION SPEC	A3	00779	1734062
		WEIGHT	RESTRICTED		
		CUSTOMER DRAWING	SCALE	SHEET	REV
				14 of 24	G

AMP 1470-19 REV 31MAR2000

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
SEE SHEET 1.					

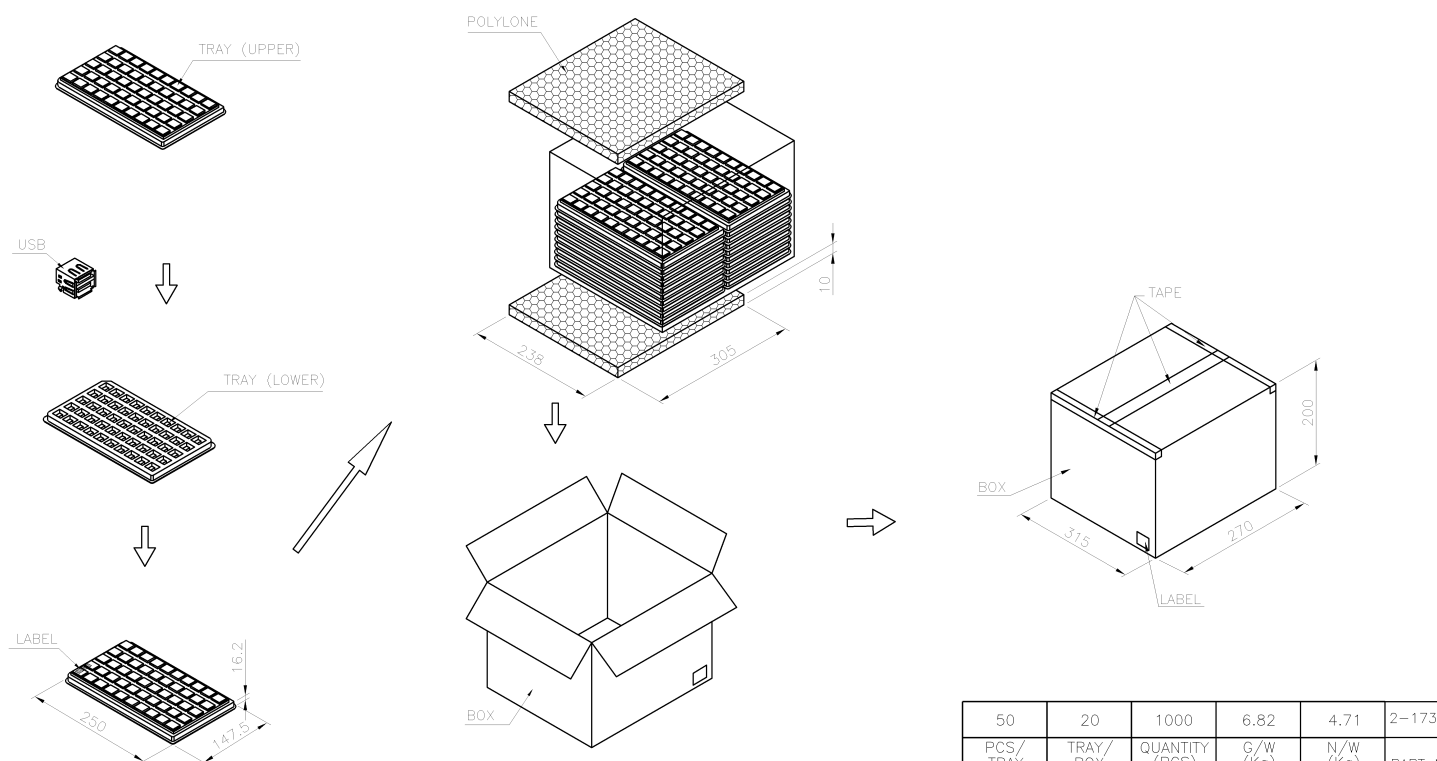

50	20	1000	6.82	4.71	2-1734062-2
PCS/ TRAY	TRAY/ BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	CHK	 TE Connectivity USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE
	0 PLC ± -	APVD	NAME	
	1 PLC ± -	PRODUCT SPEC	SIZE CAGE CODE DRAWING NO	
	2 PLC ± -	APPLICATION SPEC	RESTRICTED	
MATERIAL	FINISH	WEIGHT	SCALE	A3 00779 ©-1734062 CUSTOMER DRAWING SHEET 15 of 24 REV G

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

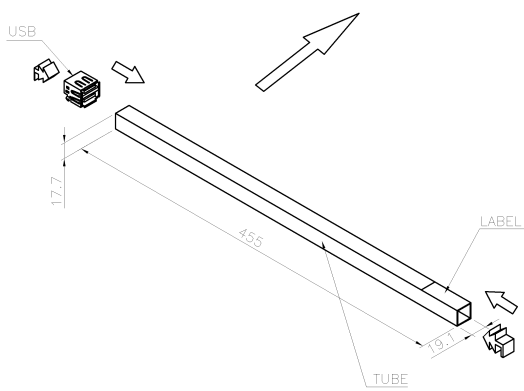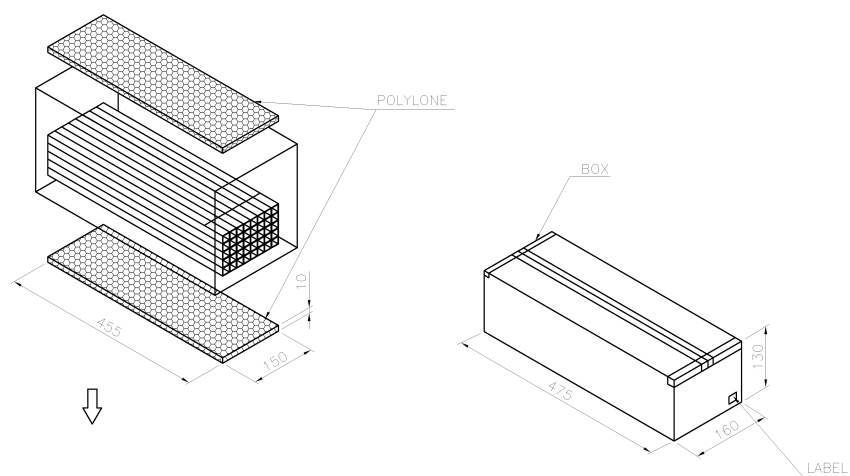

25	40	1000	6.27	4.71	4-1734062-1
PCS/ TUBE	TUBS INNER BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER
					2-1734062-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE TE Connectivity		
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE		
0 PLC ± -		PRODUCT SPEC	SIZE		RESTRICTED
1 PLC ± -		APPLICATION SPEC	CAGE CODE		
2 PLC ± -		WEIGHT	DRAWING NO		
3 PLC ± -			A3 00779		
4 PLC ± -			C-1734062		
ANGLES ± -			CUSTOMER DRAWING		
MATERIAL			SCALE		
FINISH			SHEET 16 of 24		REV G

4









3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
DW	-	SEE SHEET 1.				

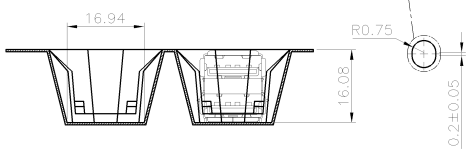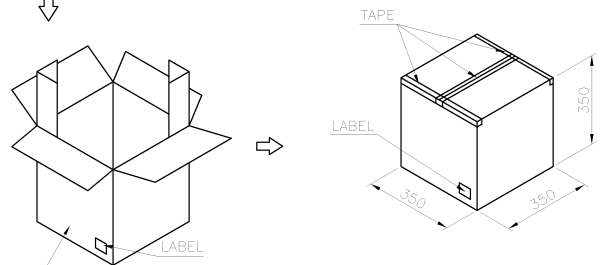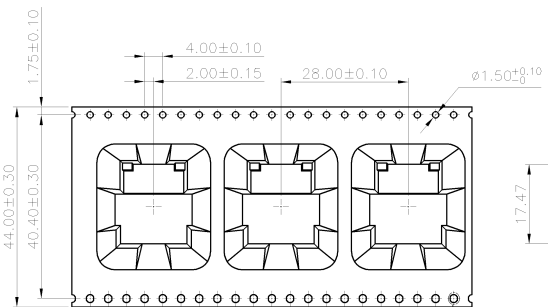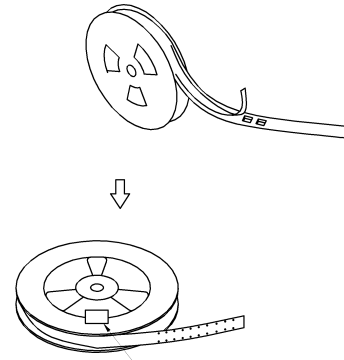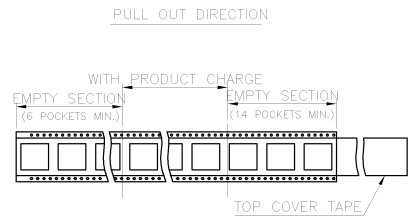

120	7	840	9.05	3.96	3-1734062-4
PCS/REEL	REELS/BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER
					3-1734062-3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	
DIMENSIONS: MM		CHK	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	
0 PLC	±	PRODUCT SPEC	
1 PLC	±	APPLICATION SPEC	
2 PLC	±	WEIGHT	
3 PLC	±		
4 PLC	±		
ANGLES	±		
MATERIAL	FINISH		

STE TE Connectivity

NAME

USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE

RESTRICTED

SIZE: A3 CAGE CODE: 00779 DRAWING NO: 1734062

CUSTOMER DRAWING

SCALE: SHEET 17 of 24 REV G

AMP 1470-19 REV 31MAR2000

4

3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
		SEE SHEET 1.				

D
C
B
A

D
C
B
A

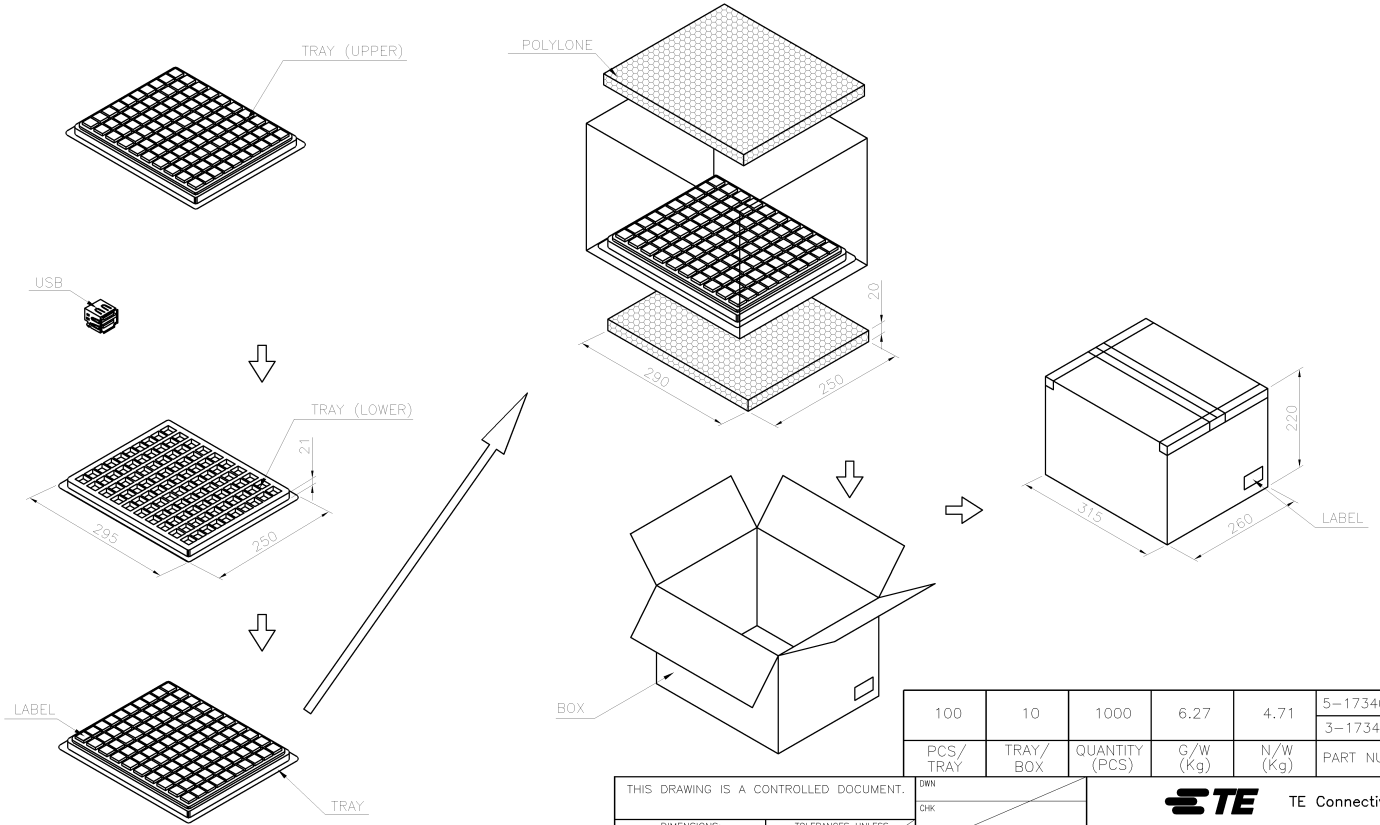

100	10	1000	6.27	4.71	5-1734062-2	OBSOLETE
PCS/ TRAY	TRAY/ BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	3-1734062-1	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	CHK	TE Connectivity
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	APVD	NAME	
MATERIAL	FINISH	PRODUCT SPEC	APPLICATION SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE
		WEIGHT	RESTRICTED	SIZE CAGE CODE DRAWING NO A3 00779 C-1734062
CUSTOMER DRAWING			SCALE	SHEET 18 of 24 REV G

4







3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.					

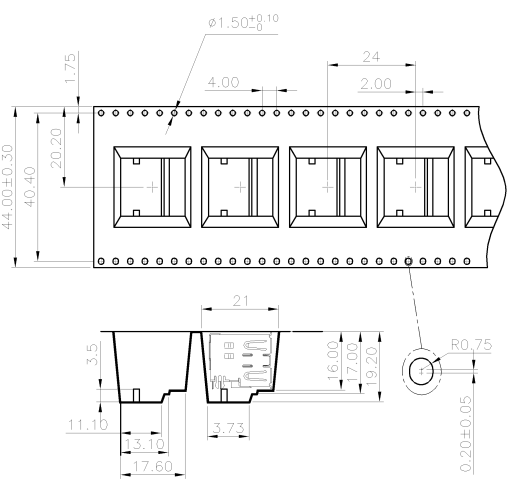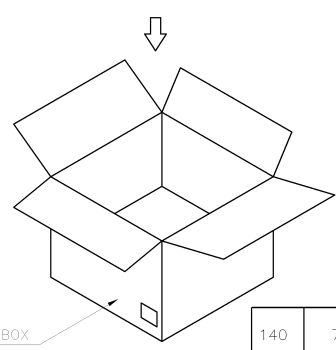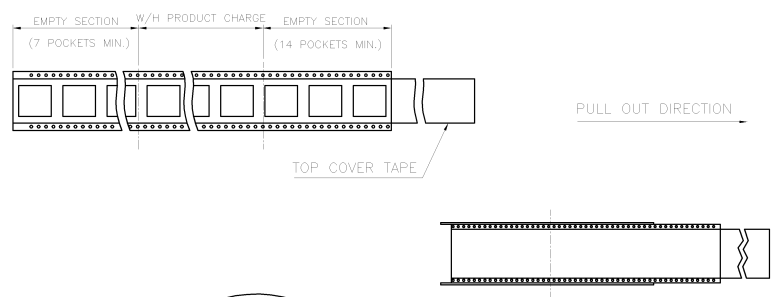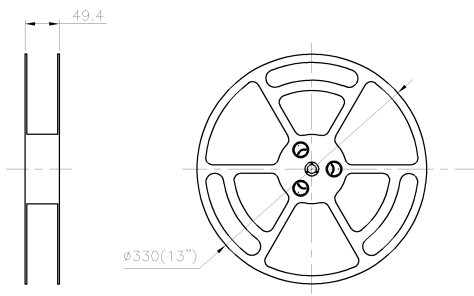

140	7	980	8.60	4.62	5-1734062-1	OBSOLETE
PCS/REEL	REELS/BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	CHK	TE Connectivity	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD	NAME	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE	
MATERIAL	FINISH	PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
		APPLICATION SPEC	A3	00779	1734062
		WEIGHT	CUSTOMER DRAWING		RESTRICTED
			SCALE	SHEET	REV
				19 of 24	G

4







3

2




1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
SEE SHEET 1.						

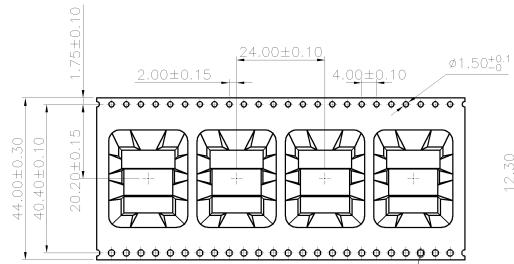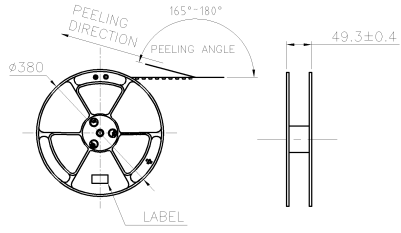

FOLDER PAPER BOARD



11.20 Kg	6.10 Kg	200	7	1400 PCS	4-1734062-2
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS/CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN
DIMENSIONS: MM		CHK
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD
0 PLC	± -	PRODUCT SPEC
1 PLC	± -	APPLICATION SPEC
2 PLC	± -	WEIGHT
3 PLC	± -	CUSTOMER DRAWING
4 PLC	± -	
ANGLES	± -	
MATERIAL	FINISH	

STE TE Connectivity

NAME: USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE

RESTRICTED

SIZE: A3 CAGE CODE: 00779 DRAWING NO: 1734062

SCALE: SHEET 20 of 24 REV G

4







3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
SEE SHEET 1.					

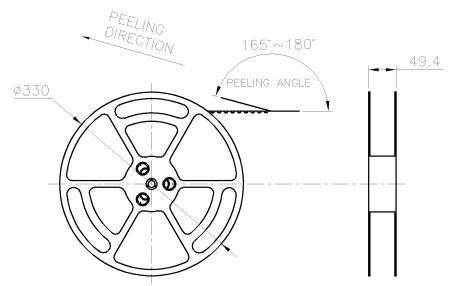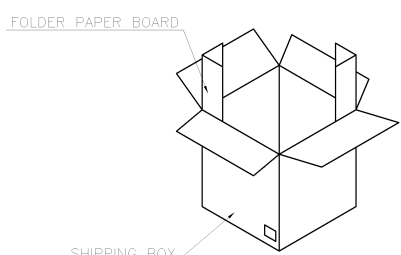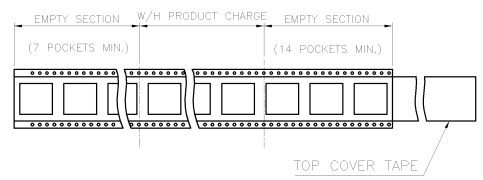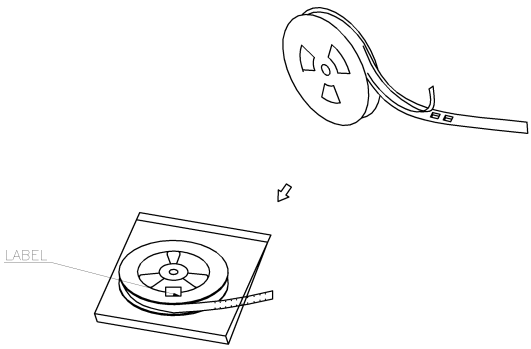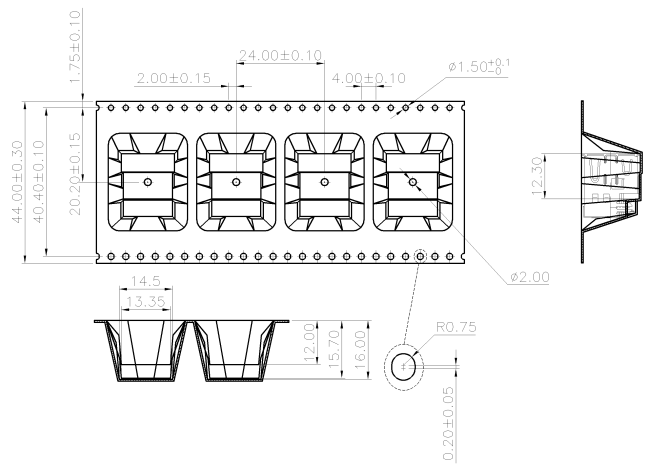

7.01 Kg	2.98 Kg	100	7	700 PCS	4-1734062-3
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS/CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN
DIMENSIONS: MM		CHK
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD
0 PLC	±	PRODUCT SPEC
1 PLC	±	APPLICATION SPEC
2 PLC	±	WEIGHT
3 PLC	±	CUSTOMER DRAWING
4 PLC	±	
ANGLES	±	
MATERIAL	FINISH	

STE TE Connectivity			
NAME			
USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED
A3	00779	C-1734062	
SCALE		SHEET	REV
		21 of 24	G

AMP 1470-19 REV 31MAR2000

4


3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
DW		SEE SHEET 1.			

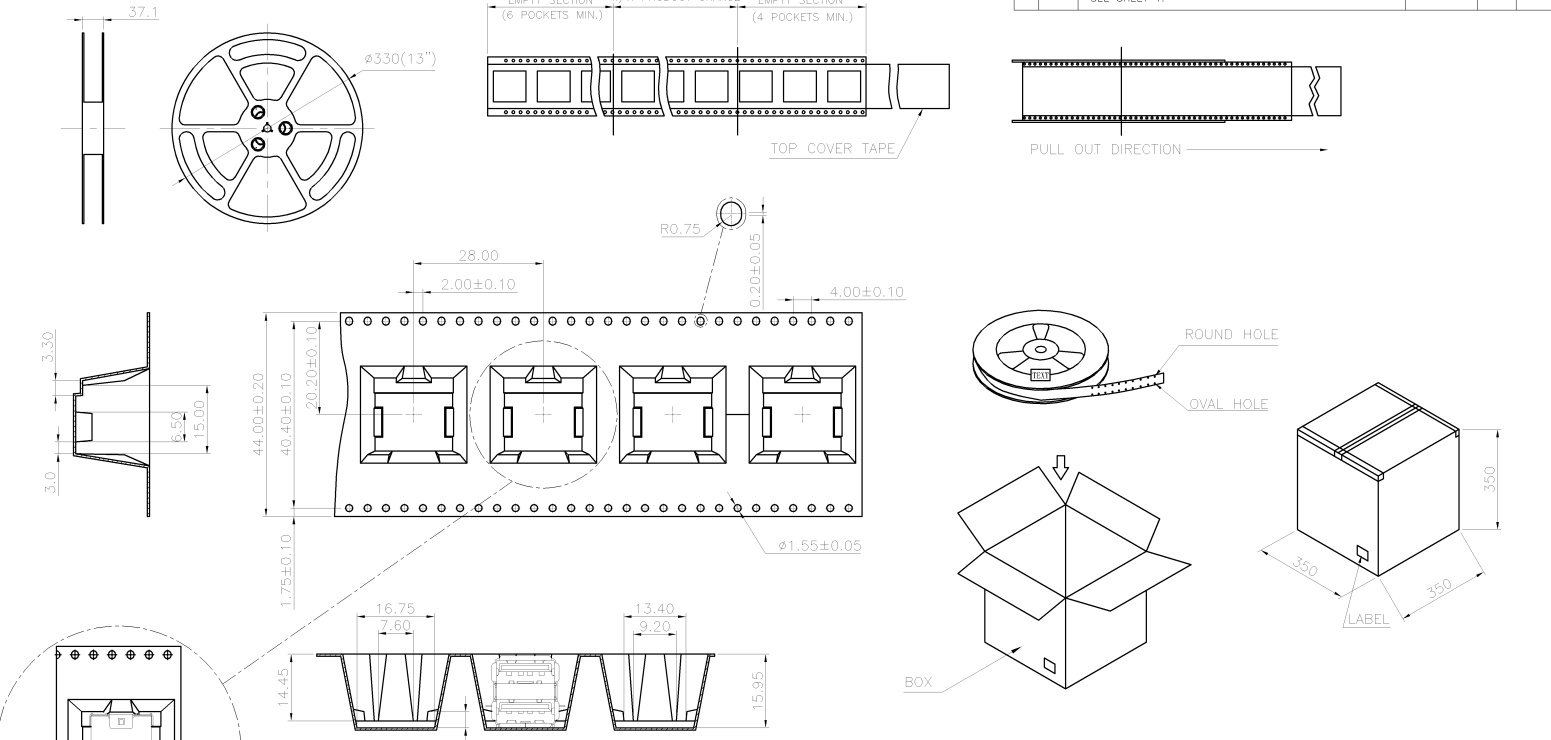

150	7	1050	8.93	4.95	6-1734062-1
PCS/REEL	REELS/BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

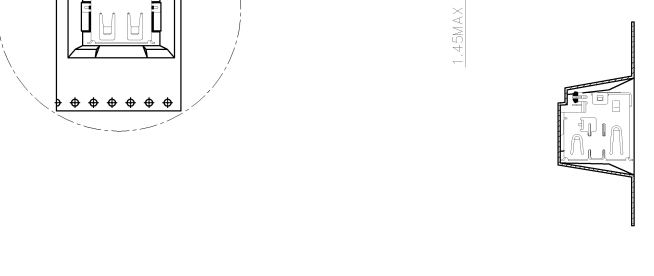

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	CHK	TE Connectivity	
MM	0 PLC ±	APVD	NAME	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE	
	1 PLC ±	PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
	2 PLC ±	APPLICATION SPEC	A3	00779	1734062
	3 PLC ±	WEIGHT	CUSTOMER DRAWING		
	4 PLC ±	SCALE	SHEET 22 of 24 REV G		
MATERIAL	FINISH				

AMP 1470-19 REV 31MAR2000

4









3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
DW		SEE SHEET 1.			

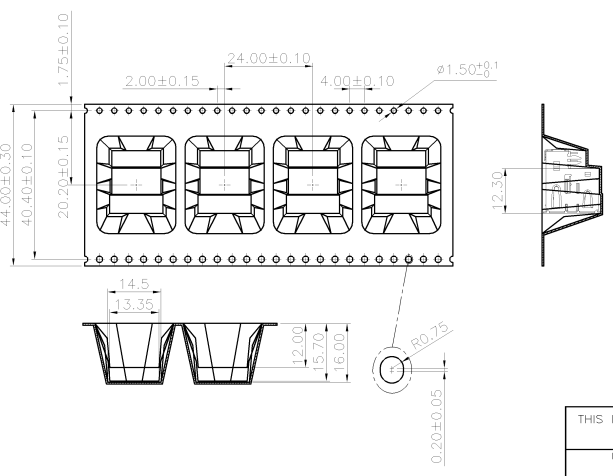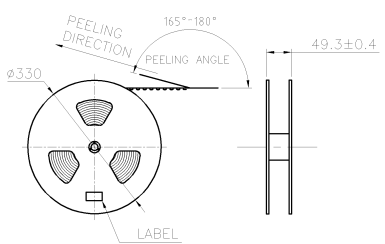

130	7	910	7.94	3.91	7-1734062-1
PCS/ REEL	REELS/ BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	CHK	APVD	NAME
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	TE Connectivity		
2 PLC ± -	3 PLC ± -	APPLICATION SPEC	USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE		
4 PLC ± -	ANGLES ± -	WEIGHT	SIZE	CAGE CODE	DRAWING NO
MATERIAL	FINISH	CUSTOMER DRAWING	A3	00779	1734062
			SCALE	SHEET	REV
				23 of 24	G

4



3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.					

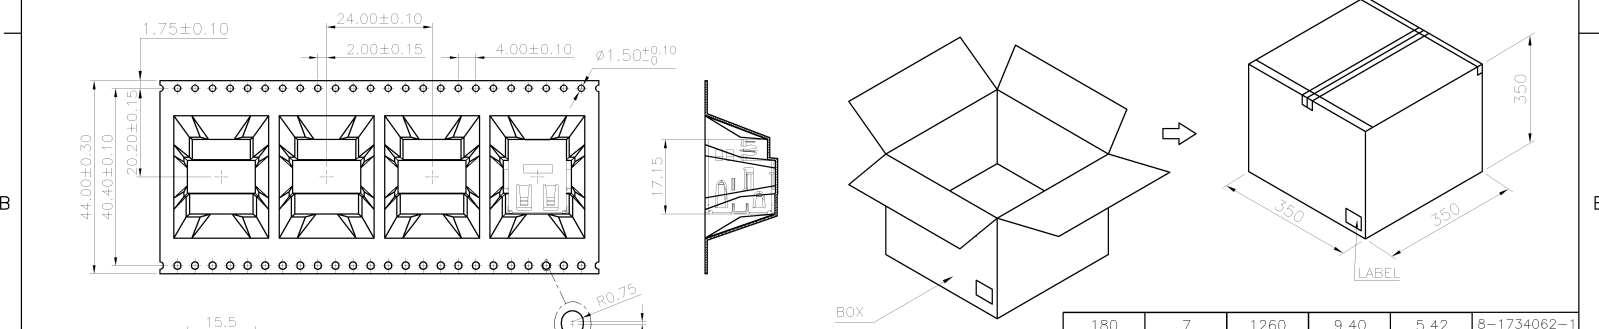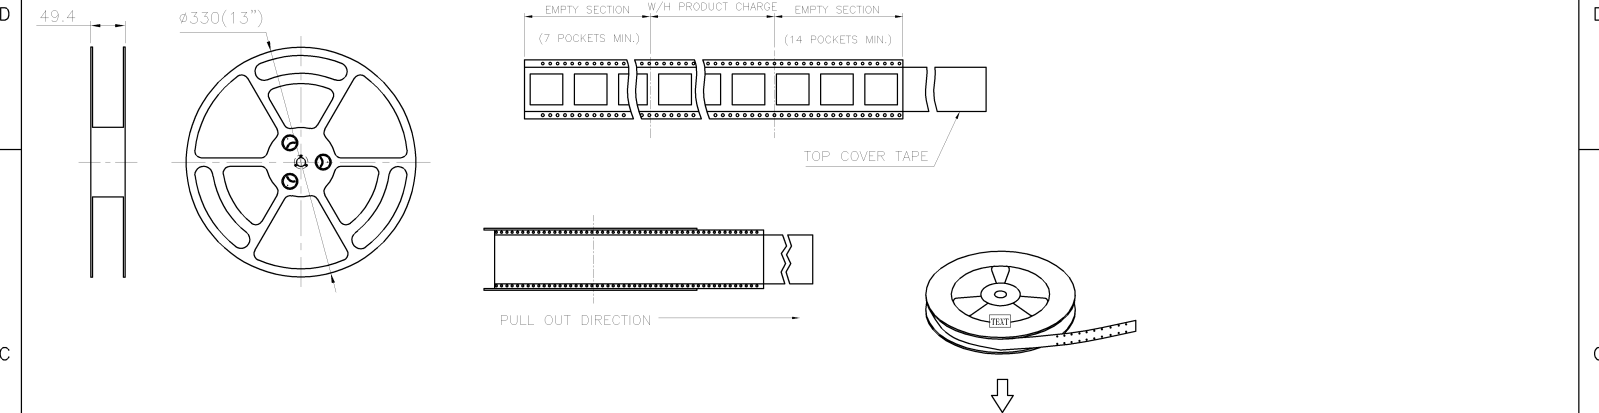

180	7	1260	9.40	5.42	8-1734062-1
PCS/ REEL	REELS/ BOX	QUANTITY (PCS)	G/W (kg)	N/W (kg)	PART NUMBER

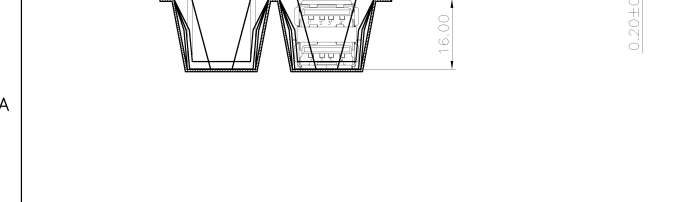

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	CHK	 TE Connectivity USB CONNECTOR, A SERIES, STACKED, OFFSET TYPE
MM	0 PLC ± -	APVD	NAME	
	1 PLC ± -	PRODUCT SPEC	SIZE	
	2 PLC ± -	APPLICATION SPEC	CAGE CODE	
MATERIAL	3 PLC ± -	WEIGHT	DRAWING NO	RESTRICTED
	4 PLC ± -	CUSTOMER DRAWING	A300779	
	ANGLES ± -	SCALE	1734062	
	FINISH	SHEET	24 of 24	REV
				G

AMP 1470-19 REV 31MAR2000