
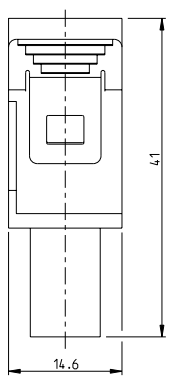
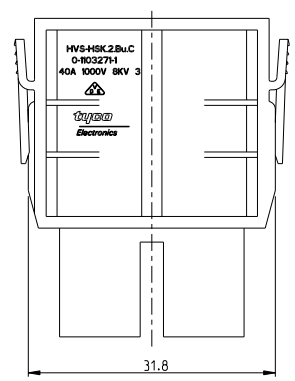


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2000
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DRN	APVD
C1		ECR-10-023156	11NOV2010	SR	OH

PN 0-1 As Shown

Contact arrangement
view from connecting side

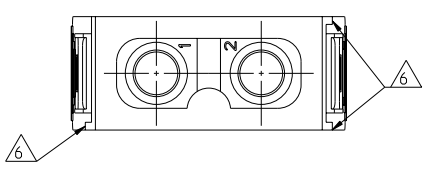


Contact arrangement
view from termination side

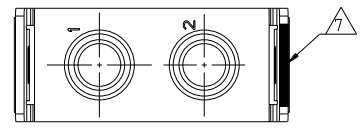

NOTES

- 1 SUITABLE CRIMP CONTACTS: SERIES HSK
CUSTOMER DRAWING: 1108756
OUTER DIMENSIONS OF INSULATION: MAX. Ø8mm
- 2 SUITABLE MODULE FIXING FRAME: SERIES HVS SIZE 3 TO 8
CUSTOMER DRAWING: 1103250
- 3 SUITABLE INSERTION TOOL:
CUSTOMER DRAWING: 1102855
- 4 SUITABLE EXTRACTION TOOL:
CUSTOMER DRAWING: 1102855
- 5 STANDARDS:
DIN EN 61984; DIN EN 60664-1
- 6 POLARIZATION RIPS
- 7 MARKING OF POLARIZATION ACCORDING TO MARKING OF
MODULE FRAME
- 8 PACKAGING:
10 PIECES IN A CARTON



1	FEMALE INSERT	PC-GF20	LYGHT GREY	1
0-1	DESCRIPTION	MATERIAL	COLOR	ITEM NO
	HVS-HSK.2.BU.C			

<small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small>		DWN 20.02.2006 SCHNEIDER CHK 20.02.2006 A.GAST APVD 20.02.2006 T.SCHNURPFEL
DIMENSIONS: mm 	TOLERANCES UNLESS OTHERWISE SPECIFIED: DIM 0-100 ±0.15 DIM 100-250 ±0.2 DIM 250-500 ±0.3 DIM 500-1000 ±0.4 DIM >1000 ±0.5 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± AMPERES ±	NAME FEMALE INSERT ASSY HVS-HSK.2.BU.C PRODUCT SPEC 108-74081 APPLICATION SPEC 114-74083 WEIGHT 0.008 Kg CUSTOMER DRAWING
MATERIAL 	FINISH 	SIZE CAGE CODE DRAWING NO RESTRICTED TO A3 00779 C=1103271

SCALE 2:1	SHEET 1 OF 1	REV C1
-----------	--------------	--------