


THIS DRAWING IS UNPUBLISHED.
 VERBODEN DE UNVEROEFENTLIJKE ZEICHNING
 (C) COPYRIGHT 1997 BY AMP INCORPORATED. ALL RIGHTS RESERVED.
 FREI FÜR VERÖFFENTLICHUNG
 1997. PASSEND ZU
 -

| LOC | DIST | REVISIONS | | | | | |
|-------------|------|-----------|----------------------|--------------|----------|------|----|
| PROJEKT NR. | P | LTR | DESCRIPTION | DATE | DWN | APVD | |
| A1 | - | A4 | Tabelle überarbeitet | EG00-0027-05 | 10.01.05 | SR | AR |

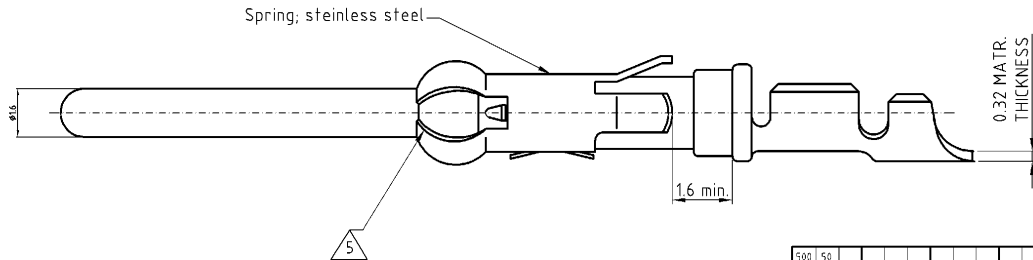

- 1 Packaging 50
Packed in poly bag PN 0-1243085-8
- 2 Packaging 500
Packed in poly bag PN 0-1243085-8
- 3 Cut to 5000 loose pieces from roll
- 4 Cut to 4000 loose pieces from roll

Notes:
 1 For crimpdetails see AMP-SPEC. 114-19.000
 2 Meets productspecification 108-10042
 S 0.40 max. gap between spring-nose and contact body.

| 500 | 50 | | | | | | | | | | | DESCRIPTION | MATERIAL | SURFACE COLOR | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------------------|----------|---------------|------------------------------------------|----------|---------------|
| 1 | | | | | | | | | | | | Pin contact HD M | Brass | fin plated | | | |
| | 500 | 50 | | | | | | | | | | Pin contact HD M | Brass | fin plated | | | |
| | | | 1 | | | | | | | | | Pin contact HD M | Brass | fin plated | | | |
| | | | | 500 | 50 | | | | | | | Pin contact HD M | Brass | fin plated | | | |
| | | | | | | 1 | | | | | | Pin contact HD M | Brass | fin plated | | | |
| | | | | | | | 500 | 50 | | | | Pin contact HD M | Brass | gold plated | | | |
| | | | | | | | | | 1 | | | Pin contact HD M | Brass | gold plated | | | |
| | | | | | | | | | | 500 | 50 | Pin contact HD M | Brass | gold plated | | | |
| | | | | | | | | | | | 1 | Pin contact HD M | Brass | gold plated | | | |
| 4-9 | 4-3 | 4-5 | 2-9 | 2-3 | 2-5 | 1-9 | 1-3 | 1-6 | 3-9 | 3-2 | 3-5 | 1-9 | 1-2 | 1-5 | DESCRIPTION / BENENNUNG | MATERIAL | SURFACE COLOR |
| | | | | | | | | | | | | | | | HD M-C-Sti. Au. 0,3-0,56 mm ² | | |
| | | | | | | | | | | | | | | | HD M-C-Sti. Au. 0,3-0,56 mm ² | | |
| | | | | | | | | | | | | | | | HD M-C-Sti. Au. 0,3-0,56 mm ² | | |
| | | | | | | | | | | | | | | | HD M-C-Sti. Au. 0,8-1,5 mm ² | | |
| | | | | | | | | | | | | | | | HD M-C-Sti. Au. 0,8-1,5 mm ² | | |
| | | | | | | | | | | | | | | | HD M-C-Sti. Sn. 0,3-0,56 mm ² | | |
| | | | | | | | | | | | | | | | HD M-C-Sti. Sn. 0,3-0,56 mm ² | | |
| | | | | | | | | | | | | | | | HD M-C-Sti. Sn. 0,5-1,5 mm ² | | |
| | | | | | | | | | | | | | | | HD M-C-Sti. Sn. 0,5-1,5 mm ² | | |
| | | | | | | | | | | | | | | | HD M-C-Sti. Sn. 1,5-2,5 mm ² | | |
| | | | | | | | | | | | | | | | HD M-C-Sti. Sn. 1,5-2,5 mm ² | | |
| | | | | | | | | | | | | | | | HD M-C-Sti. Sn. 1,5-2,5 mm ² | | |

| | | | | | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------|-----------|-------------------|------|----------------------------|--|
| <small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION. DIESES ZEICHNUNGSGRUPPIERT WIRD DURCH AMP CORPORATION VON ZEIT ZU ZEIT. MAN SOLLTE DIESE TECHNISCHE INFORMATIONS DURCH AMP CORPORATION FÜR DIE LATEST REVISION ANFORDERN. VERÄNDERUNGEN SOLLTEN DURCH AMP CORPORATION FÜR DIE LATEST REVISION ANFORDERN.</small> | | DWN | Schneider | 19.10.01 | | HTS Elektrotechnik | |
| <small>ALLOUWIS TOLERANZEN n. ISO 8075 - mm ± e n. ISO 2768 - mm ± e n. DIN 16901 - 16.0</small> | | CHK | Schweiger | 19.10.01 | | 53819 Neunkirchen, Germany | |
| <small>OTHERWISE SPECIFIED: 1 PLC 2 PLC 3 PLC</small> | | APVD | - | - | NAME | | |
| <small>FINISH / OBERFLÄCHE / FARBE</small> | | PRODUCT SPEC | | Pin contact | | RESTRICTED TO NUR FÜR | |
| <small>ANGLES / WINKEL</small> | | PRODUCTSPEZ. | | Kontaktstift HD M | | | |
| <small>MATERIAL</small> | | APPLICATION SPEC | | SIZE | | REV | |
| <small>VERARBEITUNGSSPEZ.</small> | | VERARBEITUNGSSPEZ. | | A3 00779 | | | |
| <small>WEIGHT</small> | | CUSTOMER DRAWING | | DRAWING NO | | OF | |
| <small>GEWICHT</small> | | /KUNDENZEICHNUNG | | =1105000 | | | |
| <small>REVISIONS</small> | | BLATT | | REV | | A4 | |
| <small>ÄNDERUNGEN</small> | | 5 1 | | 1 | | | |