


4

3




2

1

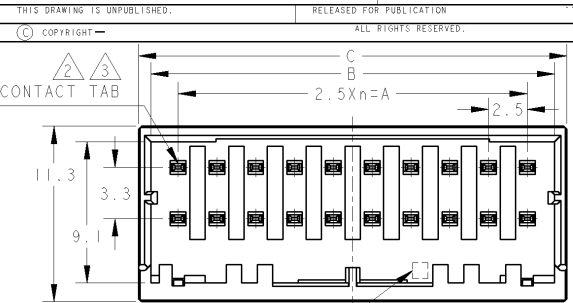

1. 材料:ハウジング:ガラス入り熱可塑性ポリエステル樹脂(94V-0)、色:黒
コンタクト:銅合金
リテンションレグ:異なった銅合金
2. めっき:全面:ニッケル下処理めっき1.27μm以上
3. めっき:接触部 2. の上に金めっき0.38μm以上
4. めっき:コンタクト半田付部: 2. の上に銅めっき2μm以上
5. 文字の形状、大きさ、および位置については、大略を示すものであり、詳細を示すものではありません。
6. Y KEY形状は、X KEY形状と左右対称


LOC	DIST	REVISIONS					
J	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A5		REVISED PER ECO-11-005030	26APR11	RK	HMR

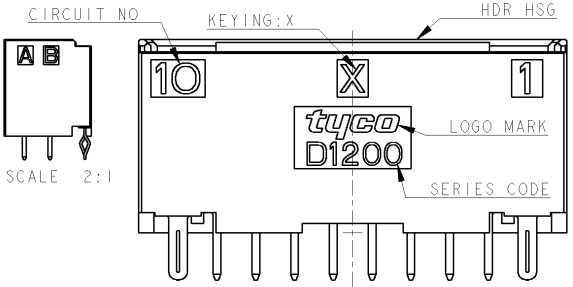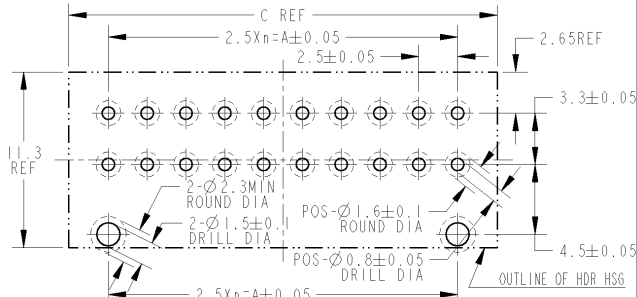


推奨基板取付穴寸法: コネクタ搭載面(非票倍公差)
PC基板厚: 1.0~1.6±0.1

RECOMMEND PC BOARD HOLE PATTERN
: CONNECTOR MOUNT SIDE(NOT ACCUMULATE TOLERANCE)
PC BOARD THICKNESS : 1.0~1.6±0.1

20	Y	9	22.5	26.0	27.6	2-1827875-0
20	X	9	22.5	26.0	27.6	1-1827875-0
16	Y	7	17.5	21.0	22.6	2-1827875-8
16	X	7	17.5	21.0	22.6	1-1827875-8
12	Y	5	12.5	16.0	17.6	2-1827875-6
12	X	5	12.5	16.0	17.6	1-1827875-6
10	Y	4	10.0	13.5	15.1	2-1827875-5
10	X	4	10.0	13.5	15.1	1-1827875-5
8	Y	3	7.5	11.0	12.6	2-1827875-4
8	X	3	7.5	11.0	12.6	1-1827875-4
6	Y	2	5.0	8.5	10.1	2-1827875-3
6	X	2	5.0	8.5	10.1	1-1827875-3
4	Y	1	2.5	6.0	7.6	2-1827875-2
4	X	1	2.5	6.0	7.6	1-1827875-2
POS	KEY	n	A	B	C	PART NO

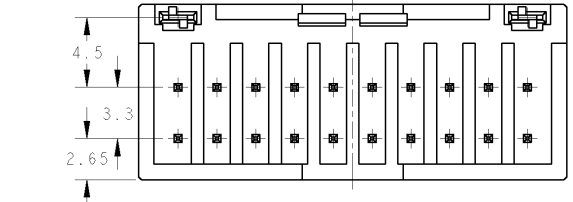

1. MATERIAL: HOUSING: GLASS FILLED THERMO PLASTIC
POLYESTER(94V-0), COLOR: BLACK
CONTACT: COPPER ALLOY
RETENTION LEG: PRE-TIN COPPER ALLOY
2. FINISH(ALL OVER): NICKEL PL. 1.27μmMIN
3. FINISH(CONTACT AREA): GOLD PL. 0.38μmMIN AFTER 2.
4. FINISH(CONTACT TAIL): TIN PL. 2μmMIN AFTER 2.
5. THE SHAPE, SIZE AND POSITION OF THE CHARACTER SHOW THE OUTLINE. THEY DON'T SHOW DETAILS.
6. THE KEYING ARRANGEMENT OF "Y" IS SYMMETRIC WITH "X".

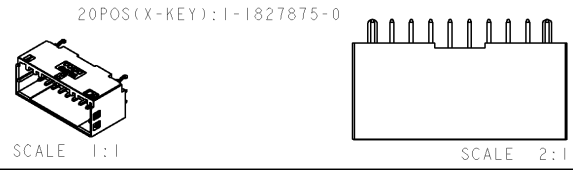

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: mm		OWN: T. KUDO 14JAN2005	CHK: D. MITSUGI 14JAN2005	APVD: D. MITSUGI 14JAN2005		NAME: D. MITSUGI	
0-PLC ±0.3, ±0.5		1-PLC ±0.5		PRODUCT SPEC 108-78268		APPLICATION SPEC 114-5377		SIZE: A3	
MATERIAL: 銅合金		FINISH: 金		WEIGHT: -		CAGE CODE: 00779		DRAWING NO: C-1827875	
CUSTOMER DRAWING		SCALE: 4:1		SHEET: 1 OF 3		REV: A5		RESTRICTED TO	


20POS(X-KEY): 1-1827875-0

TE Connectivity

DYNAMIC D1200D 2.5mm PITCH HDR ASSY (V-TYPE) 4-20POS





4POS(X-KEY): 1-1827875-2

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

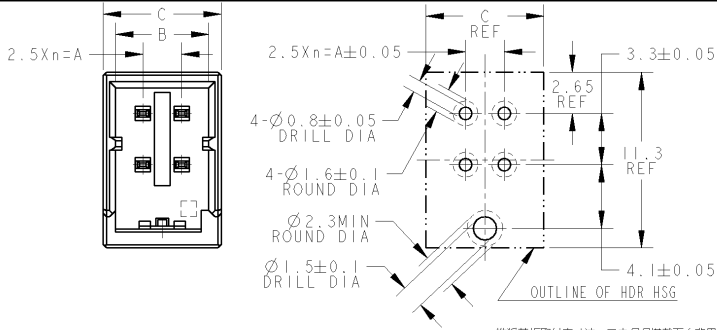

推奨基板取付寸法: コネクタ搭載面(非累積公差)
PC基板厚: 1.0~1.6±0.1
RECOMMEND PC BOARD HOLE PATTERN
: CONNECTOR MOUNT SIDE (NOT ACCUMULATE TOLERANCE)
PC BOARD THICKNESS : 1.0~1.6±0.1







ONLY 4POS



4POS(X-KEY): 1-1827875-2

SCALE 2:1

LOC	DIST	REVISIONS					
J	-	P	LTR	DESCRIPTION	DATE	DNW	APVD
		SEE SHEET 1					



6POS(X-KEY): 1-1827875-3

8POS(X-KEY): 1-1827875-4

DIMENSIONS:	TO DIMENSIONS UNLESS OTHERWISE SPECIFIED:	DNW	14 JAN 2005	TE Connectivity	RESTRICTED TO
		1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH ±	CHK		
MATERIAL	SEE SHEET 1 OF 3	APVD	D. MITSUGI	NAME	DYNAMIC D1200D 2.5mm PITCH HDR ASSY (V-TYPE) 4-20POS
		PRODUCT SPEC	108-78268	SIZE	A3
		APPLICATION SPEC	114-5377	CAGE CODE	00779
		WEIGHT	-	DRAWING NO	C-1827875
		CUSTOMER DRAWING		SCALE	4:1
				SHEET	2 OF 3
				REV	A5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION










ALL RIGHTS RESERVED.

© COPYRIGHT

LOC DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

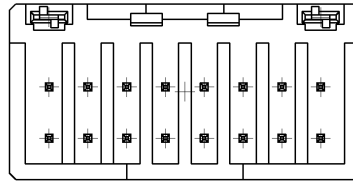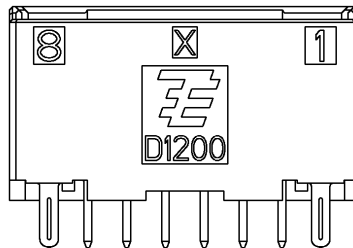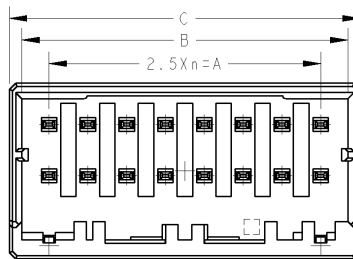

10POS(X-KEY): 1-1827875-5

12POS(X-KEY): 1-1827875-6

16POS(X-KEY): 1-1827875-8

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	1 PLC	±	DWN T. KUDO 14JAN2005	NAME DYNAMIC D1200D 2.5mmPITCH HDR ASSY (V-TYPE) 4-20POS
		2 PLC	±		
MATERIAL	FINISH	3 PLC	±	CHK D. MITSUGI 14JAN2005	RESTRICTED TO
		4 PLC	±	APVD D. MITSUGI 14JAN2005	
SEE SHEET 1 OF 3			ANGLES	±	SIZE A3
			APPLICATION SPEC	108-78268	CAGE CODE 00779
			WEIGHT	114-5377	DRAWING NO C-1827875
			CUSTOMER DRAWING	SCALE 4:1	SHEET 3 OF 3
					REV A5

STE TE Connectivity