
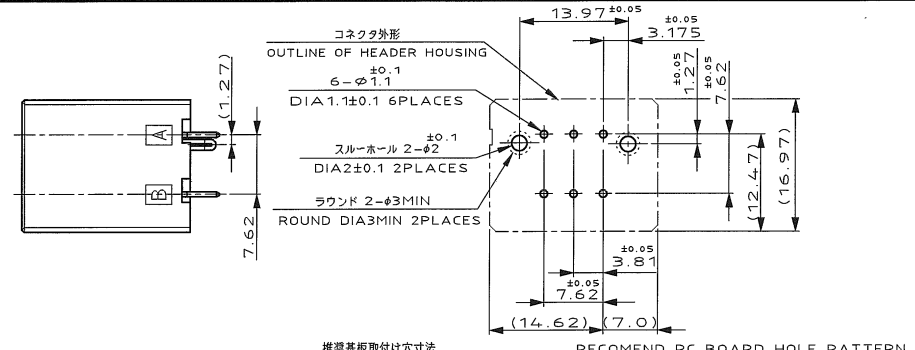
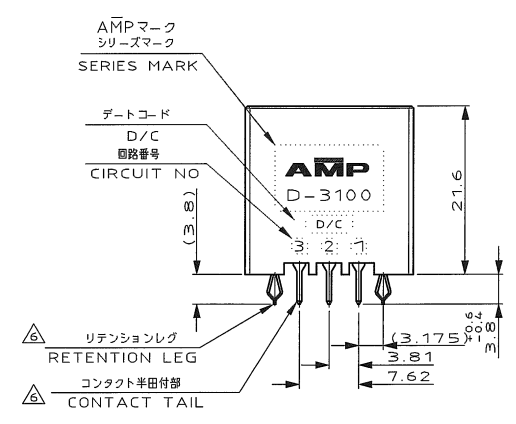


NUMBER 178141
 METRIC
 3°±0.5° ANGLE PROJECTION
 PRINT DIST
 DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

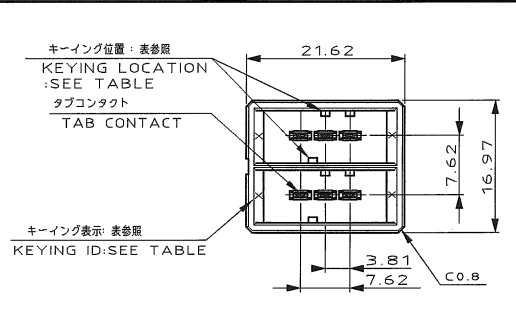

NOTES

1. MATERIAL: HOUSING: GLASS FILLED THERMO PLASTIC, POLYESTER (94V-0), COLOR: BLACK
 CONTACT: COPPER ALLOY
 RETENTION LEG: COPPER ALLOY
 △ FINISH (CONTACT AREA): 0.38μm MIN GOLD PLATING OVER Ni PLATING
 △ FINISH (CONTACT AREA): 0.76μm MIN GOLD PLATING OVER Ni PLATING
 △ FINISH (CONTACT AREA): 2.0 μm MIN TIN PLATED OVER NICKEL
 △ FINISH (RETENTION LEG): TIN LEAD PLATED (CONTACT TAIL) OVER NICKEL
 △ FINISH (RETENTION LEG): TIN PLATED (CONTACT TAIL) OVER NICKEL

注記

1. 材料: ハウジング: ガラス入り熱可塑性
 ポリエステル樹脂 (94V-0), 色: 黒
 コンタクト: 銅合金
 リテンションレグ: 銅合金
 △ めっき: コンタクト: 全面 Ni 下地
 接触部: 0.38μm MIN 金めっき
 △ めっき: コンタクト: 全面 Ni 下地
 接触部: 0.76μm MIN 金めっき
 △ めっき: コンタクト: 全面 Ni 下地
 接触部: 2.0 μm MIN スズめっき
 △ めっき: リテンションレグとコンタクト半田付部
 ニッケル下地の土に半田めっき
 : ニッケル下地の土にスズめっき

A ROW				△	△	3-178141-5
B ROW		X	Y	△	△	3-178141-3
A ROW				△	△	3-178141-2
B ROW		X	X	△	△	1-178141-5
				△	△	1-178141-3
				△	△	1-178141-2
	KEYING LOCATION	A ROW KEYING	B ROW KEYING	FINISH		製品番号 PART NO.

WIRE RANGE		INSULATION DIA	NAME	DYNAMIC D-3100 3.81X7.62PITCH(V) 6 POS.HDR CONN.ASS'Y		
MATERIAL		FINISH	一般公差 (GENERAL TOLERANCE)	SIZE	LOC	NUMBER
SEE NOTE		SEE NOTE	100% ±0.3	A3	J	C=178141
LTR		REVISED PER ECO-11-005030	DR. 19 APR 94	SCALE	REV.	SHEET
CHK. S. MANABE		RK	DE. 19 APR 94	2-1	E1	1 OF 1
DR. 19 APR 94		DR	CHK. S. MANABE			
CHK. S. MANABE		DR	APP. S. MANABE			

(CUSTOMER DRAWING) 顧客用図面