

4








3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION.
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LNK	DESCRIPTION	DATE	BY	APP
D		REVISED PER ECR 10-018921	13SEPT10	JR	TM

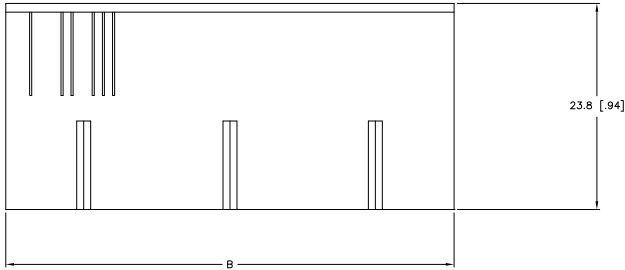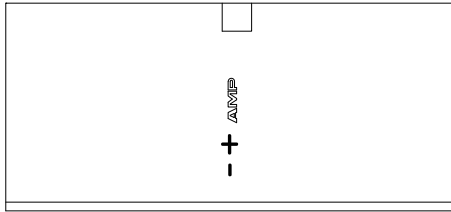

- 1 POLYAMIDE, UL94V-2, WHITE.
- 2 FLAMMABILITY V2 FOR THICKNESS 0.38mm, 1.5mm, and 3.0mm PER IEC 60695-11-10.
- 3 GLOW-WIRE FLAMMABILITY (GWI) 800°C FOR THICKNESS 0.38mm AND 0.75mm PER IEC 60695-2-12.
- 4 GLOW-WIRE FLAMMABILITY (GWI) 960°C FOR THICKNESS 1.5mm AND 3.0mm PER IEC 60695-2-12.
- 5 GLOW-WIRE IGNITION (GWI) 825°C FOR THICKNESS 0.38mm, 0.75mm, 1.5mm AND 3.0mm PER IEC 60695-2-13.

DIM B	DIM A	POS	PART NUMBER
51.6	46.2	24	2-1586862-4
47.4	42.0	22	2-1586862-2
43.2	37.8	20	2-1586862-0
39.0	33.6	18	1-1586862-8
34.8	29.4	16	1-1586862-6
30.6	25.2	14	1-1586862-4
26.4	21.0	12	1-1586862-2
22.2	16.8	10	1-1586862-0
18.0	12.6	8	1586862-8
13.8	8.4	6	1586862-6
9.6	4.2	4	1586862-4
5.4	--	2	1586862-2

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED	DRW: K. WHITAKER 11JUL2007	CHK: C. CASH 11JUL2007	APPROVED: C. CASH 11JUL2007	NAME: Tyco Electronics Corporation, Harrisburg, PA 17105-3608
0 PL. ±	0 PL. ± 0.4 [.02]	APPLICATION SPEC:			SIZE: A2
1 PL. ±	1 PL. ± 0.25 [.010]	WEIGHT:			CAGE CODE: 1586862
2 PL. ±	2 PL. ± 0.150 [.0059]	FINISH:			DRAWING NO: 1586862
3 PL. ±	3 PL. ±	MATERIAL: POLYAMIDE			RESTRICTED TO: -
4 PL. ±	4 PL. ±	CUSTOMER DRAWING			SCALE: 1:1 SHEET: 1 of 1 REV: D