

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.



LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
B		REVISED PER ECR-10-013244	10JUL2010	HMR	TM

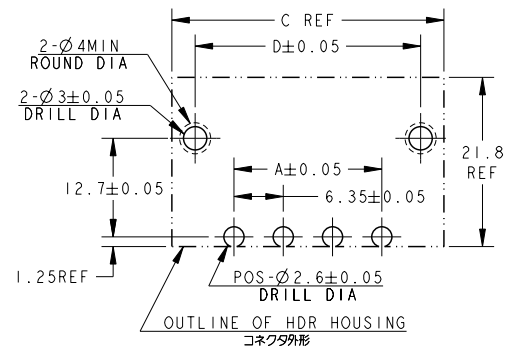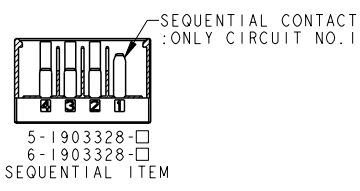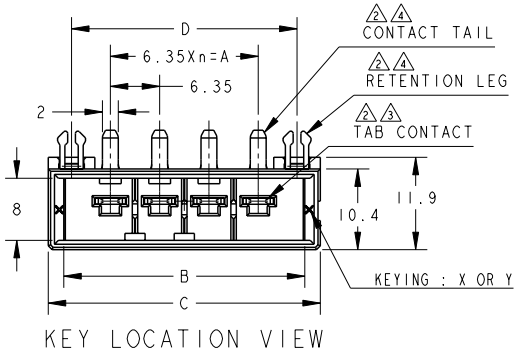

RECOMMEND PC BOARD HOLE PATTERN : CONNECTOR MOUNT SIDE (NOT ACCUMULATE TOLERANCE)  
 PC BOARD THICKNESS : 1.6~2.4±0.1  
 推奨基板取付寸法: コネクタ搭載面 (非累積公差)  
 PC基板厚: 1.6~2.4±0.1

AS SHOWN : 1-1903328-4 (4POS: X-KEY)

POS	n	A	B	C	D	KEY LOCATION	KEY	PART NUMBER
4	3	19.05	31.05	35.05	29.05		Y	2-1903328-4 6-1903328-4
4	3	19.05	31.05	35.05	29.05		X	1-1903328-4 5-1903328-4
3	2	12.70	24.70	28.70	22.70		Y	2-1903328-3 6-1903328-3
3	2	12.70	24.70	28.70	22.70		X	1-1903328-3 5-1903328-3
2	1	6.35	18.35	22.35	16.35		Y	2-1903328-2
2	1	6.35	18.35	22.35	16.35		X	1-1903328-2

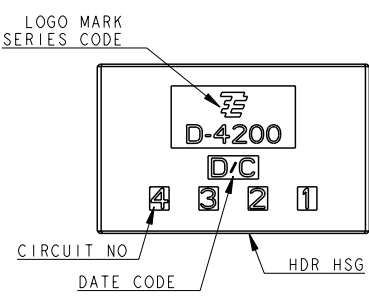

1. MATERIAL: HOUSING: GLASS FILLED THERMO PLASTIC POLYESTER (94V-0), COLOR: BLACK  
 CONTACT: COPPER ALLOY  
 RETENTION LEG: COPPER ALLOY

- △. FINISH (ALL OVER): NICKEL PL. 1.3μmMIN
- △. FINISH (CONTACT AREA): GOLD PL. 0.38μmMIN AFTER △
- △. FINISH (CONTACT TAIL & RETENTION LEG): TIN PL. 2μmMIN AFTER △

1. 材料: ハウジング: ガラス入り熱可塑性ポリエステル樹脂 (94V-0), 色: 黒  
 コンタクト: 銅合金  
 リテンションレグ: 銅合金

- △. めっき (全面): ニッケル下地めっき 1.3μm以上。
- △. めっき (接触部): △の上に金めっき 0.38μm以上。
- △. めっき (コンタクト半田付部とリテンションレグ): △の上に錫めっき 2μm以上。

DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: - 一般公差 ±0.3, ±3° 0-PLC ±0.1 1-PLC ±0.1 2-PLC ±0.01 3-PLC ±0.001 4-PLC ±0.0001 ANGLES ±0.0001 FINISH 以上		DWN 23MAR2007 M. MAEBASHI CHK 23MAR2007 T. KUDO APVD 23MAR2007 D. MITSUGI PRODUCT SPEC 108-78182 APPLICATION SPEC 114-5369 WEIGHT - CUSTOMER DRAWING	Tyco Electronics Tyco Electronics AMP K.K. Kawasaki, Japan NAME 00779 DYNAMIC D4200S 6.35mmPITCH HDR ASSY (H-TYPE) 2-4POS SIZE A3 CAGE CODE 00779 DRAWING NO. C-1903328 RESTRICTED TO
---	--	--	---