THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST
CF	39

REVISIONS

Y	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REV & REDRAWN PER ECO820-0995-95	12-6-95	LM	CA
	B	REV PER 0820-0326-96	4-19-96	TS	GG
	C	REV PER 0820-0909-96	10-11-96	TS	GG
	D	ADD -7 0820-1153-96	12-6-96	TS	GG
	E	REV PER 0520-0262-02	14MAY02	TS	CA

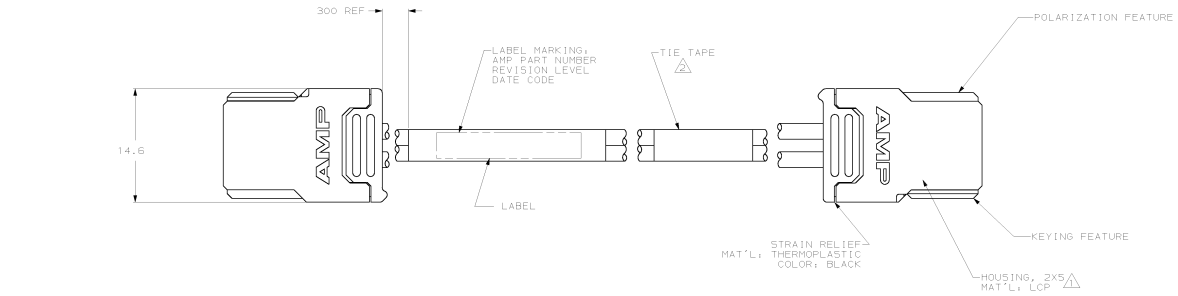

1 EACH HOUSING CONTAINS 5 SOCKET CONTACTS. CONTACTS ARE PLATED WITH .00038 MIN THICK GOLD OVER .00127 MIN THICK NICKEL.

2 ADDITIONAL TIE TAPE PLACED ON CABLE BUNDLE, SPACED EVERY 625 mm MAX.

3. MAXIMUM ALLOWABLE MATING POST LENGTH 8.5mm

4. CABLE : SIGNAL & DRAINS 28 AWG SOLID
PROPAGATION DELAY 4.265 NS/METER NOM
IMPEDANCE 100 OHMS DIFFERENTIAL NOM
JACKET PVC - UL RECOGNITION



WIRING DIAGRAM

DIM L	PART NUMBER
10000.0±125.0	621275-7
1500.0±25.0	621275-6
5000.0±75.0	621275-5
4000.0±50.0	621275-4
3000.0±50.0	621275-3
2000.0±25.0	621275-2
1000.0±20.0	621275-1

DWN M. MORNINGSTAR 12-6-95
CH C. ADAMS 12-6-95
APVD C. ADAMS 12-6-95
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —
CUSTOMER DRAWING

AMP Incorporated
Harrisburg, PA 17105-3608

NAME CABLE ASSEMBLY, 1 x 5, 100 OHM, 2mm HM

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-621275

SCALE 4:1 | SHEET 1 OF 1 | REV E

Downloaded from Elcodis.com electronic components distributor