

LOC	DIFF	REV	DESCRIPTION	DATE	APP	APP
1	-	B4	REVISED PER ECO-11-005033	20080211	RR	HMR

- 1) MALE CONNECTOR MATEABLE WITH FEMALE PART P/N 284848-1/-3 (CONNETTORE PORTA-MASCHI ACCOPPIABILE CON RELATIVO PORTA-FEMMINE P/N 284848-1/-3)
- 2) 4 CAVITIES SUITABLE FOR 2.8 TAB TIN PLTD: P/N 2-964300-1 WIRE RANGE 0.5-1.0mm², WIRE SEAL P/N 963294-1 P/N 2-964302-1 WIRE RANGE >1.0-1.5mm², WIRE SEAL P/N 963293-1 P/N 2-964302-1 WIRE RANGE 2.5mm², WIRE SEAL P/N 963292-1 CAVITY PLUG P/N 828922-1
14 CAVITA' ADATTE PER CONTATTO TAB 2.8 STAGNATO: P/N 2-964300-1 SEZ. FILO 0.5-1.0mm², GOMMINO P/N 963294-1 P/N 2-964302-1 SEZ. FILO >1.0-1.5mm², GOMMINO P/N 963293-1 P/N 2-964302-1 SEZ. FILO 2.5mm², GOMMINO P/N 963292-1 TAPPO CAVITA' P/N 828922-1
- 3) 8 CAVITIES SUITABLE FOR 1.5 TAB TIN PLTD: P/N 969028-2 WIRE RANGE 0.35mm², WIRE SEAL P/N 284863-1 P/N 964269-2 WIRE RANGE 0.5-1.0mm², WIRE SEAL P/N 284863-1 CAVITY PLUG P/N 828906-2
18 CAVITA' ADATTE PER CONTATTO TAB 1.5 STAGNATO: P/N 969028-2 SEZ. FILO 0.35mm², GOMMINO P/N 284863-1 P/N 964269-2 SEZ. FILO 0.5-1.0mm², GOMMINO P/N 284863-1 TAPPO CAVITA' P/N 828906-2
- 4) CONNECTOR SUPPLIED WITH SECONDARY LOCK PRE-ASSEMBLED AND IN OPEN POSITION (IL CONNETTORE VIENE FORNITO CON IL DISPOSITIVO SECONDARIO PRE-MONTATO ED IN POSIZIONE CHIUSA)
- 5) POLARIZATIONS -3 AND -4 ARE DIFFERENT FROM -1 AND -2 ONLY FOR DIFFERENT POSITION OF PANEL HOOK DEVICE (LE POLARIZZAZIONI -3 E -4 DIFFERISCONO DALLA -1 E -2 SOLAMENTE PER LA POSIZIONE DEL SISTEMA D'AGGANCIO A PANNELLO) POLARIZATIONS -5 AND -6 ARE DIFFERENT FROM -1 ONLY FOR Nr. 6 PLUGGED CAVITIES FROM MOULD (LE POLARIZZAZIONI -5 E -6 DIFFERISCONO DALLA -1 SOLAMENTE PER LA PRESENZA DI Nr. 6 CAVITA' TAPPATE DI STAMPO)
- 6) CONNECTOR SUITABLE FOR PANEL LOCKING DEVICE P/N 282322-1 (CONNETTORE ADATTO PER DISPOSITIVO D'AGGANCIO A PANNELLO P/N 282322-1)

P/N 284844-1 REV. B BLACK - AS SHOWN (REV. B COLORE NERO - COME MOSTRATO)

ITEM	DESCRIPTION (DESCRIZIONE)	MATERIAL (MATERIALE)	COLOUR (COLORE)	Q.TY (Q.TA)
1	12W MALE HOUSING (12 VIE PORTA-MASCHI)	PA66 G.F.	BLACK OR GRAY (NERO O GRIGIO)	1
2	RETAINER (BLOCCHETTO DI RITENZIONE)	PA66 G.F.	BLACK (NERO)	1
3	SECONDARY LOCK (DISPOSITIVO SECONDARIO)	PA66 G.F.	RED (ROSSO)	1


THIS DRAWING IS A CONTROLLED DOCUMENT. DWG/15: 06MAY2002
 DIMENSIONS: DIMENSIONI: 1:1
 TOLERANCES UNITS: TOLLERANZE UNITA': 0.10
 DIMENSIONS: DIMENSIONI: 1:1
 TOLERANCES UNITS: TOLLERANZE UNITA': 0.10
 DIMENSIONS: DIMENSIONI: 1:1
 TOLERANCES UNITS: TOLLERANZE UNITA': 0.10

TE Connectivity

12 POS. MALE CONNECTOR FOR 1.5 AND 2.8 TAB (12 VIE PORTA-MASCHI PER TAB 1.5 E 2.8)

DATE: 06MAY2002
 DRAWING NO: A200779
 PART NO: 284844

REVISONS		DATE	BY	APPROV
P	LYR			
-	SEE SHEET 1	-	-	-

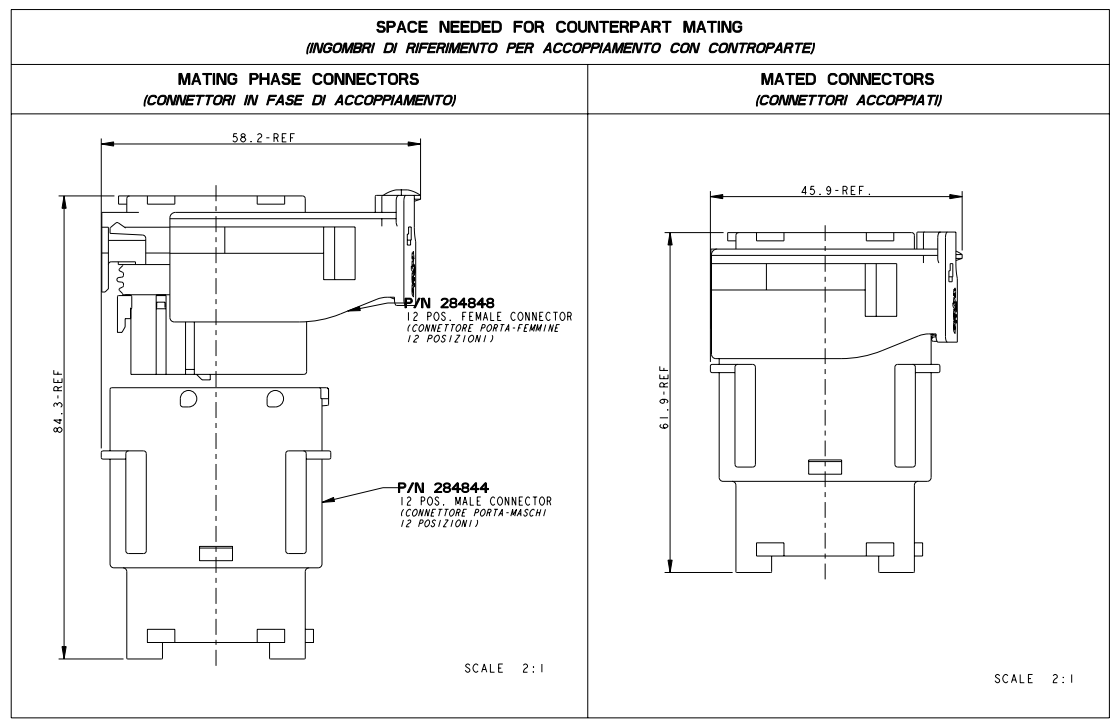

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. M. SARDI CDR. CANUTO APPR. GENOVA 06MAY2002 06MAY2002	
DIMENSIONS: mm	TO BE KEPT IN THE FILE: OPERATING SPECIFICATIONS	NAME 12 POS. MALE CONNECTOR FOR 1.5 AND 2.8 TAB (12 VIE PORTA-MASCHI PER TAB 1.5 E 2.8)	
	0 PLC #0.5 1 PLC #0.3 2 PLC #0.1 3 PLC # 4 PLC # ANGLES 90° FINISH	PRODUCT SPEC 108-20242 APPLICATION SPEC 411-20073 WEIGHT CUSTOMER DRAWING	SIZE CASE CODE DRAWING NO. A200779 C-284844
MATERIAL SEE TABLE	SEE TABLE	RESTRICTED TO	SCALE 1:1 SHEET 3 OF 3 REV B4