THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2011
© COPYRIGHT 2011 Tyco Electronics AMP GmbH ALL RIGHTS RESERVED.

LOC	DIST
GT	-

REVISIONS

P	LTR	DESCRIPTION	DATE	DRN	APVD
	A4	NEW VARIANT ADDED	24AUG2004	BrM	BLM
	A5	NEW VARIANT ADDED	21SEP2011	PM	CV

VERSION A

(UNSEALED / ungedichtet)

1 VERSION WITH REDUCED MATING FORCE
Ausführung mit reduzierter Steckkraft

2 SUITABLE FOR TABS 8x1.2mm AND 9.5x1.2mm
Geeignet für Flachstecker 8x1.2mm und 9.5x1.2mm

△3 FOR CRITIZATION OF THE GAP-SIZE, THE MATING-FORCE HAS PRIORITY.
Zur Beurteilung des Öffnungsmaßes ist die Steckkraft ausschlagebend

△4 1-3 µm TIN LAYER FOR HIGHER TEMPERATURE REQUIREMENTS.
1-3 µm Zinnschicht für höhere Temperaturanforderungen.

A5 △5 CONTACT ZONE SELECTIVE PRE-SILVER PLATED MIN. 3 µm; REST Ag FLASH
Kontaktzone selektiv voresilbert min. 3 µm; Rest Ag Blitz

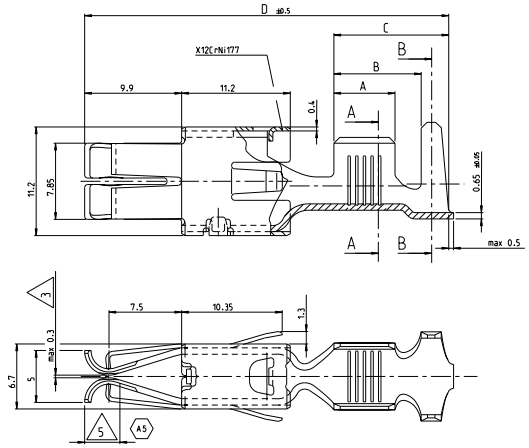

VERSION B

(SINGLE WIRE SEAL-SYSTEM / Einzel-Dichtungs-System)



	PN STRIP FORM Bandware	REV.	PN LOOSE PIECE Einzelteil Streng	MATERIAL Werkstoff	SURFACE Oberfläche	DGB WIRE RANGE [mm²]	SECTION A-A Schnitt A-A	SECTION B-B Schnitt B-B	WIRE-CRIMP Drahtcrimp	SECTION A-A Schnitt A-A	SECTION B-B Schnitt B-B	APPLICATION TOOL Anschlag-WKZ	HAND TOOL Handcrimp	A	B	C	D
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
VERSION B	962938-1	F	962939-1	CuNiSi	vorverzinnt PRETINNED	6.0-10.0 FLK	E = 7.0 G = 7.5 $D_{\varnothing}$ 3.7	H = 13.0 K = 10.0 D = 9.5	10.0mm² = 3.82 - 6.0mm² = 3.20	E = 6.0 G = 7.7 $D_{\varnothing}$ 3.6	H = Ø 11.8 K = 11.5 R = ⁄	MQC-Applicator 2-878660-2	-	6.3	11.9	15.6	41
	962936-1	F	962937-1	CuNiSi	vorverzinnt PRETINNED	4.0-6.0 FLK	E = 5.6 G = 5.9 $D_{\varnothing}$ 3.0	H = 13.0 K = 13.0 D = 9.5	6.0mm² = 3.08 - 4.0mm² = 2.74	E = 4.8 G = 6.0 $D_{\varnothing}$ 2.9	H = Ø 11.8 K = 11.5 R = ⁄	MQC-Applicator 2-878595-2	-	5.5	11.1	14.8	41
	962934-1	D	962935-1	CuNiSi	vorverzinnt PRETINNED	>2.5-4.0 FLK	E = 4.9 G = 5.1 $D_{\varnothing}$ 2.3	H = 13.0 K = 13.0 D = 9.5	4.0mm² = 2.71 -	E = 4.2 G = 5.3 $D_{\varnothing}$ 2.3	H = Ø 11.8 K = 11.5 R = ⁄	MQC-Applicator 2-878594-2	-	4.5	11.1	14.8	41
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
VERSION A	1-962932-6	A	1-962933-6	CuNiSi	△4 vorverzinnt PRETINNED	6.0-10.0 FLK	E = 7.0 G = 7.5 $D_{\varnothing}$ 3.7	H = 9.2 K = 10.0 D = 5.9	10.0mm² = 3.82 8.5mm² = 3.59 6.5mm² = 3.28 6.0mm² = 3.20	E = 6.0 G = 7.7 $D_{\varnothing}$ 3.6	H = 7.8 K = 8.5 R = 4.2	MQC-Applicator 2-878659-2	734533-1 (only for 10mm²)	6.3	9.0	11.8	37.5
	962932-1	H	962933-1	CuNiSi													
	1-962930-6	A	1-962931-6	CuNiSi	△4 vorverzinnt PRETINNED	4.0-6.0 FLK	E = 5.6 G = 5.9 $D_{\varnothing}$ 3.0	H = 7.8 K = 8.1 D = 4.5	6.0mm² = 3.08 5.5mm² = 3.00 5.0mm² = 2.91 4.0mm² = 2.74	E = 4.8 G = 6.0 $D_{\varnothing}$ 2.9	H = 6.9 K = 6.95 R = 3.8	MQC-Applicator 2-878593-2	734532-1 (only for 6mm²)	5.5	7.8	10.1	37.5
	962930-1	H	962931-1	CuNiSi													
	962928-3 A5	G	-	CuNiSi	△5 vorverzinnt PRETINNED	2.5-4.0 FLK	E = 4.9 G = 5.1 $D_{\varnothing}$ 2.3	H = 6.9 K = 7.2 D = 4.0	4.0mm² = 2.71 3.5mm² = 2.62 3.0mm² = 2.52 2.5mm² = 2.42	E = 4.2 G = 5.3 $D_{\varnothing}$ 2.3	H = 5.8 K = 6.35 R = 3.3	MQC-Applicator 2-878592-2	734531-1	4.5	6.8	9.1	37.5
	962928-1	G	962929-1	CuNiSi													

STRIP FORM: WIRE CRIMP Drahtcrimp — INSUL.-CRIMP Isol.-Crimp — Bandware
LOOSE PIECE: WIRE CRIMP Drahtcrimp — INSUL.-CRIMP Isol.-Crimp — Einzelteil Streng
WIRE CRIMP HEIGHT CH Drahtcrimp-Höhe CH
CRIMP DIMENSION (mm) Crimpabmessungen (mm)
APPLICATION TOOL Anschlag-WKZ
HAND TOOL Handcrimp
EXTRACTION TOOL Ausdrückwerkzeug No.: 726552

THIS DRAWING IS A CONTROLLED DOCUMENT.
TOLERANCES UNLESS OTHERWISE SPECIFIED:
DIMENSIONS: mm
ANGLES ±2°
MATERIAL SEE TABLE
FINISH SEE TABLE

DRN M. Pleitschiffer 31JUL2000
CHK V. Hunn 31JUL2000
APVD M. Bleicher 31JUL2000
PRODUCT SPEC 108-18047
APPLICATION SPEC 114-18075
WEIGHT -

TE Connectivity

NAME MAXI POWER TIMER FOR 1.2MM TABS
MAXI POWER TIMER für 1.2mm TABs

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-1355050 | RESTRICTED TO -
CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV A5

4005 13/111
Pro/ENGINEER DRAWING

Downloaded from Elcodis.com electronic components distributor