


PART NO.		'A'		'B'	
5837655-5	36.00	914.0	.38	9.7	
5837655-7	6.00	152.4	.38	9.7	
5837655-9	20.00	508.0	.38	9.7	
1-5837655-0	18.00	457.2	.50	12.7	
1-5837655-1	12.00	304.8	.38	9.7	
1-5837655-3	48.00	1219.2	.38	9.7	
1-5837655-8	26.00	660.4	.38	9.7	
3-5837655-6	11.00	279.4	.25	6.3	
4-5837655-5	10.00	254.0	.38	9.7	
4-5837655-7	8.00	203.2	.38	9.7	
6-5837655-8	78.75	2000.3	.38	9.7	

REV	DATE	DESCRIPTION	BY	APP
A		RELEASED PER ECO-05-001846		AA DE

- △ TOLERANCE OF LEAD LENGTH:
UP TO 24 INCHES [609.6] = ±.12 [±3.0]
24 INCHES [609.6] & UP = 1%
- 2. MARKED PER MIL-STD-130.
- △ INSULATION CUT TO LENGTH 'B' BUT NOT REMOVED.
- 4. TO MATE WITH AMP LGH-1 RECEPTACLE WITH .88 BARREL DEPTH.
- 5. OPERATING VOLTAGE: 20 KVDC AT 0 TO 70,000 FEET, -55°C TO 125°C.

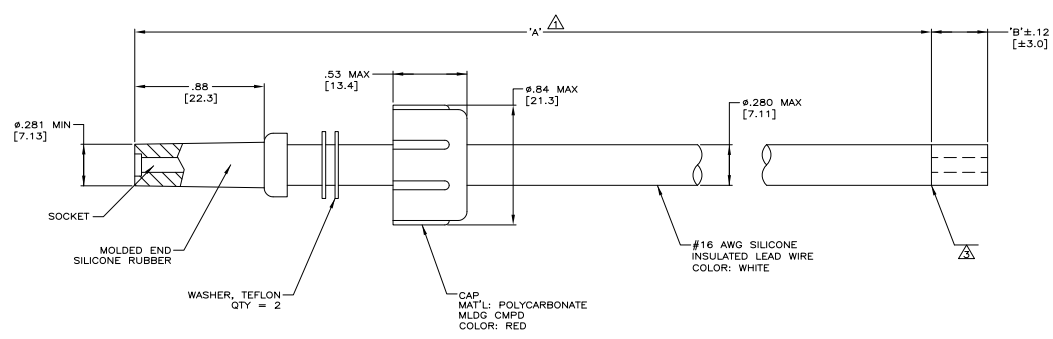

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE: 10-JAN-83	BY: J. HANDESON	APP: [Signature]	REV: 1	DATE: 10-JAN-83	BY: J. HANDESON	APP: [Signature]	REV: 1	DATE: 10-JAN-83	BY: J. HANDESON	APP: [Signature]	REV: 1
DESIGNER:	J. HANDESON	DATE:	10-JAN-83	BY:	J. HANDESON	APP:	[Signature]	REV:	1	DATE:	10-JAN-83	BY:	J. HANDESON
CHKD:	[Signature]	DATE:		BY:	[Signature]	APP:	[Signature]	REV:		DATE:		BY:	[Signature]
DATE:		DATE:		DATE:		DATE:		DATE:		DATE:		DATE:	
SIZE:	A1	DATE:	00779	DATE:	05837655	DATE:		DATE:		DATE:		DATE:	
REV:	3.1	DATE:		DATE:		DATE:		DATE:		DATE:		DATE:	