


THE DRAWING IS UNAPPROVED		REVISED FOR VERIFICATION	
DATE	BY	DESCRIPTION	APPROVED
06-05-00	AA	RELEASED PER ECO-05-001846	DE

PART NO.	A'	B'
5863701-5	36.00 [914.4]	.38 [9.7]
5863701-8	24.00 [609.6]	.38 [9.7]
1-5863701-1	12.00 [304.8]	.38 [9.7]
1-5863701-3	48.00 [1219.2]	.38 [9.7]
1-5863701-9	16.00 [406.4]	.38 [9.7]
6-5863701-4	30.00 [762.0]	.38 [9.7]

REV	DATE	DESCRIPTION	BY	APP
1	06-05-00	RELEASED PER ECO-05-001846	AA	DE

- 1. TOLERANCE OF LEAD LENGTH:
UP TO 24 INCHES [609.6] = ±.12 [±3.0]
24 INCHES [609.6] & UP = 1%
- 2. MARKED PER MIL-STD-130.
- 3. INSULATION CUT TO LENGTH 'B' BUT NOT REMOVED.
- 4. TO MATE WITH AMP LGH-1 RECEPTACLE WITH .88 BARREL DEPTH.
- 5. OPERATING VOLTAGE: 20 KVDC AT 0 TO 70,000 FEET, -55°C TO 125°C.

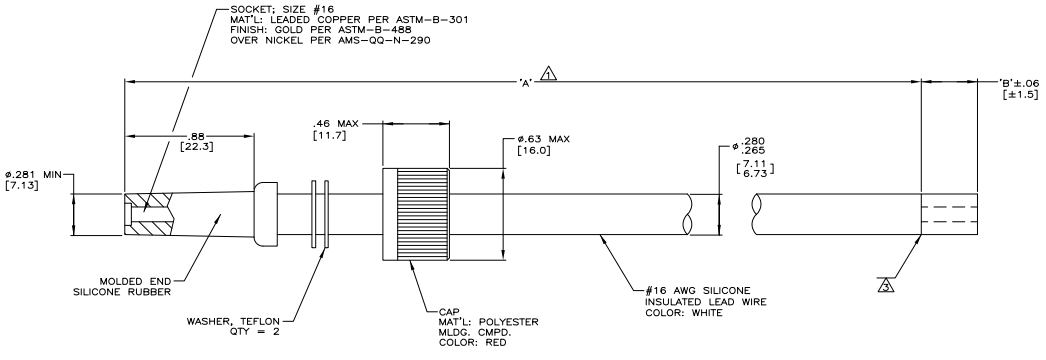

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE: 02-JAN-83	BY: J. HANDESON	APP: [Signature]	REV: 02-JAN-83	DATE: 02-JAN-83	BY: J. HANDESON	APP: [Signature]	REV: 02-JAN-83	DATE: 02-JAN-83	BY: J. HANDESON	APP: [Signature]	REV: 02-JAN-83
DESIGNER: [Signature]		CHECKED: [Signature]		DRAWN: [Signature]		MATERIALS: [Signature]		TESTING: [Signature]		FINISHING: [Signature]		REWORK: [Signature]	
MATERIALS: [Signature]		TESTING: [Signature]		FINISHING: [Signature]		REWORK: [Signature]		CUSTOMER DRAWING		DATE: 01-07-79		REV: 3.1	