

4

3


2

1

THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION			
COPYRIGHT N/A BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.				- N/A -			
PART NO.	A	B	REMARKS				
839564-1	12.00 [304.8]	.38 [9.7]	△				
839564-2	24.00 [609.6]	.38 [9.7]	△				
839564-3	4.50 [114.3]	.38 [9.7]	△				
839564-4	6.50 [165.1]	.38 [9.7]	△				
839564-5	18.00 [457.2]	-	△	OBSOLETE			
839564-6	17.00 [431.8]	-	△	OBSOLETE			
839564-7	15.00 [381.0]	.38 [9.7]	△				
839564-8	60.00 [1524.0]	-	△				
839564-9	120.00 [3048.0]	.38 [9.7]	△	OBSOLETE			
1-839564-0	96.00 [2438.4]	.38 [9.7]	△	OBSOLETE			
1-839564-1	144.00 [3657.6]	.38 [9.7]	△				
1-839564-2	300.00 [7620.0]	.38 [9.7]	△	OBSOLETE			
1-839564-3	48.00 [1219.2]	.38 [9.7]	△				
1-839564-4	72.00 [1828.8]	.38 [9.7]	△				
1-839564-5	1575.00 [40005.0]	.38 [9.7]	△	OBSOLETE			
1-839564-6	420.00 [10668.0]	.38 [9.7]	△	OBSOLETE			
1-839564-7	118.00 [2997.2]	.38 [9.7]	△				
1-839564-8	6.00 [152.4]	.38 [9.7]	△				
1-839564-9	36.00 [914.4]	.38 [9.7]	△				
2-839564-0	240.00 [6096.0]	.38 [9.7]	△				
2-839564-1	394.00 [10007.6]	.38 [9.7]	△				
2-839564-2	984.00 [24993.6]	.38 [9.7]	△	OBSOLETE			
2-839564-3	19.00 [482.6]	.38 [9.7]	△	OBSOLETE			
2-839564-4	10.00 [254.0]	.38 [9.7]	△	OBSOLETE			
2-839564-5	108.00 [2743.2]	.38 [9.7]	△	OBSOLETE			
2-839564-6	78.75 [2000.2]	.38 [9.7]	△				
2-839564-7	35.00 [889.0]	.38 [9.7]	△	OBSOLETE			
2-839564-8	30.00 [762.0]	.38 [9.7]	△	OBSOLETE			
2-839564-9	18.00 [457.2]	.38 [9.7]	△				
3-839564-0	88.12 [2238.2]	.38 [9.7]	△				
3-839564-1	40.00 [1016.0]	.38 [9.7]	△				
3-839564-2	600.00 [15240.0]	.38 [9.7]	△	OBSOLETE			
3-839564-3	157.50 [4000.5]	.38 [9.7]	△				
3-839564-4	196.88 [5000.8]	.38 [9.7]	△				
3-839564-5	37.40 [950.0]	.38 [9.7]	△	OBSOLETE			
3-839564-6	16.00 [406.4]	.38 [9.7]	△				
3-839564-7	20.00 [508.0]	.38 [9.7]	△				
5-839564-1	12.00 [304.8]	.38 [9.7]	△				
5-839564-2	24.00 [609.6]	.38 [9.7]	△				
5-839564-7	15.00 [381.0]	.38 [9.7]	△				
6-839564-3	48.00 [1219.2]	.38 [9.7]	△				
6-839564-7	118.00 [2997.2]	.38 [9.7]	△				
6-839564-9	36.00 [914.4]	.38 [9.7]	△				
7-839564-0	240.00 [6096.0]	.38 [9.7]	△				
7-839564-1	394.00 [10007.6]	.38 [9.7]	△				
7-839564-6	78.75 [2000.2]	.38 [9.7]	△				
8-839564-0	88.12 [2238.2]	.38 [9.7]	△				
8-839564-1	40.00 [1016.0]	.38 [9.7]	△				
8-839564-3	157.50 [4000.5]	.38 [9.7]	△				
8-839564-4	196.88 [5000.8]	.38 [9.7]	△				

LOC	DIST	REV	DESCRIPTION	DATE	BY	APP'D
DF	SO					
		AC	REVISED PER ECO-08-026029	13NOV06	CT	SG

- △1 TOLERANCE OF LEAD LENGTH:
UP TO 24 INCHES [609.6] = ±.12 [3.0]
24 INCHES [609.6] & UP = ±1%
- 2 MARKED PER MIL-STD-130.
- 3 TO MATE WITH AMP LGH-2
RECEPTACLE WITH 1.43 [36.3] BARREL DEPTH.
- 4 OPERATING VOLTAGE: 30 KVDC AT 0 TO 70,000 FEET,
-55°C TO +125°C.
- △5 PIGTAIL IS SOLDER DIPPED.
- △6 INSULATION CUT, BUT NOT REMOVED.

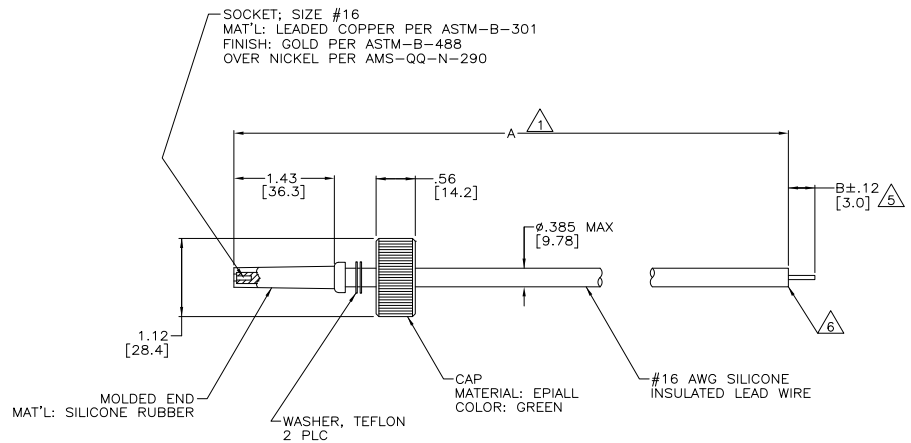

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN	15-FEB-93	Tyco Electronics Corporation	
DIMENSIONS: INCHES (MM)		DR	C. THOMAS	Harrisburg, PA 17105-3608	
OTHER DIMENSIONS: OTHER UNITS (SEE CALLOUTS)		CHK	S. GLATFELTER	Tyco Electronics	
MATERIAL		APP'D	S. GLATFELTER	LEAD ASSY	
FINISH		PRODUCT SPEC		SINGLE END	
SEE CALLOUTS		APPLICATION SPEC		LGH-2	
SEE CALLOUTS		WEIGHT		SIZE	CAGE CODE (DRAWING NO)
SEE CALLOUTS		REVISION		A2	00779 C-839564
SEE CALLOUTS		CUSTOMER DRAWING		SCALE	1:1 SHEET 1 of 1 REV AC

AMP 1471-9 REV 31MM2000

839564

A