


DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

PROD		LOC	DIST	REVISIONS						
4032	DF	50	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD	
						N	ADD -28 & REDRAW PER DF-3848	CCT	9-90	DE
						P	REACTIVATE 2--5; DF-6614	CT	8-92	SG
						R	REACTIVATE -6; DF-6670	CT	9-92	SG
						5	REV PER 0600-8002-98 JB		02-15-99	ML

PART NO.	A	
846291-1	12.00	[304.8]
846291-2	16.00	[406.4]
846291-3	24.00	[609.6]
846291-4	36.00	[914.4]
846291-5	96.00	[2438.4]
846291-6	72.00	[1828.8]
846291-7	60.00	[1524.0]
846291-8	7.00	[177.8]
846291-9	8.50	[215.9]
1-846291-0	10.00	[254.0]
1-846291-1	18.00	[457.2]
1-846291-2	396.00	[10058.4]
1-846291-3	15.00	[381.0]
1-846291-4	8.00	[203.2]
1-846291-5	9.00	[228.6]
1-846291-6	20.00	[508.0]
1-846291-7	79.00	[2006.6]
1-846291-8	30.00	[762.0]
1-846291-9	23.50	[596.9]
2-846291-0	17.00	[431.8]
2-846291-1	787.00	[19989.8]
2-846291-2	80.00	[2032.0]
2-846291-3	10.25	[260.3]
2-846291-4	137.00	[3479.8]
2-846291-5	14.00	[355.6]
2-846291-6	40.00	[1016.0]
2-846291-7	48.00	[1219.2]
2-846291-8	236.25	[6000.7]

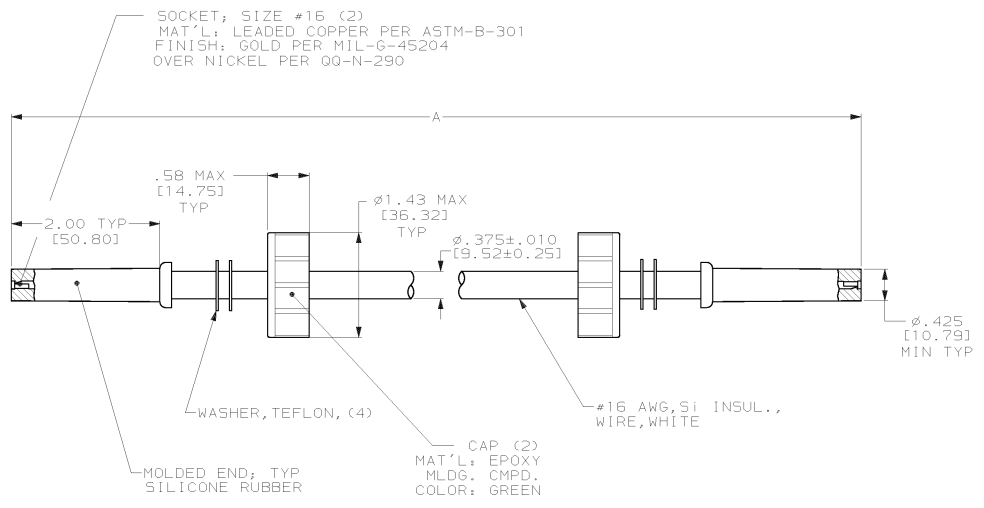

⚠ TOLERANCE OF LEAD LENGTH:  
 UP TO 24 INCHES [609.6] = ±.12 [±3.0]  
 24 INCHES [609.6] & UP = ±1%

- MARKED PER MIL-STD-130.
- OPERATING VOLTAGE: 50 KVDC AT 0 TO 70,000 FEET, -55°C TO 125°C.
- TO MATE WITH WITH AMP LGH-4 RECEPTACLE WITH 2.00 [50.80] BARREL DEPTH.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON: 2 PLC DEC ±.02 [0.51] 3 PLC DEC ± ANGLES ± -	DR 9-27-90 C.C. THOMAS	AMP INCORPORATED Harrisburg, Pa. 17105	
MATERIAL SEE CALLOUTS	CHK 9-28-90 D.EABY		
FINISH SEE CALLOUTS	APPD 9-28-90 C.THOMAS	SIZE C 00779	DRAWING NO. 846291
WEIGHT -	APPLICATION SPEC -	SCALE 1:1	SHEET 1 OF 1

CUSTOMER DRAWING

846291

A

D

B

D

1

2

3

4

3

4

3

4

3

4

3

4

3

4