


NUMBER C-179610  
 3rd ANGLE PROJECTION  
 METRIC

179610-1 : 本 ☒

179610-1 : AS SHOWN

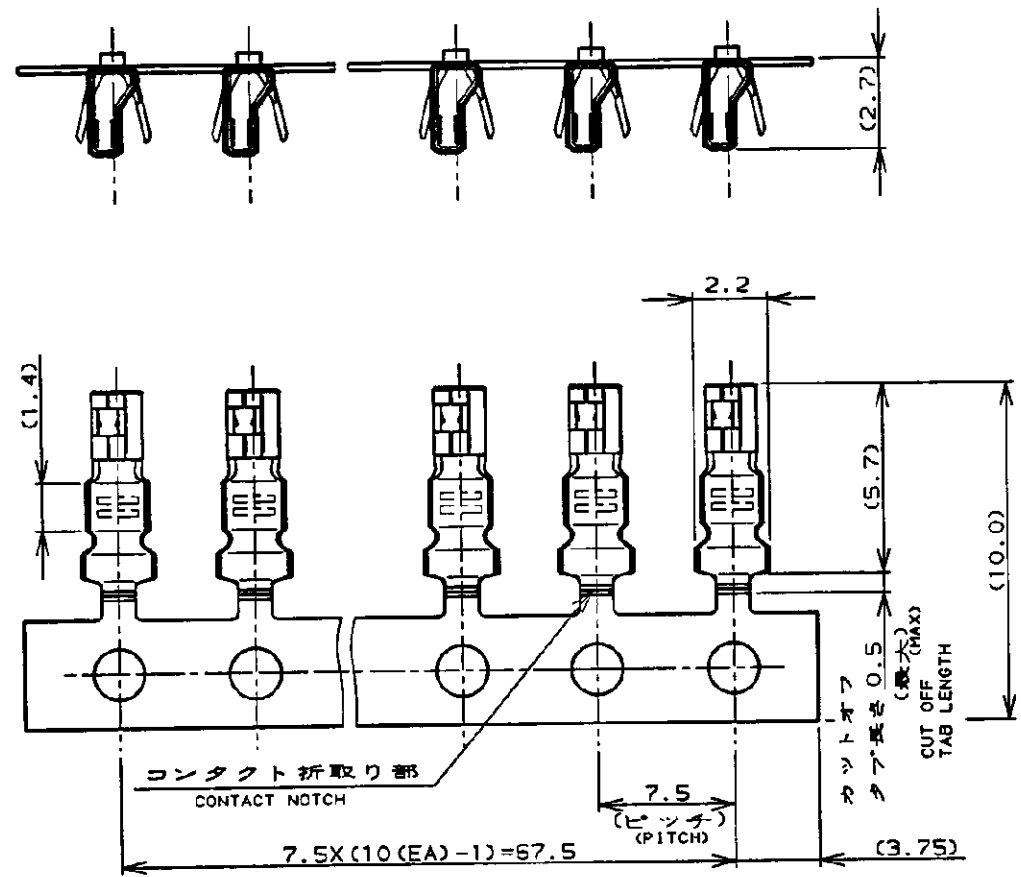

- 注,
- 1 材料 錫めっき清燐青銅 (板厚0.2)
  - 2 通用製品規格, 108-5408
  - 3 取付通用規格, 114-5179
  - 4 連続状端子型番, 179609-1 (折取り部なし)

- NOTES,
- 1 MATERIAL PRE-TIN PHOS.BRO (THK 0.2)
  - 2 PRODUCT SPEC. ; 108-5408
  - 3 APPLICATION SPEC. ; 114-5179
  - 4 STRIP TERMINAL ; 179609-1 (W/O NOTCH)

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

				Copyright © 19__ AMP (Japan) .LTD. ALL RIGHTS RESERVED.		<b>AMP</b> AMP (JAPAN) ,LTD. Tokyo, Japan	
				GENERAL TOLERANCE 0<math>mm</math> ≤ 10 : ±0.2 10<math>mm</math> ≤ 30 : ±0.25 30<math>mm</math> ≤ 100 : ±0.3 ANGLES : ±3°		WIRE RANGE 0.05 -0.12 mm <sup>2</sup> (AWG 30-25)	
				MATERIAL SEE NOTE 1 注 参照		INSULATION DIA. 0.65-1.35mm	
				FINISH SEE NOTE 1 注 参照			
0	RELEASED	F300-4024-96	TF	SK	1/2%	SCALE	SIZE LOC NUMBER
LTR	REVISION RECORD		DR	CHK	DATE	A	J C-179610
DR.	T. Kato 1/23/96		DE.	T. Kato 1/23/96		NAME CRIMP TYPE II REC. CONTACT (L/P)	
CHK.	S. Kato 1/23/96		APP.	S. Kato 1/23/96		圧着タイプIIリセコンタクト (レラ状) (AMP CTコネクタ 2mmピッチ) (AMP CT CONN.2mm PITCH)	

AMP-J  
REV. 10/'83

CUSTOMER DRAWING