
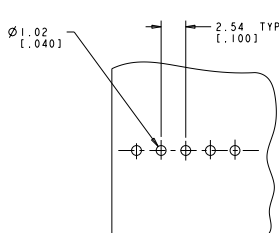
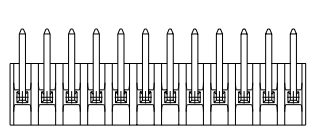
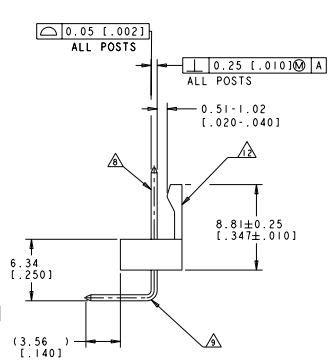
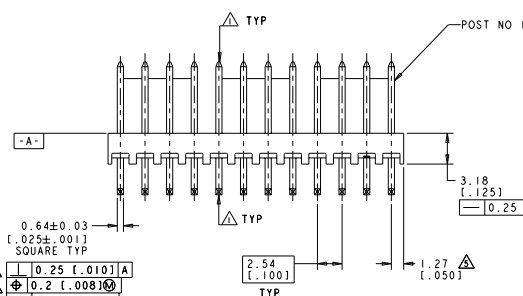


REV	DATE	DESCRIPTION	BY	CHK	APP
E		REVISED PER ECO-11-014383			

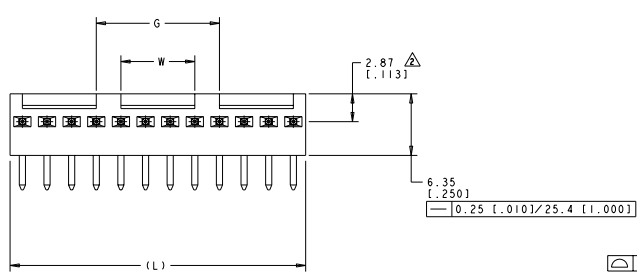

RECOMMENDED MOUNTING HOLE PATTERN
 FOR 1.57±0.20 [0.062±0.008] THICK P.C. BOARD

- △ POST WITHSTAND 13 NEWTONS (3 LBS) MIN AXIAL FORCE IN DIRECTION SHOWN WITHOUT DISLODGING.
- △ MEASURED AT [-A-].
- 3. PARTS COMPLY WITH SOLDERABILITY SPEC 109-11-2.
- △ MATERIAL: HEADER - PBT GLASS FILLED, BLACK. POST - COPPER FILLED (SEE NOTES 8, 9, & 13 FOR PLATING.)
- △ COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
- △ POSTS TO BE MEASURED WHEN STRIP HELD FLAT.
- 7. DIMENSIONS IN BRACKETS ARE IN INCHES.
- △ PLATING: GOLD PLATE AREA, 0.00076 [0.00030] GOLD OR 0.00008 [0.00003] MIN GOLD FLASH OVER 0.00068 [0.00027] PALLADIUM NICKEL, PER TE CONNECTIVITY'S DISCRETION, ALL SIDES, OVER NICKEL UNDERPLATE, 0.00127 [0.00050] MIN, ALL SIDES AND ENTIRE LENGTH OF POST.
- △ BRIGHT TIN/LEAD (93/7) PLATE AREA, 0.00381-0.00889 [0.000150-.000350] THICK, ALL FOUR SIDES, 3.56 [0.140] MIN.
- △ TOLERANCES APPLY TO SOLDER SIDE OF BOARD.
- △ ONE HOLE MAY BE UNDERSIZED 0.81-0.90 [0.032-.035] DIAMETER FOR ASSEMBLY RETENTION DURING PROCESSING.
- △ AMP LOGO, UL AND CSA TRADEMARKS TO APPEAR ON THIS SURFACE.
- △ MATTE TIN PLATE AREA, 0.00381-0.00889 [0.000150-.000350] THICK, ALL FOUR SIDES, 3.56 [0.140] MIN.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

7.62 [0.300]	12.70 [0.500]	30.48 [1.200]	12	4-647629-2
-	10.16 [0.400]	27.94 [1.100]	11	4-647629-1
-	7.62 [0.300]	25.40 [1.000]	10	4-647629-0
-	5.08 [0.200]	22.86 [0.900]	9	3-647629-9
-	-	20.32 [0.800]	8	3-647629-8
-	-	17.78 [0.700]	7	3-647629-7
-	-	15.24 [0.600]	6	3-647629-6
-	-	12.70 [0.500]	5	3-647629-5
-	-	10.16 [0.400]	4	3-647629-4
-	-	7.62 [0.300]	3	3-647629-3
-	-	5.08 [0.200]	2	3-647629-2
7.62 [0.300]	12.70 [0.500]	30.48 [1.200]	12	1-647629-2
-	10.16 [0.400]	27.94 [1.100]	11	1-647629-1
-	7.62 [0.300]	25.40 [1.000]	10	1-647629-0
-	5.08 [0.200]	22.86 [0.900]	9	647629-9
-	-	20.32 [0.800]	8	647629-8
-	-	17.78 [0.700]	7	647629-7
-	-	15.24 [0.600]	6	647629-6
-	-	12.70 [0.500]	5	647629-5
-	-	10.16 [0.400]	4	647629-4
-	-	7.62 [0.300]	3	647629-3
-	-	5.08 [0.200]	2	647629-2

- △ SUPERCEDED BY 4-647629-2
- △ SUPERCEDED BY 4--1
- △ SUPERCEDED BY 4--0
- △ SUPERCEDED BY 3--9
- △ SUPERCEDED BY 3--8
- △ SUPERCEDED BY 3--7
- △ SUPERCEDED BY 3--6
- △ SUPERCEDED BY 3--5
- △ SUPERCEDED BY 3--4
- △ SUPERCEDED BY 3-647629-3
- △ OBSOLETE

W	G	L	NO OF POSN	PART NO
7.62 [0.300]	12.70 [0.500]	30.48 [1.200]	12	4-647629-2
-	10.16 [0.400]	27.94 [1.100]	11	4-647629-1
-	7.62 [0.300]	25.40 [1.000]	10	4-647629-0
-	5.08 [0.200]	22.86 [0.900]	9	3-647629-9
-	-	20.32 [0.800]	8	3-647629-8
-	-	17.78 [0.700]	7	3-647629-7
-	-	15.24 [0.600]	6	3-647629-6
-	-	12.70 [0.500]	5	3-647629-5
-	-	10.16 [0.400]	4	3-647629-4
-	-	7.62 [0.300]	3	3-647629-3
-	-	5.08 [0.200]	2	3-647629-2

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 13-DEC-2002
 DRAWING NO: 020000040000
 REV: 0001
 MTA-100 HEADER ASSEMBLY, FRICION LOCK, .025 SQUARE, RIGHT ANGLE, FRONT BEND POST, .000030 GOLD
 SIZE: CASE CODE DRAWING NO: A100779
 CUSTOMER DRAWING: 647629

