
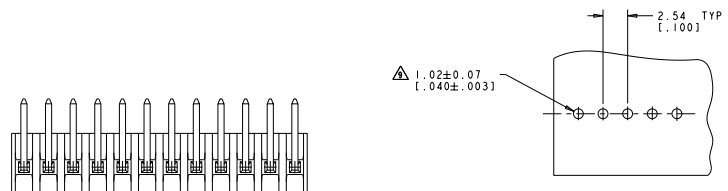
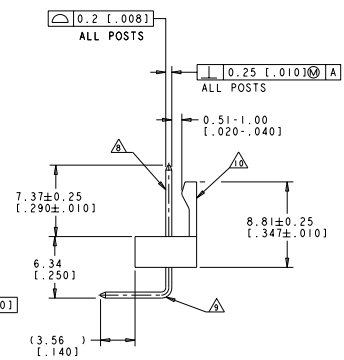
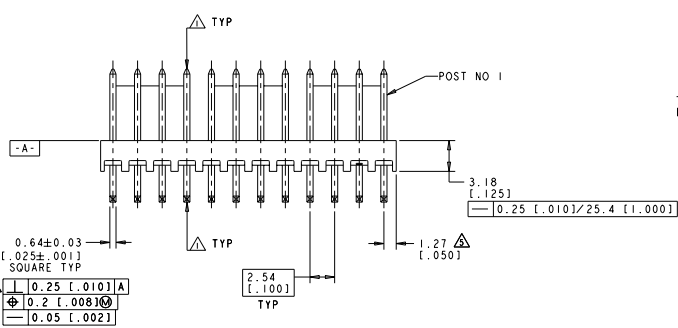


REVISED		REVISIONS			
CM	00	REVISED PER ECO-11-011461	DATE	BY	CHK

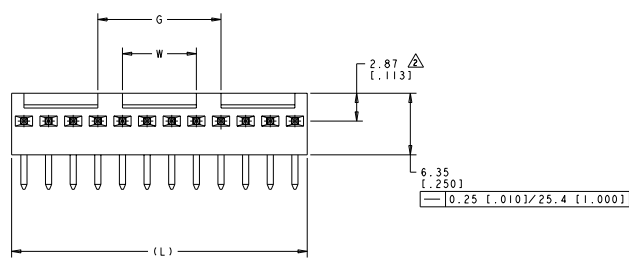

RECOMMENDED MOUNTING HOLE PATTERN
 FOR 1.57 ± 0.20 [0.062 ± 0.008] THICK P.C. BOARD

- △ POST WITHSTAND 13 NEWTONS (3 LBS) MIN AXIAL FORCE IN DIRECTION SHOWN WITHOUT DISLODGING.
- △ MEASURED AT -A-.
- 3. PARTS COMPLY WITH SOLDERABILITY SPEC 109-11-2.
- △ MATERIAL: HEADER - PBT, GLASS FILLED.
 POST - COPPER ALLOY
 PLATING: -2 THRU -12 (93/7) TIN-LEAD PLATED.
 -32 THRU -42 BRIGHT 100% TIN PLATED
- △ COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
- △ POSTS TO BE MEASURED WHEN STRIP HELD FLAT.
- 7. DIMENSIONS IN BRACKETS ARE IN INCHES.
- △ TOLERANCES APPLY TO SOLDER SIDE OF BOARD.
- △ ONE HOLE MAY BE UNDERSIZED 0.81-0.90 [0.032-.035] DIAMETER FOR ASSEMBLY RETENTION DURING PROCESSING.
- △ AMP LOGO, UL, AND CSA TRADEMARKS TO APPEAR ON THIS SURFACE.

7.62 [0.300]	12.70 [0.500]	30.48 [1.200]	12	4-647630-2
-	10.16 [0.400]	27.94 [1.100]	11	4-647630-1
-	7.62 [0.300]	25.40 [1.000]	10	4-647630-0
-	5.08 [0.200]	22.86 [0.900]	9	3-647630-9
-	2.54 [0.100]	20.32 [0.800]	8	3-647630-8
-	-	17.78 [0.700]	7	3-647630-7
-	-	15.24 [0.600]	6	3-647630-6
-	-	12.70 [0.500]	5	3-647630-5
-	-	10.16 [0.400]	4	3-647630-4
-	-	7.62 [0.300]	3	3-647630-3
-	-	5.08 [0.200]	2	3-647630-2
7.62 [0.300]	12.70 [0.500]	30.48 [1.200]	12	1-647630-2
-	10.16 [0.400]	27.94 [1.100]	11	1-647630-1
-	7.62 [0.300]	25.40 [1.000]	10	1-647630-0
-	5.08 [0.200]	22.86 [0.900]	9	647630-9
-	2.54 [0.100]	20.32 [0.800]	8	647630-8
-	-	17.78 [0.700]	7	647630-7
-	-	15.24 [0.600]	6	647630-6
-	-	12.70 [0.500]	5	647630-5
-	-	10.16 [0.400]	4	647630-4
-	-	7.62 [0.300]	3	647630-3
-	-	5.08 [0.200]	2	647630-2
W	G	L	NO OF POSN	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 29-DEC-2002
 DRAWING: MTA-100 HEADER ASSEMBLY, FRONT VIEW, RIGHT ANGLE. FRONT BEND POST, TIN PLATED.
 METRIC: 0.010 INCHES (0.254 MM) SCALE
 MTA-100 HEADER ASSEMBLY, FRONT VIEW, RIGHT ANGLE. FRONT BEND POST, TIN PLATED.
 CUSTOMER DRAWING: A 00779 ©-647630

