

4

3


2

1

THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		- N/A -	
COPYRIGHT N/A BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.					
PART NO.	'A'	'B'	CAP COLOR	REMARKS	
860424-1	12.00 [304.80]	.38 [9.7]	GREEN	△	
860424-2	12.00 [304.80]	.38 [9.7]	RED		OBSOLETE
860424-3	8.00 [203.20]	.38 [9.7]	GREEN	△	
860424-4	10.00 [254.00]	.38 [9.7]	GREEN		
860424-5	10.00 [254.00]	.38 [9.7]	BLACK		OBSOLETE
860424-6	4.75 [120.65]	.25 [6.3]	GREEN		OBSOLETE
860424-7	9.50 [241.30]	.38 [9.7]	RED		OBSOLETE
860424-8	12.00 [304.80]	.38 [9.7]	GREEN		OBSOLETE
860424-9	5.50 [139.70]	-	GREEN		OBSOLETE
1-860424-0	11.25 [285.75]	-	GREEN		OBSOLETE
1-860424-1	10.50 [266.70]	-	GREEN		OBSOLETE
1-860424-2	15.50 [393.70]	.38 [9.7]	GREEN		OBSOLETE
5-860424-4	10.00 [254.00]	.38 [9.7]	GREEN	△	

LOC	DIST	REVISIONS				
DF	SO	P	LR	DATE	MIN	APD
		W	REV PER ECO-05-002582	06-05	AA	DE

- △ TOLERANCE OF LEAD LENGTH:
UP TO 24 INCHES [609.6] = ±.12 [±3.0]
24 INCHES [609.6] & UP = ±1%
- △ AMP INFORMATION MARKED PER MIL-STD-130.
3. TO MATE WITH AMP LGH-1/2
RECEPTACLE WITH .53 [13.5] BARREL DEPTH.
- △ DIGITAL SOLDER DIPPED.
5. OPERATING VOLTAGE: 10 KVDC AT 0 TO 70,000
FEET, -55°C TO 125°C.
- △ LEAD MARKING (PER TABLE) MARKED PER
MIL-STD-130; .08 CHAR.
- △ INSULATION CUT TO LENGTH, BUT NOT REMOVED.

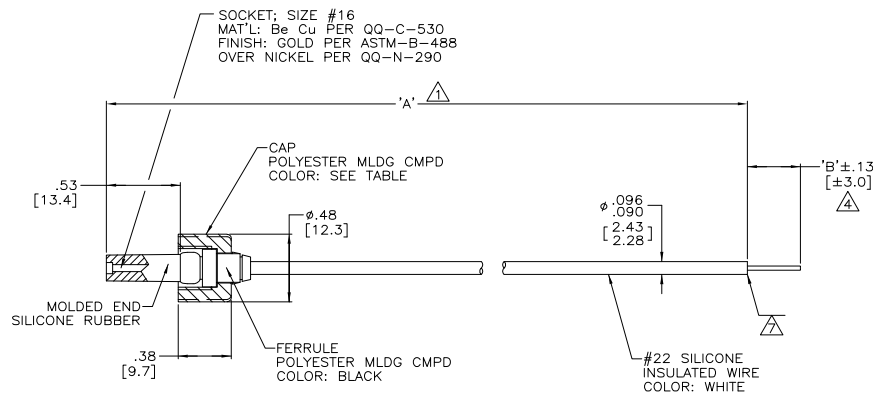

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN	15-MAR-90	Tyco Electronics Corporation
DIMENSIONS: INCHES		DRN	RINEHART	Harrisburg, Pa 17105-3608
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	EABY	
Ø	PLC	APPD	12-NOV-91	
1	PLC	NAME		
2	PLC			
3	PLC			
4	PLC			
ANGLES				
FINISH				
MATERIAL	SEE CALLOUTS	APPLICATION SPEC		LEAD ASSEMBLY, POSITIVE STOP LGH-1/2, SPECIAL SILICONE WIRE (.53 MOLDED END)
FINISH	SEE CALLOUTS	HEIGHT		
		SIZE	A2	00779 C=860424
		RESTRICTED TO		
		CUSTOMER DRAWING	SCALE	2:1 SHEET 1 OF 1 REV W

AMP 1471-9 REV 31MM2000

860424

B

A