

4

3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - N/A  
 © COPYRIGHT N/A BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DST	REVISIONS					
		P	LR	DESCRIPTION	DATE	MIN	APPRO
DF	SO	C		REV PER ECO-05-002584	07-05	AA	DE

1. MARKED PER MIL-STD-130; .09 HIGH CHARS.
2. TO MATE WITH AMP LGH-1/2 RECEPTACLE WITH .53 [13.4] BARREL DEPTH.
3. OPERATING VOLTAGE: 10 KVDC AT 0 TO 70,000 FEET, -55°C TO 125°C.
- △ PIGTAIL IS SOLDER DIPPED. (867963-1 & -2 ONLY)
- △ TOLERANCE OF LEAD LENGTH: UP TO 24 INCHES [609.6] = ±.12 [±3.0] 24 INCHES [609.6] & UP = ±1%
6. SPECIAL HANDLING REQUIREMENTS: PACKAGED ONE ASS'Y PER POLYBAG WITH TAG. TAG INFO:

AMP INC (00779)  
 (AMP P/N)  
 (CUST P/N)  
 QTY (1)  
 DO NOT OPEN  
 UNTIL READY TO USE

△ INSULATION CUT BUT NOT REMOVED. (5-967963-2 ONLY)

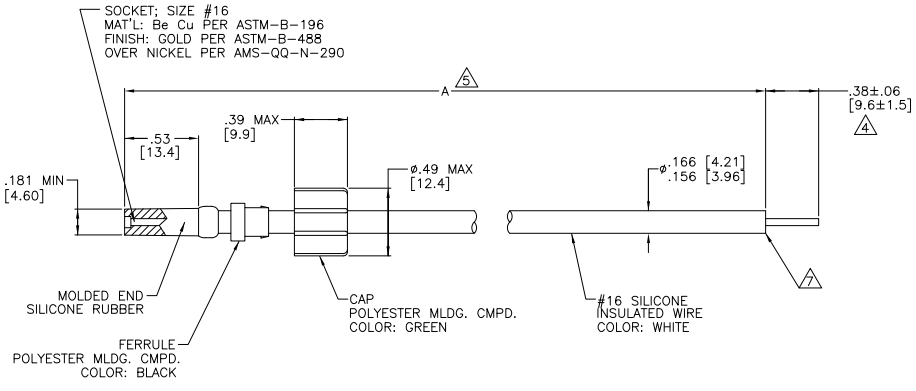

	△	301-0002-270	5.00 [127.0]	5-867963-2
	△	301-0002-270	5.00 [127.0]	867963-2
OBSOLETE	△	301-0002-190	4.00 [101.6]	867963-1
REMARKS		CUSTOMER P/N	A DIM △	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNED BY: C. THOMAS	DATE: 30-JUL-90	BY: Tyco Electronics Corporation
CHECKED BY: D. OPLINGER	DATE: 28-AUG-90	Harrisburg, Pa 17105-3608
APPROVED BY: D. EARY	DATE: 28-AUG-90	
PRODUCT SPEC:		
APPLICATION SPEC:		
WEIGHT:		
MATERIAL: SEE CALLOUTS	FINISH: SEE CALLOUTS	

SIZE: A2 | QTY: 00779 | DRAWING NO: C-867963 | RESTRICTED TO: -

CUSTOMER DRAWING | SCALE: 2:1 | SHEET: 1 OF 1 | REV: C

AMP 1471-9 REV 31MM2000

867963

A