

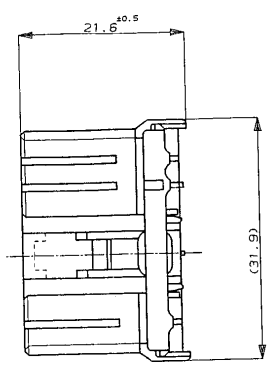


NUMBER C-173851
3rd ANGLE PROJECTION
METRIC

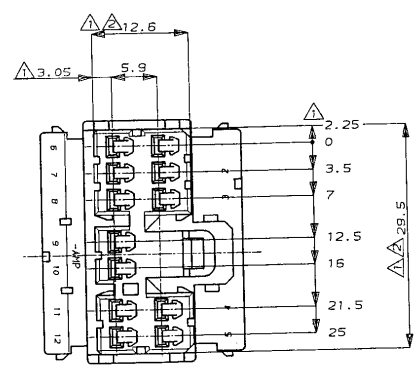

注：
 Δ-A面より 2mmの範囲で測定
 Δ相手ハウジングと所定の機能を満足して嵌合できること
 3 内装するリセアグルコンタクトは型番173630, 173631

NOTE：
 Δ TO BE MEASURED BETWEEN Δ-A AND 2
 Δ TO BE MATE WITH CAP HSG SMOOTHLY
 3 APPLIED CONTACT; P/N 173630 AND 173631

白 (WHITE)	1-173851-1
オレンジ (ORANGE)	173851-8
灰 (GRAY)	173851-6
青 (BLUE)	173851-5
緑 (GREEN)	173851-4
黒 (BLACK)	173851-2
白 (WHITE)	173851-1
色 (COLOR)	型番 (PART NUMBER)

Copyright © 1988 AMP (Japan), LTD. ALL RIGHTS RESERVED.		Copyright © 1988 AMP (Japan), LTD. ALL RIGHTS RESERVED.		AMP AMP (JAPAN), LTD. Tokyo, Japan	
WIRE RANGE	INSULATION DIA	NAME .070シリーズ マルチロック170コネクタ 12極 フラグハウジング (.070SERIES MULTILOCK 170 CONNECTOR, 12POS. PLUG HOUSING)			
E ADD COLOR ITEM 60-38710 F300-0854-94 Y.F. A.T. 5/28/91	MATERIAL PBT	GENERAL TOLERANCE	SIZE	LOC	NUMBER
D ADD COLOR ITEM J-0114 Y.F. A.T. 5/28/91	DR. 10/27/88	0C 10 ± 0.2	A3	J	C-173851
C 変更 REVISD J-12993 T.S. K.A. 1/22/88	CHK. 11/22/88	10C 30 ± 0.25	SCALE	REV.	SHEET
B 再作成: 変更 J-10623 Y.F. MT 1/22/88	APP. 5/28/91	30C 100 ± 0.3	2-1	E	- OF
LTR REVISION RECORD	DR	CHK	DATE	A. TOMITA	

CUSTOMER DRAWING

APP-J REV.10/83