

4


3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCOO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—				
E1	REVISED	ECR-08-031766	05DEC08	SF	KB

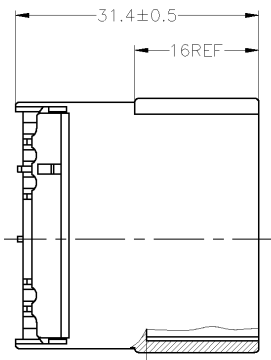

-A-

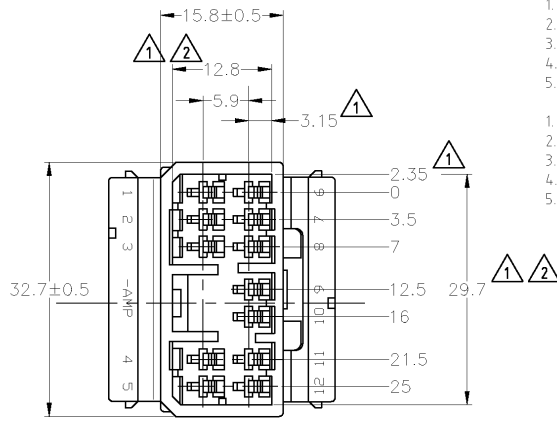

- MUST BE KEPT BETWEEN **-A-** AND 2
 - TO BE MATED WITH PLUG HOUSING SMOOTHLY
 - APPLIED TAB CONTACT; P/N 173633 AND 173645
 - APPLIED PLUG HOUSING; P/N 173851
 - PRODUCT SPEC; 108-5264
- A-** 面より2mmの範囲で測定
 - 相手ハウジングと所定の機能を満足して嵌合できること
 - 内装するタブコンタクトは型番173633、173645
 - 嵌合相手ハウジング型番173851
 - 製品規格：108-5264

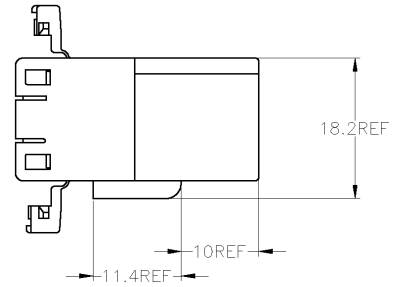

V-2	白 (WHITE)	1-174933-1
HB	オレンジ (ORANGE)	174933-8
	濃灰 (DARK GRAY)	174933-6
	青 (BLUE)	174933-5
	緑 (GREEN)	174933-4
	黒 (BLACK)	174933-2
	白 (WHITE)	174933-1
使用材料難燃グレード (FLAMMABILITY OF MATERIAL)		色 (COLOR) 型番 (PART NUMBER)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: S.FUJITA	05DEC08	Tyco Electronics Corporation Kawasaki, Japan
CHK: K.BETSUI	05DEC08	
APVD: K.BETSUI	05DEC08	NAME: 070 SERIES MULTILOCK CONNECTOR 12 POSITION CAP HOUSING WIRE TO WIRE
PRODUCT SPEC: 108-5264		SIZE: A3
APPLICATION SPEC: —		CAGE CODE: 00779
WEIGHT: —		DRAWING NO: 174933
MATERIAL: PBT	FINISH: —	RESTRICTED TO: —
CUSTOMER DRAWING		SCALE: 2:1
		SHEET: 1 OF 1
		REV: E1

TOLERANCES UNLESS OTHERWISE SPECIFIED:

10 ±	1	= 0.2
30 ±	10	= 0.25
	30	= 0.3
ANGLE		= 3°