THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
J	—

REVISIONS 改訂

P	LTR	DESCRIPTION	DATE	DWN	APVD
	F4	REVISED ECR-11-010934	01JUN11	TS	KB





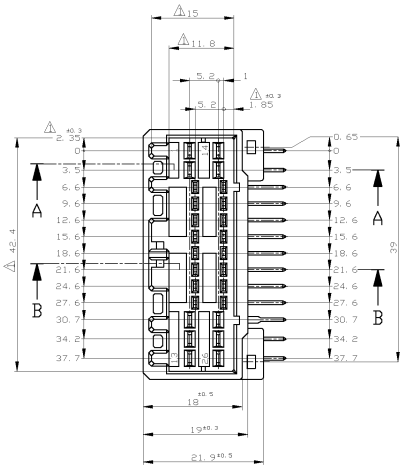

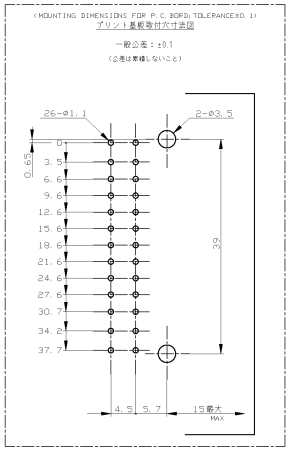





断面 A-A
(SECT. A-A)



断面 B-B
(SECT. B-B)

4	TIN-LEAD / SELECTIVE GOLD (部分金めっき)×2 / PRE-TINNED (錫めっき)×24		⑭, ㉖	GRAY 灰色	4-178811-6
4	TIN-LEAD / SELECTIVE GOLD (部分金めっき)×2 / PRE-TINNED (錫めっき)×24		⑭, ㉖	NATURAL 白色	4-178811-1
3	TIN-LEAD / SELECTIVE GOLD (部分金めっき)×16 / PRE-TINNED (錫めっき)×10		⑪～㉖	BLACK 黒色	3-178811-2
2	TIN-LEAD / SELECTIVE GOLD (部分金めっき)×6 / PRE-TINNED (錫めっき)×24	⑨	⑮, ⑱, ㉔～㉖	GRAY 灰色	2-178811-6
0	PRE-TINNED 錫メッキ×26			YELLOW 黄色	178811-7
0	PRE-TINNED 錫メッキ×26			GRAY 灰色	178811-6
5	SELECTIVE-TIN (MATTE) 部分錫めっき / SELECTIVE GOLD (部分金めっき)×26		①～⑩	GRAY 灰色	178811-3
1	SELECTIVE-TIN (MATTE) 部分錫めっき / SELECTIVE-TIN 錫めっき×26			WHITE 白色	178811-2
0	PRE-TINNED 錫メッキ×26			WHITE 白色	178811-1
△6 MARKING マーキング	SOLDERING SIDE 半田付け部 / CONTACT SIDE 接触部側	POWER CIRCUIT NO. パワー回路	SIGNAL CIRCUIT NO. シグナル回路	HOUSING COLOR ハウジング色	PART NO
	FINISH OF CONTACT コンタクト仕上 (表面)	CIRCUIT NO. OF GOLD PLATED CONTACT 金メッキ端子使用回路番号			

△1 MUST BE KEPT BETWEEN -Z- AND 2.
2. THE MATING PLUG HSG.PART NUMBER: 174516, 917992
3. RECOMMENDED MOUNTING SCREW: 3mm DIA. 6mm LENGTH (MAX.) PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122 (TIGHTENING TORAUE: 0.4N-m (4Kg-cm) MAX)
4. APPLICABLE PRODUCT SPEC NO.: 108-5280, 108-5342
△5 CIRCUIT NUMBER
POWER CIRCUIT NO. ① ～ ⑩
SIGNAL CIRCUIT NO. ⑪ ～ ㉖
△6 INDICATED PREFIX AND ID MARK OF PRODUCT P/N BY HOT MARK

△1 -Z- 面から2mmの範囲で測定
2. 嵌合相手ハウジング型：174516, 917992
3. 推奨取付ねじ：JIS B1115, B1122 タッピングねじ, なべ2種
呼び径3, 長さ6mm以下 (締付けトルク：0.4N-m (4kg-cm) 以下)
4. 適用製品規格番号：108-5280, 108-5342
△5 回路番号：上図参照のこと
パワー回路 ①～⑩
シグナル回路 ⑪～㉖
△6 適用製品型番のプリフィックス及びIDマークを
カラーホットマークにて表示

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位：粍 mm
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差
0 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

GENERAL TOLERANCE
0<✱≤ 10 : ±0.2
10<✱≤ 30 : ±0.25
30<✱≤100 : ±0.3
ANGLES : ±3°

MATERIAL 材料: HOUSING : PBT, CONTACT : BRASS
FINISH 仕上: SEE TABLE 表参照

DWN	M.KADOSAKI	17MAY05
CHK	T.SHINOHARA	17MAY05
APVD	K.BETSUI	17MAY05
PRODUCT SPEC 製品規格		
APPLICATION SPEC 取付適用規格		
WEIGHT		
CUSTOMER DRAWING		

TE Connectivity

NAME 名称: 26Pos CAP HOUSING ASSY 040/070 HYBRID I/O CONNECTOR

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A2	00779	C-178811	—

SCALE 尺度 2:1 | SHEET 1 OF 1 | REV F4

178811

1471-9 (3/11)

Downloaded from Elcodis.com electronic components distributor