THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT — By —
ALL RIGHTS RESERVED

LOC	DIST
J	—

REVISIONS

LTR	DESCRIPTION	DATE	DWN	APVD
H5	REVISED ECR-11-010934	11JUL11	TS	KB



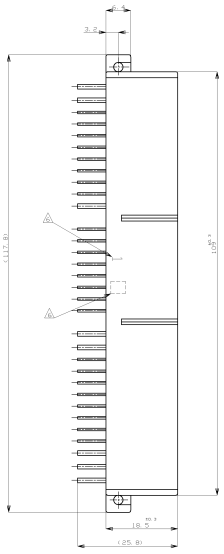

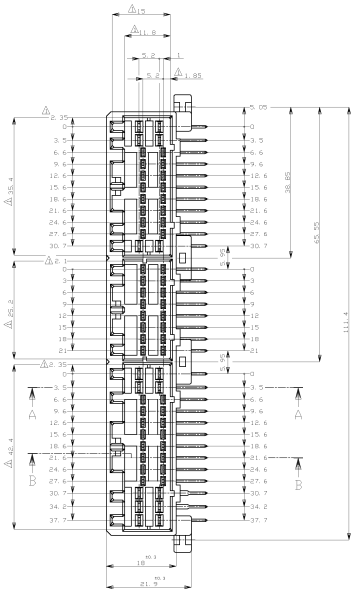

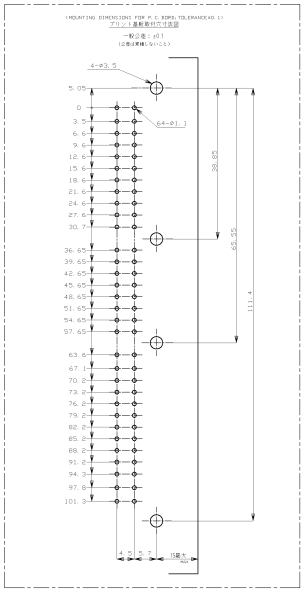





△1 -X- 面から2mmの範囲で測定
2. 保谷精工ハウジング型 174516, 174515, 174514, 917992, 917989, 917981
3. 推奨取付ねじ：JIS B1115, B1112 タッピンねじ, なべ頭
　呼び径3, 長さ5mmまで（締付けトルク：0.4N-m {4kg-cm} 以下）
4. 適用製品規格番号：108-5280, 108-5342
△5 回路番号：
　パワー回路 ①～⑯
　シグナル回路 ⑰～⑳



△6 適用製品型番のプリフィックス及び印マークを
　カラーキャラクターにて表示

1. MUST BE KEPT BETWEEN -X- AND 2
2. THE MATING PLUG HOUSPART NUMBER:174516, 174515, 174514, 917992, 917989, 917981
3. RECOMMENDED MOUNTING SCREW:3mmDIA.6mmLENGTHMAX.)
　PAN HEAD,CLASS 2 TAPPING SCREW SPECIFIED IN JIS
　B1115,B1122)
　(TIGHTENING TORAUE;0.4N-m{4kg-cm} MAX.)
△4 APPLICABLE PRODUCT,SPEC NO.: 108-5280, 108-5342
△5 CIRCUIT NUMBER
　POWER CIRCUIT NO. ①～⑯
　SIGNAL CIRCUIT NO. ⑰～⑳
△6 INDICATED PREFIX AND ID MARK OF PRODUCT P/N BY COLOR HOT MARK

56	SELECTIVE-TIN PLATED	SELECTIVE GOLD + TIN PLATED	N, 16	57~63	WHITE	5-5175138-1
9	TIN-LEAD	SELECTIVE GOLD × 4	-	49~56	YELLOW	9-1745198-7
9	TIN-LEAD	SELECTIVE GOLD × 8	-	49~56	GRAY	9-1745198-8
8	TIN-LEAD	PRE-TIN × 16 SELECTIVE GOLD × 12	-	33, 34, 49~56	YELLOW	8-1745198-7
7	TIN-LEAD	PRE-TIN × 32 SELECTIVE GOLD × 16	-	33~48, 49~56	YELLOW	7-1745198-7
6	TIN-LEAD	PRE-TIN × 48 SELECTIVE GOLD × 9	N, 16	57~63	WHITE	6-1745198-1
5	TIN-LEAD	SELECTIVE GOLD × 24 PRE-TIN × 48	-	17~24, 33~48, 49~56	YELLOW	5-1745198-7
4	TIN-LEAD	SELECTIVE GOLD × 32 PRE-TIN × 32	-	25~32, 33~48, 52, 53	YELLOW	4-1745198-7
3	TIN-LEAD	SELECTIVE GOLD × 52 PRE-TIN × 12	3~16	17~64	YELLOW	3-1745198-7
3	TIN-LEAD	SELECTIVE GOLD ×12 PRE-TIN × 52	3~16	17~64	GRAY	3-1745198-8
2	TIN-LEAD	SELECTIVE GOLD × 48 PRE-TIN × 16	-	17~64	YELLOW	2-1745198-7
2	TIN-LEAD	SELECTIVE GOLD × 48 PRE-TIN × 16	-	17~64	GRAY	2-1745198-8
2	TIN-LEAD	SELECTIVE GOLD × 48 PRE-TIN × 16	-	17~64	WHITE	2-1745198-1
1		PRE-TIN × 64	1~16	17~64	YELLOW	1-1745198-7
1		PRE-TIN × 64	1~16	17~64	GRAY	1-1745198-2
0		PRE-TIN × 64	-	-	YELLOW	1745198-1
0		PRE-TIN × 64	-	-	GRAY	1745198-3

OBSOLETE

△MARKING マーキング	DIFFERENT FROM 相当品の表	PARTS & WIRE 電線部材	POWER CIRCUIT NO. パワー回路	SIGNAL CIRCUIT NO. シグナル回路	△	COLOR 色	PART NUMBER 製品型番
	CONTACT FINISH コンタクト仕上		GOLD PLATED CIRCUIT NO. 金メッキ回路番号				

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN	TITLE/DATE
K. SHINOHARA	
CHK	TITLE/DATE
K. BETSUI	
APVD	TITLE/DATE
K. BETSUI	

TE Connectivity

64POSITION CAP HOUSING ASSEMBLY
040/070 SERIES HYBRID I/O CONNECTOR

PRODUCT SPEC 製品規格書: C SEE NOTE 4
APPLICATION SPEC 用途適用規格:
WEIGHT: —

SIZE	CAGE CODE	DRAWING NO.	RECYCLED TO
A1	00779	C-174518	—

CUSTOMER DRAWING

SCALE	SHEET	REV
2:1	1 OF 1	H5

GENERAL TOLERANCE
0.5< t ≤ 10 : ±0.2
10< t ≤ 30 : ±0.25
30< t ≤ 100 : ±0.3
OTHERS : ±2°

MATERIAL 材料
HOUSING : PBT
CONTACT : BRASS

FINISH 仕上
—

DIMENSIONING 単位: MI

TOLERANCES UNLESS OTHERWISE SPECIFIED 一般公差
0 PLC ± —
1 PLC ± —
2 PLC ± —
3 PLC ± —
4 PLC ± —
ANGLES ± —

4805 (3/11)

Downloaded from Elcodis.com electronic components distributor