

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2011
 (C) COPYRIGHT 2000 ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
C1		REVISED PER ECO-11-005140	05APR2011	RK	HMR

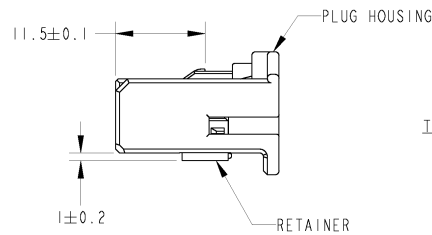


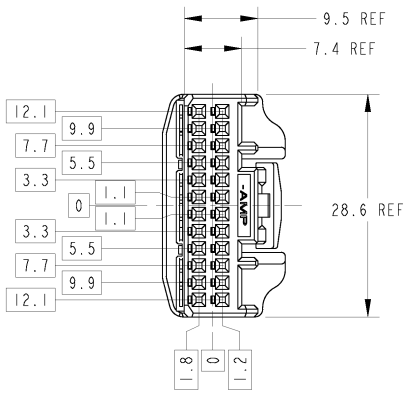


TABLE-1

POS 極数	CAP ASSEMBLY PART NO キャップ 型番
24	1318853-1

TABLE-2

		TERMINAL NO 端子型番	APPLICABLE WIRE RANGE 適用電線
SIGNAL 025	TIN	1123343-1	AVSS/CAVUS 0.3~0.5mm ² AVSSH-f 0.3~0.5mm ² CAVS 0.22~0.5mm ²

PAPER BOX ダンボール	PLASTIC BAG ビニール袋	BLACK △	1318917-2
PAPER BOX ダンボール	PLASTIC BAG ビニール袋	NATURAL △	1318917-1
OUTER 外装	INNER 内装	COLOR	PART NUMBER
PACKING STYLE 梱包形態			

1. RETAINER SHOULD BE SET TO THE PRE- ASSEMBLY POSITION WITHIN THE PLUG HOUSING WHEN SHIPPED TO THE CUSTOMER
2. THE RETENTION LATCH OF THE RETAINER MUST BE OUT SIDE OF PLUG HOUSING WHEN PRE-ASSEMBLY
3. RETAINER RETENTION FORCE FROM HOUSING : 20N MIN
4. INSTRUCTION SHEET NO : 411-5928
5. PART NUMBER OF CAP HOUSING TO BE MATED : SEE TABLE -1
6. APPLIED TERMINAL : SEE TABLE -2
- △ RETAINER IS THE SAME COLOR AS HOUSING.

1. プラグハウジングにリテーナを仮止して出荷する
2. 仮止留リテーナ突起がハウジングの外側に出ていること
3. リテーナの仮止留保持力は 20N 以上
4. 取扱い説明書 NO : 411-5928
5. 適合相手型番は TABLE -1 参照
6. 適用端子は TABLE -2 参照
- △ リテーナはハウジング本体と同色とする。

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 ±0.3	DWN N. YASUDA	08MAR00
	0-PLC ±0.1	CHK N. SAI	10MAR00
	1-PLC ±0.1	APVD N. SAI	10MAR00
MATERIAL PBT	2-PLC ±0.01	NAME N. SAI	025 SERIES 24 POSITION PLUG HOUSING ASSEMBLY
FINISH SEE TABLE-3	3-PLC ±0.001	PRODUCT SPEC 108-5668	SIZE CAGE CODE DRAWING NO A3 00779 C-1318917
	4-PLC ±0.0001	APPLICATION SPEC 114-5250	RESTRICTED TO
	ANGLES ±3.00°	WEIGHT 3.68 g	SCALE 2:1
		CUSTOMER DRAWING	SHEET 1 OF 1 REV C1