THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION: - -
© COPYRIGHT - - ALL RIGHTS RESERVED. By: -

LOC	DIST
J	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
M3	REVISED	ECR-11-010934	11JUL11	TS	KB



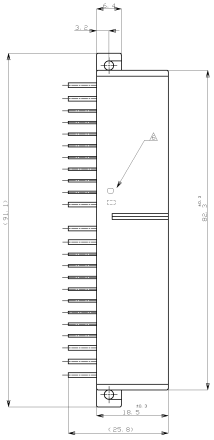

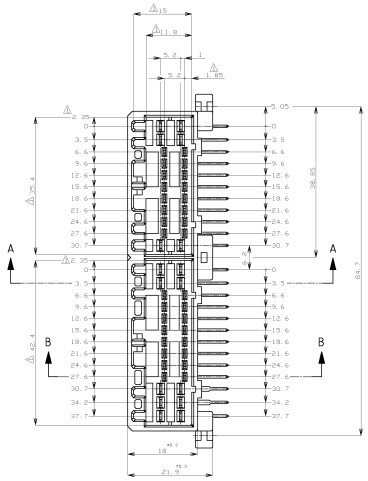

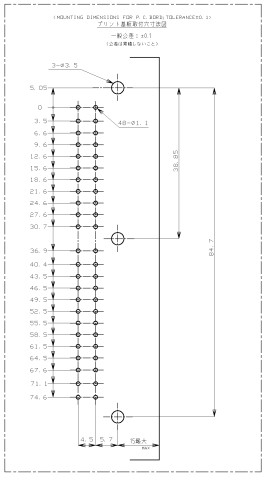





△X 面から2mm内範囲で測定
2. 嵌合相手ハウジング型 174515, 174516, 917989, 917992
3. 推奨取付ねじ：JIS B1115 Bタイプ+3Nm・cm(4kgf・cm)以下)
4. 適用製品規格番号：188-5280, 188-5342
△回路番号：
パワー回路 ①～⑯
シグナル回路 ⑰～㊾

△適用製品型番のプリティクス及び印マークを
カラーホットマークにて表示

△MUST BE KEPT BETWEEN X AND Z
2. THE MATING PLUG HSG.PART NUMBER.174515, 174516, 917989,917992
3. RECOMMENDED MOUNTING SCREW:3mmDIA.6mmLENGTH(MAX.)
PAN HEAD,CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115,B1122
(TIGHTENING TORQUE.39.2N・cm(4kgf・cm)MAX.)
4. APPLICABLE PRODUCT SPEC NO : 108-5280, 108-5342
△CIRCUIT NUMBER
POWER CIRCUIT NO. ①～⑯
SIGNAL CIRCUIT NO. ⑰～㊾
△INDICATED PREFIX AND ID MARK OF PRODUCT P/N BY COLOR HOT MARK

59	SELECTIVE-TIN PLATED	SELECTIVE GOLD × 8	-	19, 28, 29~31, 36	GRAY	9-5174917-6
55	SELECTIVE-TIN PLATED	SELECTIVE-TIN (HEIGHT) ×43 SELECTIVE GOLD × 8	-	33~48	YELLOW	5-5174917-7
52	SELECTIVE-TIN PLATED	SELECTIVE-TIN (HEIGHT) ×43 SELECTIVE GOLD × 5	-	18~24, 27~32, 35, 44	YELLOW	2-5174917-7
9	TIN-LEAD	SELECTIVE GOLD × 8	-	19, 28, 29~31, 36	GRAY	9-1754917-6
8	TIN-LEAD	PRE-TIN × 19 SELECTIVE GOLD × 19	-	19, 28, 22, 28~32, 35, 44	GRAY	8-1754917-6
7	TIN-LEAD	PRE-TIN × 43 SELECTIVE GOLD × 5	-	19, 28, 27, 28, 36	GRAY	7-1754917-6
6	TIN-LEAD	PRE-TIN × 21 SELECTIVE GOLD × 7	-	21~23, 28~31	YELLOW	6-1754917-7
5	TIN-LEAD	PRE-TIN × 43 SELECTIVE GOLD × 8	-	33~48	YELLOW	5-1754917-7
4	TIN-LEAD	PRE-TIN × 43 SELECTIVE GOLD × 16	-	33~40, 43~48	YELLOW	4-1754917-7
3	TIN-LEAD	PRE-TIN × 32 SELECTIVE GOLD × 16	-	17~24, 33~40	WHITE	3-1754917-3
2	TIN-LEAD	PRE-TIN × 32 SELECTIVE GOLD × 15	-	18~24, 27~32, 35, 44	YELLOW	2-1754917-7
0	PRE-TIN × 48		-	-	ORANGE	1754917-8
0	PRE-TIN × 48		-	-	YELLOW	1754917-7
0	PRE-TIN × 48		-	-	GRAY	1754917-6
0	PRE-TIN × 48		-	-	BLUE	1754917-5
0	PRE-TIN × 48		-	-	WHITE	1754917-3

△ MARKING マーキング | ENCLOSURE 封入袋の材質 | CONTACT FINISH コンタクト仕様 | LATCH COLOR 嵌合部の色 | POWER CIRCUIT NO. パワー回路 | SIGNAL CIRCUIT NO. シグナル回路 | △ GOLD PLATED CIRCUIT NO. 金めっき回路番号 | COLOR 色 | PART NUMBER 製品型番

THIS DRAWING IS A CONTROLLED DOCUMENT

DRAWN	OBYOSHI	TE Connectivity	
CHK	K. SHINOHARA		
APVD	K. BETSUI		
DWG APVD	K. BETSUI		
PRODUCT SPEC 製品規格	SEE NOTE 4	48POSITION CAP HOUSING ASSEMBLY 040/070 SERIES HYBRID I/O CONNECTOR	
APPLICATION SPEC 取付基板規格	-		
WEIGHT	—	SIZE A1	DRAWING NO. 1774917
CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1

DIMENSIONS 単位: MM
TOLERANCES UNLESS OTHERWISE SPECIFIED 一般公差
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ± °

GENERAL TOLERANCE
0.(+) ~ 10 : ±0.2
10.(+) ~ 30 : ±0.25
30.(+) ~ 100 : ±0.3
OVER(+) : ±2°

MATERIAL 材質
HOUSING: PBT
CONTACT: BRASS

FINISH 仕上
-

REVISED TO
—

REV M3

Downloaded from Elcodis.com electronic components distributor