

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 COPYRIGHT © 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		RELEASED	26 JUL 2007	S.F	Y.F
		B		REVISED	10 JUL 2008	S.F	Y.F
				ECR-08-014436			


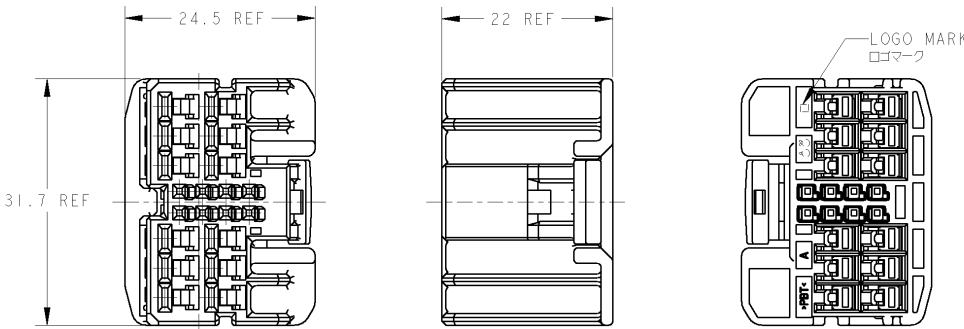


TABLE-1

POS. 極数	CAP HOUSING P/N キャップハウジング型番
20	1939608-1

TABLE-2

TYPE 端子種類	FINISH 仕上げ	APPLICABLE TERMINAL P/N 適用端子型番	APPLICABLE WIRE RANGE 適用電線 (mm ²)
SIGNAL 0.64	TIN	1674311-1	AVSS/AVSSH/AESSX 0.3~0.5 CAVS/CAVUS
POWER 2.3	TIN	1981341-1	AVS/CAVS/AVSS/CAVUS 0.3~0.5 AVX/AEX/ABAVX 0.5f
	TIN	1981341-2	AVS/CAVS/CAVUS 0.85~1.25 AVSS 0.75f, 0.85-2.0



PAPER BOX タンボール箱	PLASTIC BAG ビニール袋	BLACK 黒色	1939605-1
OUTER 外装	INNER 内装	COLOR 色	PART NUMBER 製品型番
PACKING STYLE 梱包形態			

1. プラグハウジングにリテーナを仮保止して出荷される。
2. 嵌合相手型番: TABLE-1参照。
3. 適用端子: TABLE-2参照。

1. RETAINER MUST BE SET TO THE PRE-ASSEMBLY POSITION WITHIN THE PLUG HOUSING WHEN SHIPPED TO THE CUSTOMER.
2. PART NUMBER OF CAP HOUSING TO BE MATED: SEE TABLE-1.
3. APPLICABLE TERMINAL: SEE TABLE-2.

DIMENSIONS: 単位: 英 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 ±0.3 0-PLC ± 1-PLC ±0.5 2-PLC ±0.13 3-PLC ±0.013 4-PLC ±0.004 ANGLES ±1°00'		FINISH 仕上 SEE TABLE		MATERIAL 素材 PBT	
DOWN S. FURUYA 26 JUL 2007 CHK T. KOHNO 26 JUL 2007 APVD Y. FUJIWARA 26 JUL 2007	Tyco Electronics Kawasaki, Japan		Tyco Electronics AMP K.K. Kawasaki, Japan		NAME 0.64/2.3 SERIES 20POS PLUG HOUSING ASSEMBLY		RESTRICTED TO -
PRODUCT SPEC 製品規格 108-78408		APPLICATION SPEC 部品適用規格 114-5329, 114-5411		SIZE A3	CAGE CODE 00779	DRAWING NO 1939605	SCALE 2:1
WEIGHT 8 g				CUSTOMER DRAWING			

AMP 1470-19 REV 31MAR2000

P10/ENGINEER DRAWING