

4

3

2





1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC: J DIST: -

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
C1		REVISED PER ECO-11-005030	22MAR11	RK	HMR

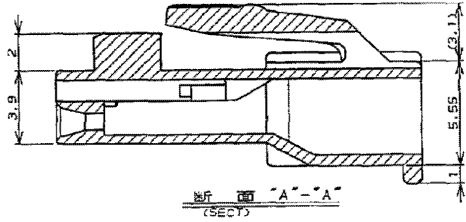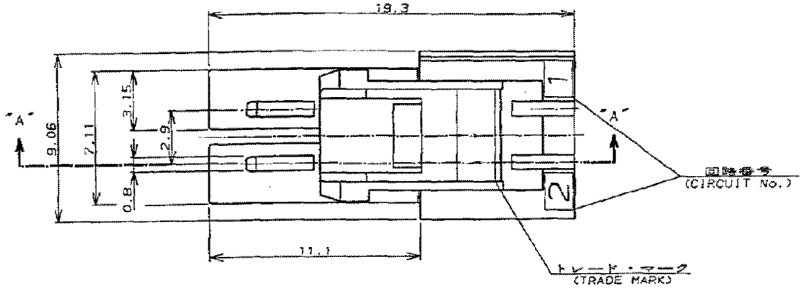

1-176282-1	130°C MAX	PA 4/6 ポリアミド 4/6	NATURAL 自然色	2	1-176271-1
176282-□ 176292-□	105°C MAX	PA 6/6 ポリアミド 6/6	BLACK 黒 BLUE 青 YELLOW 黄 RED 赤 NATURAL 自然色		176271-9 176271-6 176271-4 176271-2 176271-1
MATING CONN. PART NUMBER 嵌合相手型番	TEMPERATURE RATING 定格温度	TYPE 種類	HOUSING COLOR 色	Pos. 極数	PART NUMBER 型番
		MATERIAL 材料			

1. APPLICABLE CONTACT PART NUMBER;  
REC CONTACT: 175152-□ (#20-#16AWG)  
175151-□ (#26-#22AWG)
- △ TO BE USED WITH THE CONTACT WHICH IS RATED 105°C MAX
1. 適用端子型番;  
リセコンタクト: 175152-□ (#20-#16AWG)  
175151-□ (#26-#22AWG)
- △ 適用コンタクトの使用温度は最大105°C

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: M. SHINDO 08NOV1989  
CHK: Y. FUJITA 08NOV1989  
APPV: Y. FUJITA 08NOV1989

NAME: AMP UNIVERSAL POWER CONN.  
3.96mm PITCH PLUG HOUSING 2 Pos. (SGL ROW)  
AMP ユニバーサルパワーコネクタ 2極 3.96mmピッチ キャップハウジング

PRODUCT SPEC: 108-5302  
APPLICATION SPEC

SIZE: A3 CAGE CODE: 00779 DRAWING NO: 176271

WEIGHT: —

MATERIAL: SEE TABLE

FINISH: —

ANGLES: ±3°

RESTRICTED TO: —

CUSTOMER DRAWING

SCALE: NTS SHEET: 1 OF 1 REV: C1