

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	-	P	LTR	DESCRIPTION	DATE	DWN	AP/D
		D1		REVISED PER ECO-11-005030	23MAR11	RK	HMR

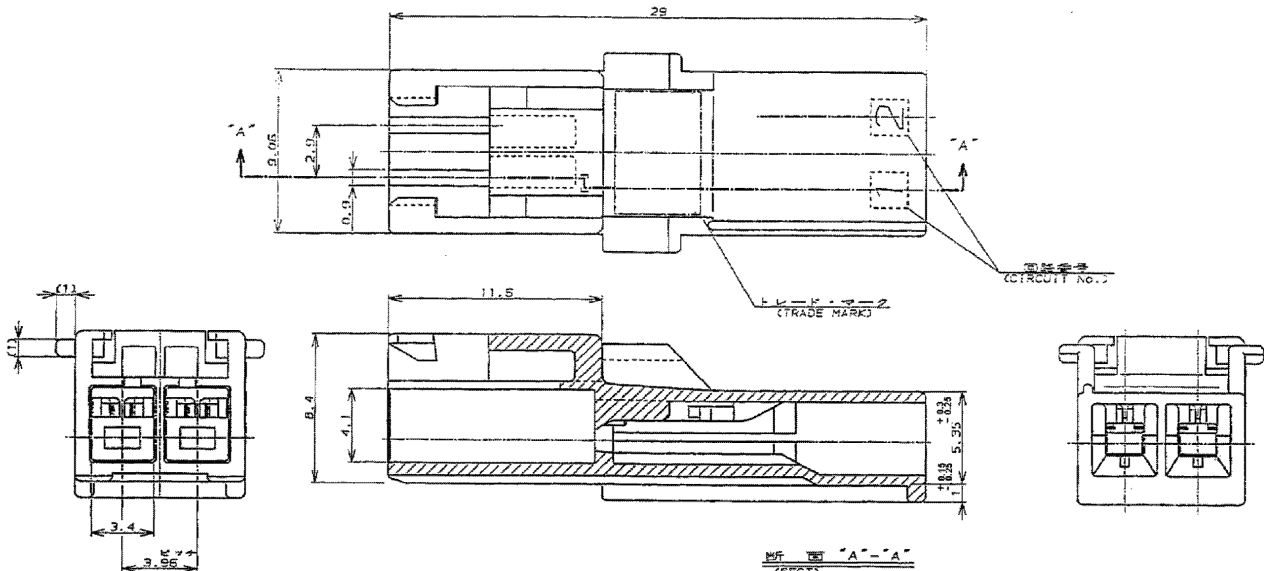

断面 "A-A"
(SECT)

1-176271-1	130°C MAX	PA 4/6 ポリアミド 4/6	NATURAL 自然色	1-176282-1	
176271-□	105°C MAX	PA 6/6 ポリアミド 6/6	BLACK 黒	176282-9	
			BLUE 青	176282-6	
			YELLOW 黄	176282-4	
			RED 赤	176282-2	
		NATURAL 自然色		176282-1	
MATING CONN. PART NUMBER 嵌合相手型番	TEMPERATURE RATING 定格温度	TYPE 種類	HOUSING COLOR 色	Pos. 極数	PART NUMBER 型番
MATERIAL 材料					

1. APPLICABLE CONTACT PART NUMBER;
 TAB CONTACT: 175150-□ (#20-#16AWG)
 175149-□ (#26-#22AWG)
- △ TO BE USED WITH THE CONTACT WHICH IS RATED 105°C MAX
1. 適用端子型番;
 リセコンタクト: 175150-□ (#20-#16AWG)
 175149-□ (#26-#22AWG)
- △ 適用コンタクトの使用温度は最大105°C

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: ≤ 10 ±0.2 $10 < \leq 30$ ±0.25 $30 <$ ±0.3	DWN Y. NARISAWA 19NOV1990 CHK Y. FUJITA 19NOV1990 APVD N. ONOUE 20NOV1990	NAME AMP UNIVERSAL POWER CONN. 3.96mm PITCH CAP HOUSING 2 Pos. (SGL ROW) AMP ユニバーサルパワーコネクタ 2極 3.96mmピッチ キャップハウジング
MATERIAL SEE TABLE	ANGLES FINISH	PRODUCT SPEC 108-5302 APPLICATION SPEC	SIZE CAGE CODE DRAWING NO A3 00779 C-176282
		WEIGHT	RESTRICTED TO

RESTRICTED CUSTOMER SCALE NTS SHEET 1 of 1 REV D1