

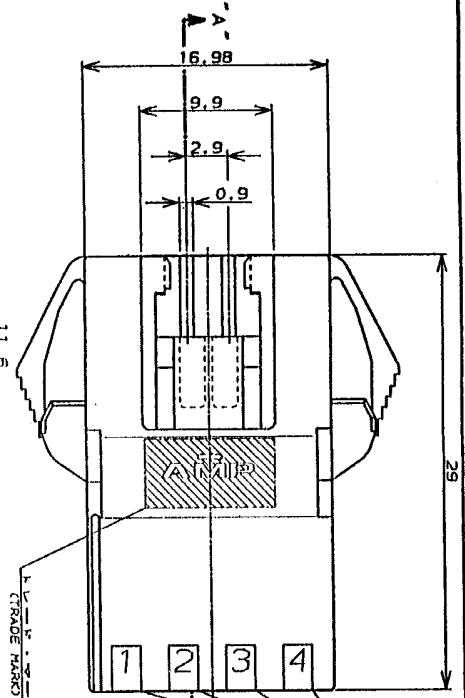
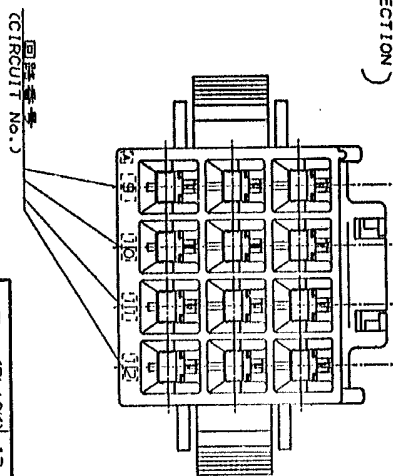
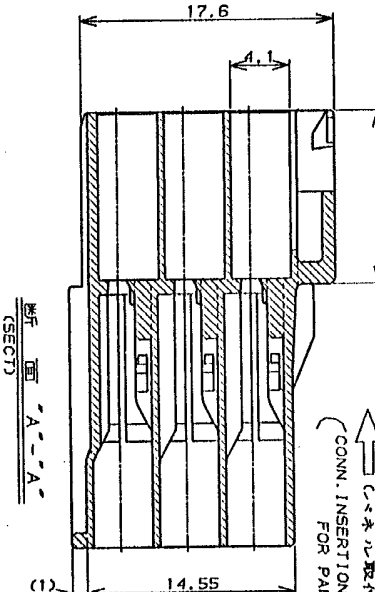


- 注:
1. 適用製品規格: 108-5302
 2. 適用コネクタ型番:
コネクタ: 175150-1(φ20-15A)G
175149-1(φ26-22A)G
 3. 適合標準型製品型番:
プラグ: 175278-1
コネクタ: 175152-1(φ20-15A)G
175151-1(φ26-22A)G
 4. 取扱説明書: IS-503J
 5. 適用パネル厚さ: 0.8-2.0 (F16 16mm)
 6. 適用パネルの場合、日本での取付方向はパネル取付方向にしてください。
 7. プラグとコネクタの適合、穴開け加工は取扱説明書をご覧ください。

NOTES

1. PRODUCT SPEC: 108-5302
2. APPLICABLE CONTACT P/N
TAG CONTACT: 175150-1(φ20-15A)G
175149-1(φ26-22A)G
3. MATING CONN. P/N
PLUG HS6: 175278-1
REC CONTACT: 175152-1(φ20-15A)G
175151-1(φ26-22A)G
4. INSTRUCTION SHEET: IS-503J
5. APPLICABLE PANEL THICKNESS: 0.8-2.0 (SEE FIG. 1)
6. INSERT CONN. FROM PRESS DIRECTION SIDE FOR RETAIL PANEL.
7. EDGE OF THICKNESS MAY MUST NOT ROUND FOR HOLED PANEL.

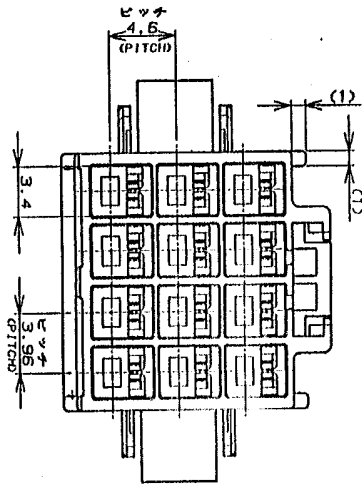

パネル取付寸法 FIG. 1
RECOMMENDED PANEL OPENING DIMENSION

TR	変更	REVISION RECORD	DR	CHK DATE	DATE	BY	REASON
0							
A		EC	BT	175150-1	175150-1	175150-1	175150-1
		FC	BT	175150-1	175150-1	175150-1	175150-1

Copyright ©1988 AMP Corporation, Ltd. All Rights Reserved.		Copyright ©1988 AMP Corporation, Ltd. All Rights Reserved.	
3.50mmピッチ・ユニバーサル・パワー・コネクタ (パネル取付タイプ)		AMP UNIVERSAL POWER CONN. 3.50mm PITCH CAP HOUSING 12 POS (PANEL MOUNT)	
SIZE	12C	REV.	A
SIZE (SCALED)		REV.	A
AMP		AMP	
Tokyo, Japan		Tokyo, Japan	
C-176299		C-176299	
SHEET 1 OF 1		SHEET 1 OF 1	

黒 (BLACK)	12	175299-9
青 (BLUE)	4	-6
黄 (YELLOW)		-4
赤 (RED)		-2
自然色 (NATURAL)	12	175299-1
ハウジング色 (HOUSING COLOR)		型番 (P/N)