
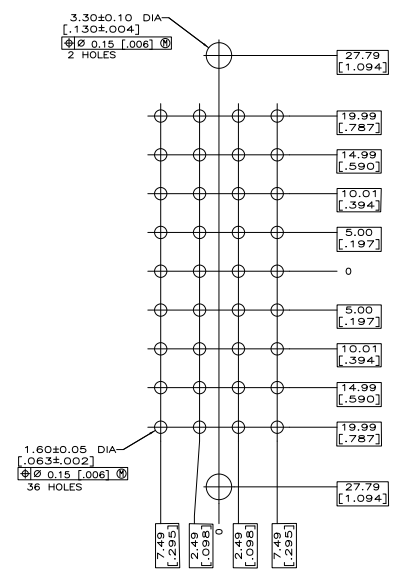
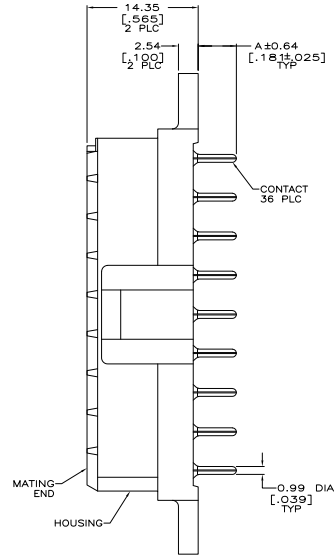


REV	DATE	DESCRIPTION	BY	CHK	APP
M1		REVISED PER ECO-08-029974	03DEC08	HMR	CS
M2		REVISED PER ECO-09-021826	11JAN10	KK	AEC

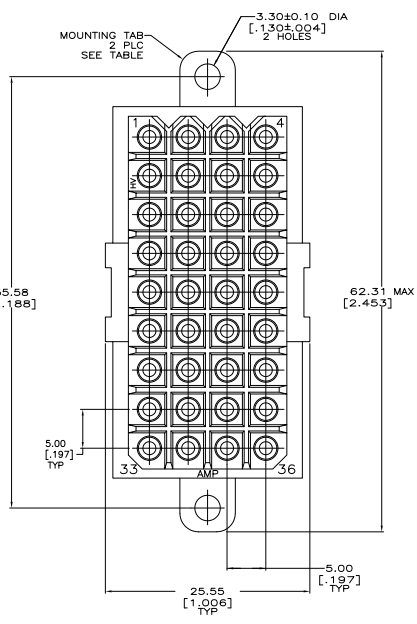

RECOMMENDED LAYOUT

- ▲ NYLON, UL 94-VO RATED, RED.
- ▲ PHOSPHOR BRONZE.
- ▲ 3.81µm [0.000150] MIN TIN-LEAD OVER 1.27µm [0.000050] MIN NICKEL.
- ▲ 0.76µm [0.000030] MIN GOLD FOR A LENGTH OF 4.95 [1.95] MIN FROM MATING END 3.81µm [0.000150] MIN TIN-LEAD FOR A LENGTH OF 4.88 [1.92] MIN ON OPPOSITE END, BOTH OVER 1.27µm [0.000050] MIN NICKEL.
- ▲ .000150 MIN LEAD FREE TIN OVER .000050 MIN NICKEL.
- ▲ 0.76µm [0.000030] MIN GOLD FOR A LENGTH OF 4.95 [1.95] MIN FROM MATING END 3.81µm [0.000150] MIN TIN FOR A LENGTH OF 4.88 [1.92] MIN ON OPPOSITE END, BOTH OVER 1.27µm [0.000050] MIN NICKEL.
- ▲ PRILIMINARY PART NUMBER
- ▲ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REV	DATE	DESCRIPTION	BY	CHK	APP
1		3.50 [1.37]			
2		4.60 [1.81]			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE		REV		REVISED BY		REVISED BY	
INCHES	MM	DATE	REV	DATE	REV	DATE	REV	DATE	REV
108-10033									