

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
FT	0	P	LR	DESCRIPTION	DATE	MIN	APD
		AVS		REVISED PER ECO-11-004820	11MAR11	RK	HMR

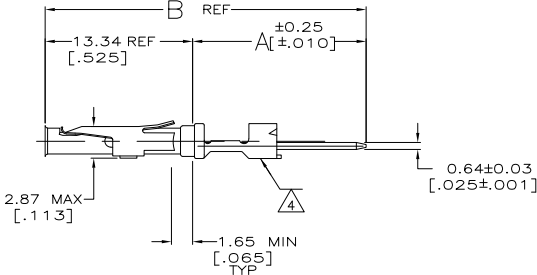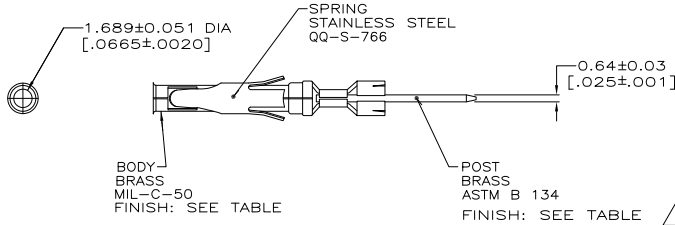

- 1 2.54um [.000100] MIN TIN-LEAD PER MIL-T-10727 OVER
1.27um [.000050] MIN NICKEL PER QQ-N-290.
- 2 2.76um [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR
A LENGTH OF 5.08 [.200] MIN WITH A UNIFORM GRADIENT TO 0.25um
[.000010] MIN GOLD PER MIL-G-45204 ON THE REMAINDER OVER
1.27um [.000050] MIN NICKEL PER QQ-N-290.
- 3 2.54um [.000100] MIN TIN-LEAD PER MIL-T-10727 OVER
1.27um [.000050] MIN NICKEL PER QQ-N-290.
- 4 GOLD PLATING NEED NOT APPEAR ON WIRE BARREL.
- 5 0.76um [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR
A LENGTH OF 5.08 [.200] MIN, GOLD FLASH ON THE REMAINDER OVER
1.27um [.000050] MIN NICKEL PER QQ-N-290.
- 6 .000100 MIN TIN PER MIL-T-10727, OVER
.000050 MIN NICKEL PER QQ-N-290.
- 7 .000030 MIN GOLD PER MIL-G-45204, OVER
.000050 MIN NICKEL PER QQ-N-290.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REV	DESCRIPTION	DATE	MIN	APD	PART NUMBER
PRELIMINARY	34.44 [1.356] 21.11 [.831]	2	△	△	5-66461-7
	29.13 [1.147] 15.80 [.622]	1	△	△	5-66461-6
	29.13 [1.147] 15.80 [.622]	1	△	△	5-66461-5
	29.13 [1.147] 15.80 [.622]	1	△	△	5-66461-4
PRELIMINARY	34.44 [1.356] 21.11 [.831]	2	△	△	5-66461-3
	49.40 [1.945] 36.07 [1.420]	SPECIAL	△	△	5-66461-1
8 OBSOLETE	30.68 [1.208] 17.35 [.683]	SPECIAL	△	△	2-66461-2
8 SUPERSEDED	34.44 [1.356] 21.11 [.831]	2	△	△	2-66461-1
	41.48 [1.633] 28.14 [1.108]	SPECIAL	△	△	2-66461-0
	30.68 [1.208] 17.35 [.683]	SPECIAL	△	△	1-66461-9
	29.64 [1.167] 16.31 [.642]	SPECIAL	△	△	1-66461-8
	27.97 [1.101] 14.63 [.576]	SPECIAL	△	△	1-66461-7
OBSOLETE	25.68 [1.011] 12.34 [.486]	SPECIAL	△	△	1-66461-3
OBSOLETE	43.46 [1.711] 30.12 [1.186]	SPECIAL	△	△	1-66461-0
	39.24 [1.545] 25.91 [1.020]	3	△	△	66461-9
	34.44 [1.356] 21.11 [.831]	2	△	△	66461-8
	29.13 [1.147] 15.80 [.622]	1	△	△	66461-7
	39.24 [1.545] 25.91 [1.020]	3	△	△	66461-6
	34.44 [1.356] 21.11 [.831]	2	△	△	66461-5
	29.13 [1.147] 15.80 [.622]	1	△	△	66461-4
	39.24 [1.545] 25.91 [1.020]	3	△	△	66461-3
	34.44 [1.356] 21.11 [.831]	2	△	△	66461-2
	29.13 [1.147] 15.80 [.622]	1	△	△	66461-1
	B A NO OF TERM POST FINISH BODY FINISH PART NUMBER				

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	07/02/92	TE Connectivity
DRIVER'S UNITS: METERS	7-8-92	TE Connectivity
DATE: 07/02/92	7-10-92	TE Connectivity
DESIGNER: C. STONE	NAME: C. OBERMANN	SOCKET CONTACT, CRIMPED
APPROVED: C. OBERMANN	PRODUCT SPEC: AUTOWIRE	.062 DIA, .025 X .025 POST,
APPLICATION SPEC: -	SIZE: A2	00779
MATERIAL: SEE CALLOUT	WEIGHT: -	C=66461
FINISH: SEE CALLOUT	CUSTOMER DRAWING	SCALE: 4:1 SHEET: 1 of 2 REV: AV5

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.



LOC	DIST	REVISIONS					
FT	0	P	LR	DESCRIPTION	DATE	BY	APPD
-	-	-	-	SEE SHEET 1	-	-	-

8 OBSOLETE

8 OBSOLETE

8 OBSOLETE

49.40 [1.945]	36.07 [1.420]	SPECIAL	△6	△5	9-66461-9
30.68 [1.208]	17.35 [.683]	SPECIAL	△6	△6	7-66461-0
30.68 [1.208]	17.35 [.683]	SPECIAL	△6	△6	6-66461-5
41.48 [1.633]	28.14 [1.108]	SPECIAL	△6	△5	6-66461-4
39.24 [1.545]	25.91 [1.020]	3	△6	△5	6-66461-3
34.44 [1.356]	21.11 [.831]	2	△6	△5	6-66461-2
39.24 [1.545]	25.91 [1.020]	3	△6	△2	6-66461-1
34.44 [1.356]	21.11 [.831]	2	△6	△2	6-66461-0
39.24 [1.545]	25.91 [1.020]	3	△6	△6	5-66461-9
34.44 [1.356]	21.11 [.831]	2	△6	△6	5-66461-8
B	A	NO OF TERM	POST FINISH	BODY FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN C. OBERMAN 07/02/92	 TE Connectivity
DIMENSIONS: INCHES		OK C. STONE 7-8-92	
		APPD C. OBERMANN 7-10-92	NAME
MATERIAL SEE CALLOUT		FINISH SEE CALLOUT	SOCKET CONTACT, CRIMPED .062 DIA, .025 X .025 POST, AUTOWIRE
APPLICATION SPEC		SIZE A2	CAGE CODE 00779
RESTRICTED TO		DRAWING NO C-66461	
CUSTOMER DRAWING		SCALE 4:1	SHEET 2 of 2

D

C

B

A